

AS0104-400/200

1 GHz TO 4 GHz 400/200 WATT DUAL BAND POWER AMPLIFIER



This innovative amplifier combines a compact design with market leading performance. Its ability to operate into any load without fold back makes this an ideal amplifier for all EMC RF immunity testing. The amplifier is supported via Milmega's unique five year parts, labour and shipping warranty and Teseq's local service network.

Designed specifically for radiated EMC testing, this mismatch tolerant amplifier delivers power continuously into the poor and variable match typically associated with EMC antenna.

A selection of remote interfaces are available and the user can select, at time of ordering, either the internal RS232, USB and ethernet or the external RS232 and GPIB unit housed in a 1U module at no additional cost.


Internal RF switches, operated either manually via the front panel or by one of the selected remote interfaces, switch input, output and the forward and reverse sample ports for seamless operation across the wide 1 to 4 GHz range.

- **High reliability GaAs transistor technology**
- **Mismatch tolerant and unconditionally stable**
- **Wide Instantaneous bandwidth**
- **Unique Five year parts, labour and shipping warranty**
- **Integral directional coupler**
- **RS232, USB and Ethernet or RS232 and GPIB**

The GaAs balanced pair design at the core of the amplifier ensures a high reliability, linear performance across the frequency range. This design also ensures that the amplifier will continue to operate at full power even when presented with an open or short circuit at its output.

The unit is powered from a switched mode power supply for high efficiency, high power factor and wide voltage range operation. The unit is air-cooled with integral fans, and is protected against faulty cooling by excess temperature sensing. A safety interlock connector is provided, which the user can short circuit to ground, to put the amplifier into standby mode. Front panel indicators are provided to indicate over-temperature and RF interlock condition.

Measured data

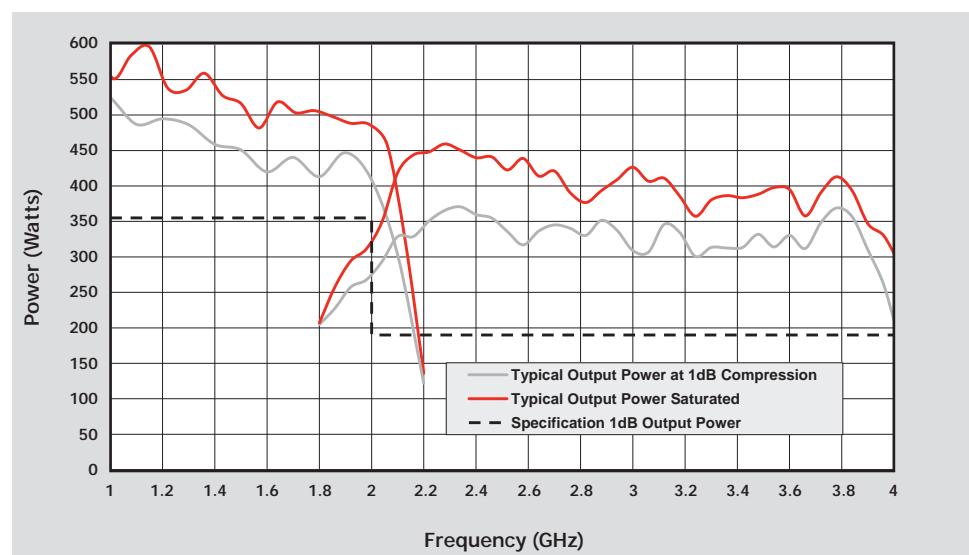

AS0104-400/200

1 GHz TO 4 GHz 400/200 WATT DUAL BAND POWER AMPLIFIER

Key RF Parameters

Frequency range	1 to 4 GHz	
Sub ranges	1 to 2 GHz	2 to 4 GHz
Rated output power	398 W minimum	214 W minimum
Power at 1 dB gain compression (P1dB)	355 W minimum	190 W minimum
Harmonics at 250 watts	-20 dBc typical	
Gain	51 dB	48 dB
Gain variation with frequency	+/-2 dB	
Maximum input power (no damage)	+15 dBm	

Impedance/VSWR

Output VSWR tolerance	Infinite any phase	
Stability	Unconditional	
Output impedance	50 Ohm	
Output VSWR	2:1 typical	
Input VSWR	2:1 max	

Additional RF Data

Third order intercept point IP3	10 dB > P1dB	
Spurious	70 dBc max (80 dBc typical)	
Noise figure	6 dB	8 dB
RF connector style	Type N female	

Electrical and Interfaces

Remote control (either option included in price)	Internal RS232, USB and ethernet or RS232 and GPIB in additional external 1U high unit
Safety interlock	Via rear panel D-sub connector
Supply voltage (single or three phase)	90 to 132 or 180 to 240 VAC +/-10%
Supply frequency	47 to 63 Hz
Supply power	4.5 kVA

MILMEGA
Park Road, Ryde, Isle of Wight, PO33 2BE, UK
T +44 (0) 1983 618004 F +44 (0) 1983 811521
sales@milmega.co.uk www.milmega.co.uk
www.teseq.com

© November 2013 MILMEGA
Specifications subject to change without notice.
Teseq® is an ISO-registered company. Its products
are designed and manufactured under the strict
quality and environmental requirements of the ISO
9001. This document has been carefully checked.
However, Teseq® does not assume any liability for
errors or inaccuracies.

Physical/Environmental

Case dimensions	19 inch, 15U case, 776 mm deep
Mass	170 kg
Operating temperature range	0 to 40° C (storage -40 to 70° C)



a TESEQ Company