

X3 Frequency Multiplier

50Ω Output 300 to 450 MHz

RMK-3-451+



CASE STYLE: TT1224

PRICE: \$8.95 ea. QTY (10-49)

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Input Power	20 dBm

Pin Connections

INPUT	1
OUTPUT	4
GROUND	2,3,5,6

Features

- broadband
- low conversion loss, 13.2 dB typ.
- high rejection F2, -52 dBc typ.; F4, -50 dBc typ.
- low cost
- aqueous washable

Applications


- synthesizers
- local oscillators
- satellite up and down converters

Electrical Specifications

MULTIPLICATION FACTOR	FREQUENCY (MHz)		INPUT POWER (dBm)		CONVERSION LOSS (dB)	*HARMONIC OUTPUT (dBC)		
	F1 Input	F3 Output	Min.	Max.		F1 Typ. Min.	F2 Typ. Min.	F4 Typ. Min.
3	100-150	300-450	12	17	13.2 16	4 -7	52 40	50 37

* Harmonics of input frequency below the power level of F3

Outline Drawing

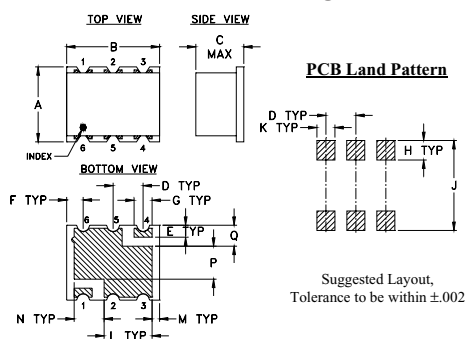


PCB Land Pattern

Suggested Layout, Tolerance to be within ±.002

Outline Dimensions (inch)

A	B	C	D	E	F	G	H
.25	.31	.16	.100	.040	.055	.060	.065
6.35	7.87	4.06	2.54	1.02	1.40	1.52	1.65
J	K	L	M	N	P	Q	wt.
.300	.060	.160	.025	.100	.110	.070	grams
7.62	1.52	4.06	0.64	2.54	2.79	1.78	0.16

Demo Board MCL P/N: TB-393 Suggested PCB Layout (PL-258)

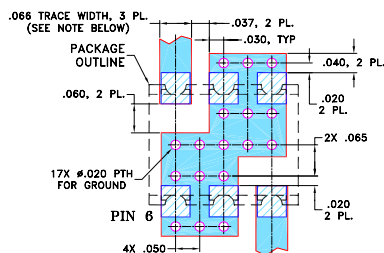

NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS R04350B WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.

2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

3. DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)

4. DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Notes

A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.

B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.





C. The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/MCLStore/terms.jsp



www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

Typical Performance Data

Input Frequency (MHz)	INPUT RF= 12 dBm				INPUT RF= 17 dBm			
	Conversion Loss (dB)	F3 (-dBc)	F1 (-dBc)	F4 (-dBc)	Conversion Loss (dB)	F3 (-dBc)	F1 (-dBc)	F4 (-dBc)
100.00	13.40	4.43	53.95	54.52	14.49	7.11	52.92	47.80
110.00	13.09	3.00	50.23	49.20	14.10	5.78	50.69	49.32
120.00	12.98	1.49	57.22	56.49	13.88	4.41	57.92	58.21
130.00	13.10	-0.05	62.62	71.51	13.80	3.03	67.71	70.53
140.00	13.22	-1.53	61.72	72.27	14.02	1.47	66.97	71.68
150.00	13.40	-3.09	61.54	71.44	14.37	-0.19	66.43	70.17

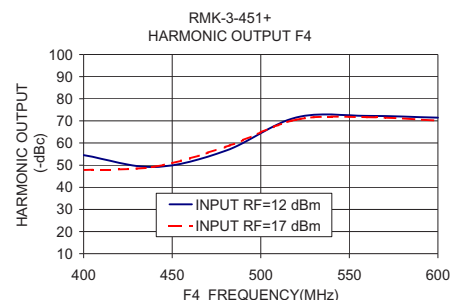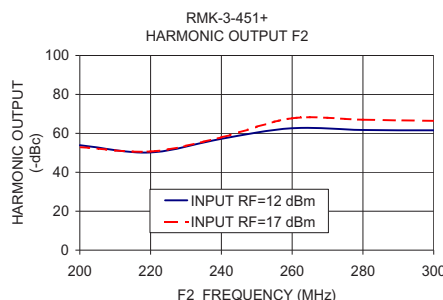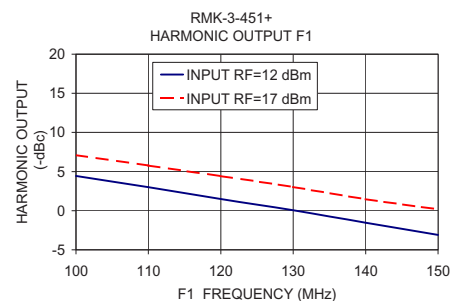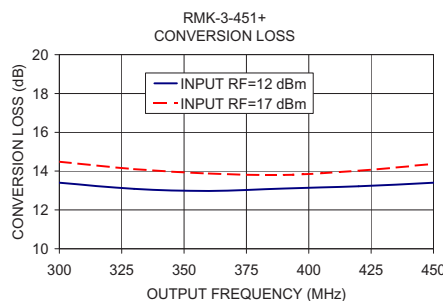

REV. OR
M117512
RMK-3-451+
ED-13291/1
DJ/CP
140909
Page 1 of 1