Surface Mount

RF Transformer

0.02 to 250 MHz

T4-6T+



CASE STYLE: W38 PRICE: \$5.65 ea. QTY (1-9)

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Maximum Ratings

Operating Temperature	-20°C to 85°C			
Storage Temperature	-55°C to 100°C			
RF Power	0.25W			
DC Current	30mA			
Permanent damage may occur if any of these limits are evened				

Pin Connections

PRIMARY DOT	4
PRIMARY	6
SECONDARY DOT	3
SECONDARY	1
SECONDARY CT	2
NOT USED	5

Applications

Features


• impedance matching

• excellent return loss

plug-in (X65) leads

• wideband, 0.02 to 250 MHz

• push-pull amplifier



FREQUENCY INSERTION LOSS* RATIO (MHz) (Secondary/Primary) 3 dB 2 dB 1 dB

Transformer Electrical Specifications


• also available with surface mount gull wing (KK81)


Outline Dimensions (inch)

F	E	D	C	B	A
. 020	. 042	. 010	. 23	. 27	. 30
0.51	1.07	0.25	5.84	6.86	7.62
wt	L	K	J	H	G
grams	. 036	. 31	. 09	. 05	.100
0.50	0.91	7.87	2.29	1.27	2.54

Typical Performance Data

FREQUE (MHz		N INPUT R. LOSS (dB)	
0.02	2.30	3.08	
0.05	0.89	5.47	
0.10	0.48	9.35	
0.20	0.36	15.86	
0.50	0.31	20.74	
1.00	0.26	23.39	
100.00	0.42	14.83	
125.01	0.50	14.73	
150.00	0.55	15.23	
250.00	0.99	15.91	



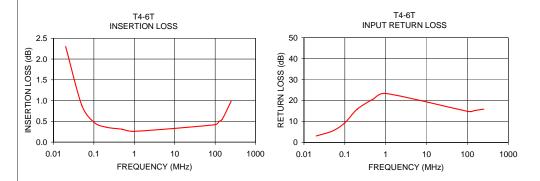

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.

 B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.

 C. The parts covered by this specification document are subject to Mini-Circuit satandard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

^{*}Insertion Loss is referenced to mid-band loss, 0.25 dB typ.