

Voltage Controlled Oscillator

ROS-2700-1419+

Linear Tuning 2500 to 2700 MHz

Features

- linear tuning characteristics
- low pulling
- aqueous washable

Applications

- wireless communications
- WiMAX



CASE STYLE: CK605

PRICE: \$15.95 ea. QTY (5-49)

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Electrical Specifications

MODEL NO.	FREQ. (MHz)		POWER OUTPUT (dBm)	PHASE NOISE				TUNING					NON HARMONIC SPURIOUS (dBc)	HARMONICS (dBc)		PULLING pk-pk @12 dB (MHz)	PUSHING (MHz/V)	DC OPERATING POWER	
				dBc/Hz SSB at offset frequencies,kHz				VOLTAGE RANGE (V)	SENSI- TIVITY (MHz/V)	PORT CAP (pF)	3 dB MODULATION BANDWIDTH (MHz)							Vcc (volts)	Current (mA)
	Typ.																		
	Min.	Max.		Typ.	1	10	100				1000	Min.		Max.	Typ.				
ROS-2700-1419+	2500	2700	+6	-74	-98	-119	-139	0.5	8	40-45	30	30	-90	-18	-10	2	4.5	5	36

Pin Connections


RF OUT	10
VCC	14
V-TUNE	2
GROUND	1,3,4,5,6,7,8,9,11,12,13,15,16

Maximum Ratings


Operating Temperature	-55°C to 85°C
Storage Temperature	-55°C to 100°C
Absolute Max. Supply Voltage (Vcc)	7V
Absolute Max. Tuning Voltage (Vtune)	10V
All specifications	50 ohm system

Permanent damage may occur if any of these limits are exceeded.

Outline Drawing

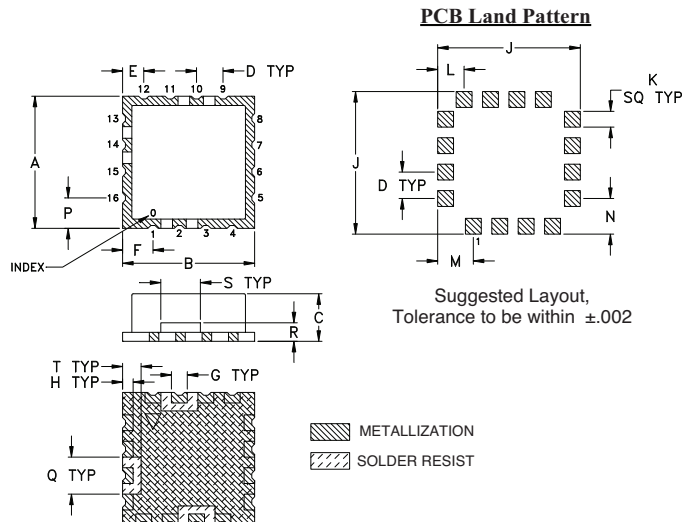

Demo Board MCL P/N: TB-10 Suggested PCB Layout (PL-012)

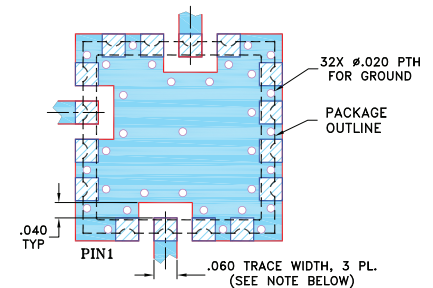

NOTES:

- TRACE WIDTH IS SHOWN FOR FR4 WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
- BOTTOM SIDE OF THE BOTTOM IS CONTINUOUS GROUND PLANE.
- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
- DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Outline Dimensions (inch mm)

A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	R	S	T	wt.
.500	.500	.180	.100	.080	.115	.060	.040	.540	.060	.100	.135	.135	.115	.140	.070	.150	.070	grams
12.70	12.70	4.57	2.54	2.03	2.92	1.52	1.02	13.72	1.52	2.54	3.43	3.43	2.92	3.56	1.78	3.81	1.78	1.0



P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuits' applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

For detailed performance specs & shopping online see web site

REV. OR
M105224
EDR-8172
ROS-2700-1419+
RAV
121002
Page 1 of 2


Performance Data & Curves*

ROS-2700-1419+


V TUNE	TUNE SENS (MHz/V)	FREQUENCY (MHz)			POWER OUTPUT (dBm)			Icc (mA)	HARMONICS (dBc)			FREQ. PUSH (MHz/V)	FREQ. PULL (MHz)	PHASE NOISE (dBc/Hz) at offsets				FREQ OFFSET (KHz)	PHASE NOISE at 2600 MHz (dBc/Hz)
		-55°C	+25°C	+85°C	-55°C	+25°C	+85°C		F2	F3	F4			1kHz	10kHz	100kHz	1MHz		
0.00	40.27	2434.2	2421.7	2410.9	6.09	6.07	5.84	31.05	-17.0	-30.8	-37.4	4.47	1.73	-74.2	-96.6	-117.0	-136.8	1.0	-75.45
0.25	37.70	2443.9	2431.8	2421.3	6.14	6.10	5.82	31.05	-17.3	-31.1	-36.6	4.47	2.46	-74.4	-96.8	-117.3	-137.3	2.0	-82.11
0.50	36.44	2453.1	2441.2	2430.9	6.18	6.14	5.83	31.06	-16.8	-30.8	-36.3	4.47	2.71	-74.0	-96.3	-117.7	-137.4	3.5	-89.35
1.00	36.03	2471.1	2459.4	2449.1	6.27	6.22	5.90	31.06	-16.5	-30.8	-37.4	4.47	2.24	-74.1	-97.4	-117.6	-137.6	6.0	-93.62
1.50	37.16	2489.5	2477.5	2467.1	6.34	6.26	5.93	31.07	-17.4	-31.9	-37.7	4.47	1.14	-74.8	-97.7	-117.8	-137.5	8.5	-97.76
2.00	39.29	2508.6	2496.3	2485.8	6.43	6.28	5.95	31.10	-18.2	-32.9	-38.7	4.47	1.36	-74.5	-96.3	-117.4	-137.3	10.0	-97.61
2.50	41.22	2528.7	2516.3	2505.4	6.57	6.38	5.98	31.11	-17.2	-32.4	-39.2	4.49	2.50	-74.4	-97.7	-118.3	-138.3	20.8	-105.77
3.00	42.99	2549.6	2537.0	2526.0	6.50	6.47	6.09	31.13	-17.5	-32.8	-40.1	4.54	2.52	-75.4	-97.3	-118.7	-138.6	35.5	-109.64
3.50	44.18	2571.5	2558.7	2547.3	6.44	6.41	6.05	31.16	-18.7	-34.2	-43.3	4.56	0.85	-73.2	-97.6	-118.5	-138.4	60.7	-114.37
4.00	45.40	2594.1	2581.0	2569.4	6.38	6.35	5.99	31.20	-17.7	-32.9	-43.9	4.53	2.08	-74.0	-98.3	-118.8	-138.3	86.7	-117.87
4.50	44.60	2616.7	2603.6	2591.8	6.35	6.31	5.96	31.24	-17.4	-33.0	-43.9	4.57	2.27	-75.4	-98.0	-118.9	-139.0	100.0	-118.71
5.00	44.04	2639.0	2625.9	2614.0	6.27	6.30	5.95	31.27	-18.2	-33.9	-42.1	4.57	1.05	-74.8	-98.6	-118.7	-138.8	148.1	-122.13
5.50	43.48	2661.1	2647.8	2635.8	6.19	6.30	5.95	31.32	-17.2	-32.6	-41.9	4.62	1.63	-74.9	-98.2	-119.1	-139.1	177.0	-123.63
6.00	42.90	2682.7	2669.5	2657.4	6.22	6.22	5.93	31.37	-17.0	-32.1	-41.0	4.67	2.20	-73.7	-97.9	-119.0	-138.7	211.6	-125.48
6.50	41.38	2703.8	2690.7	2678.5	6.26	6.19	5.90	31.43	-17.6	-32.9	-36.9	4.65	1.63	-75.4	-97.7	-119.3	-139.0	302.4	-128.77
7.00	40.43	2724.4	2711.3	2699.1	6.36	6.25	5.96	31.49	-16.7	-31.9	-37.2	4.70	0.77	-75.6	-98.2	-119.2	-138.9	361.5	-129.83
7.25	39.77	2734.5	2721.5	2709.2	6.35	6.22	6.02	31.52	-16.3	-31.7	-39.3	4.71	1.49	-73.4	-98.8	-119.5	-139.2	507.5	-132.91
7.50	39.56	2744.6	2731.4	2719.2	6.35	6.17	6.03	31.55	-16.2	-31.4	-41.0	4.71	1.96	-74.7	-99.3	-119.6	-139.3	606.7	-134.56
7.75	39.64	2754.4	2741.3	2729.1	6.38	6.12	6.02	31.58	-16.6	-31.6	-41.8	4.71	2.00	-76.2	-98.4	-119.9	-139.4	851.6	-137.51
8.00	39.32	2764.2	2751.2	2738.9	6.40	6.13	6.02	31.61	-16.8	-33.1	-44.3	4.76	1.94	-76.8	-98.2	-119.9	-139.4	1000.0	-138.76

*at 25°C unless mentioned otherwise


ROS-2700-1419+
Frequency and Tuning Sensitivity

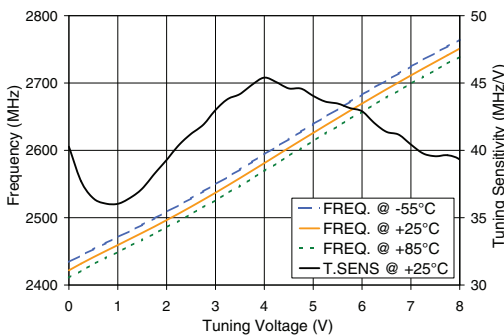


ROS-2700-1419+
Power Output

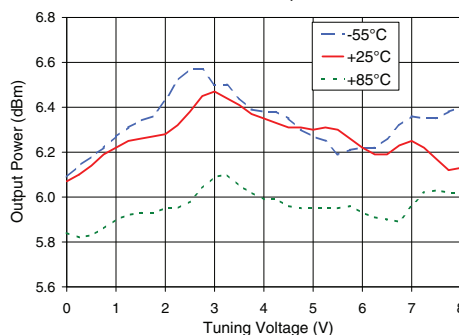


ROS-2700-1419+
Harmonics Level

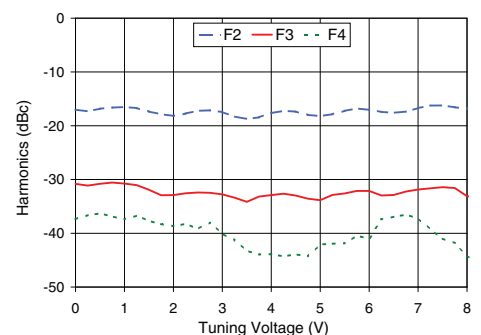

ROS-2700-1419+
Frequency Pulling & Pushing (Vcc ± 5%)

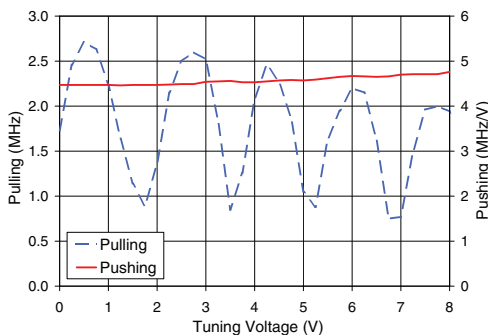

ROS-2700-1419+
Phase Noise Vs. Tuning Voltage

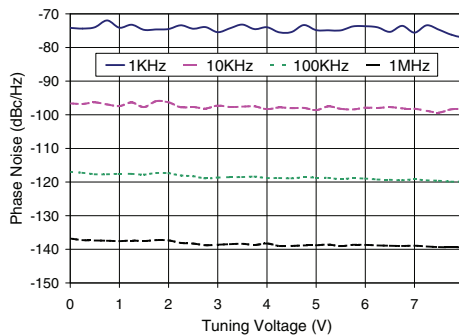

ROS-2700-1419+
Phase Noise

