



Right-Angle Adapter

RA-50





Features

- Low Insertion Loss
- 2.40 mm Connectors
- Convenient easy-grip jacket for effortless loosening




Electrical Specifications - Specifications guaranteed from -55 to +100°C, measured in a 50-Ohm system.


Parameter	Frequency Range	Min	Typ	Max
Insertion Loss (dB)	DC to 50.0 GHz		0.30	1.0
VSWR			15	
Group Delay (ps)			100	
RF Power (W)			10	

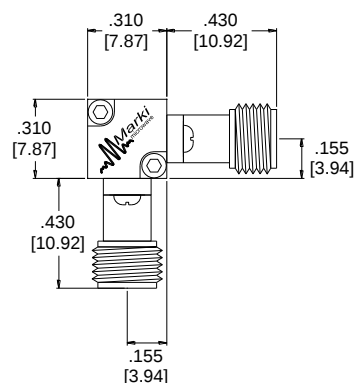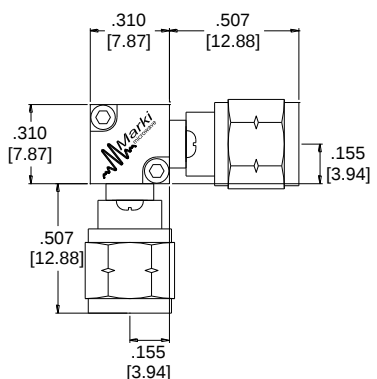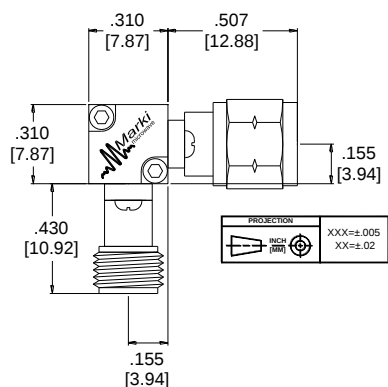

RA-50FM



RA-50MM



RA-50FF



Right-Angle Adapter

Page 2

RA-50
DC to 50.0 GHz

Typical Performance

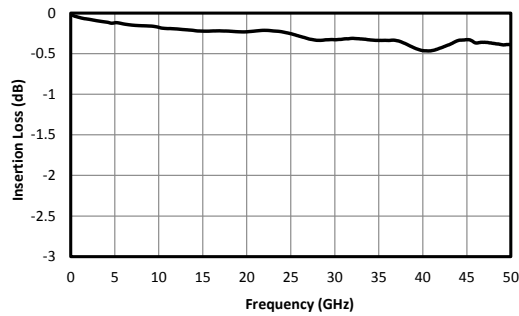


Fig. 1. Insertion Loss

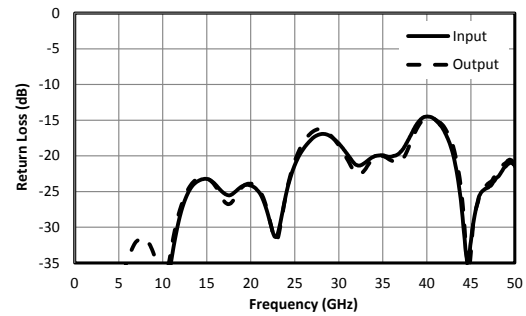


Fig. 2. Return Loss

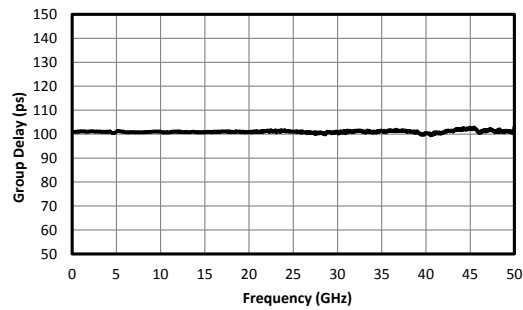


Fig. 3. Group Delay

Part Number Options

Please specify package style by adding to model number.

Package Style(s)	Example
MM (Male 2.40 mm/Male 2.40 mm) FF (Female 2.40 mm/Female 2.40 mm) FM (Female 2.40 mm/Male 2.40 mm)	RA-50MM

DATA SHEET NOTES:

1. Specifications are subject to change without notice. Contact Marki Microwave for the most recent specifications and data sheets.

Marki Microwave reserves the right to make changes to the product(s) or information contained herein without notice. Marki Microwave makes no warranty, representation, or guarantee regarding the suitability of its products for any particular purpose, nor does Marki Microwave assume any liability whatsoever arising out of the use or application of any product.

© Marki Microwave, Inc.



215 Vineyard Court, Morgan Hill, CA 95037 | Ph: 408.778.4200 | Fax 408.778.4300 | info@markimicrowave.com

www.markimicrowave.com

01/06/14