




FBV-160

BANDPASS FILTER

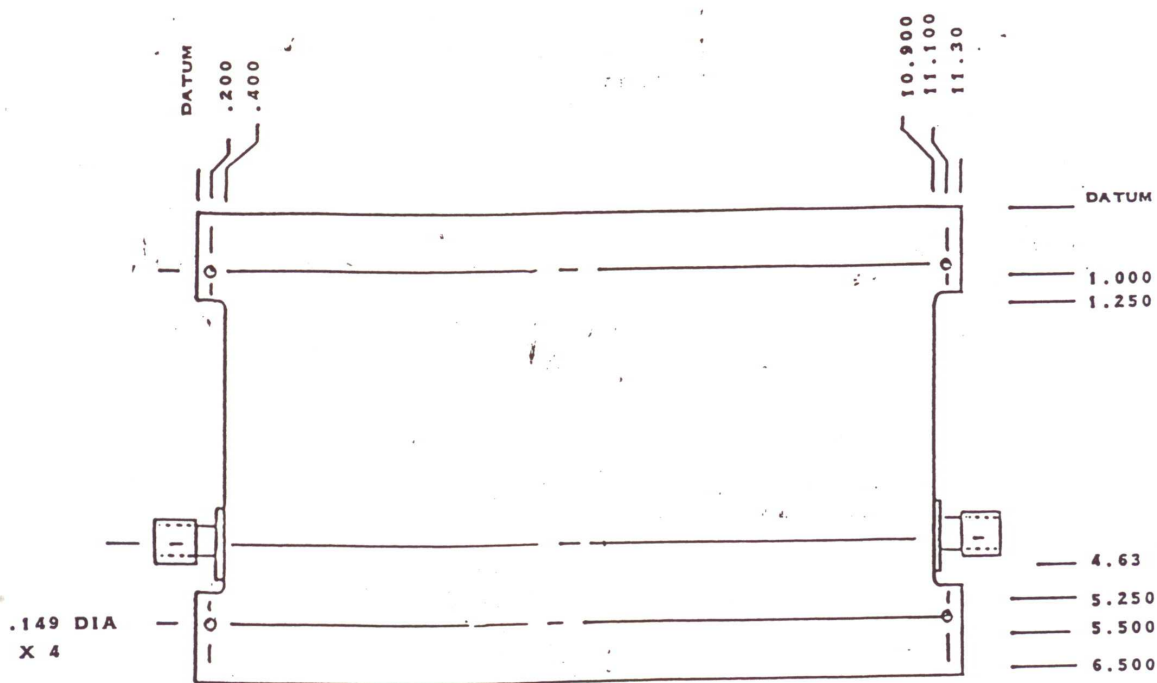

PERFORMANCE CHARACTERISTICS

PASSBAND INSERTION LOSS, 292 to 318 MHz:	1.0 dB max.
PASSBAND VSWR, 292 TO 318 MHz:	1.4:1 max.
REJECTION: 0 to 270 MHz:	80 dB min.
340 to 1000 MHz:	90 dB min.
RF POWER, 292 to 318 MHz:	400 W CW
CONNECTORS:	Type N-female
WEIGHT:	Approx. 3.7 lbs.