



5300 Beethoven Street, Los Angeles, CA 90066
TEL: (310)306-5556 • FAX: (310)821-7413
WEB: www.ophirrf.com • E-MAIL: sales@ophirrf.com

MODEL 5136A-002

0.8 - 2.0 GHz
500 WATTS
LINEAR POWER RF AMPLIFIER

Solid State Broadband High Power RF Amplifier

The 5136A-002 is a 500 Watt broadband amplifier that covers the 0.8 – 2.0 GHz frequency range. This small and lightweight amplifier utilizes Class A/AB linear power devices that provide an excellent 3rd order intercept point, high gain, and a wide dynamic range.

Due to robust engineering and employment of the most advanced devices and components, this amplifier achieves high efficiency operation with proven reliability.

	Parameter	Specification @ 25° C
<u>Electrical</u>		
1	Frequency Range	0.8 – 2.0 GHz
2	Saturated Output Power	500 Watts min.
3	Power Output @ 1dB Comp.	300 Watts min
4	Small Signal Gain	+58 dB min
5	Power Flatness @ each band	+/- 2.5 dB max with no ALC +/- 1 dB max with internal leveling
6	IP ₃	+65 dBm typical
7	Input VSWR	2:1 max
8	Harmonics	-20 dBc typical
9	Spurious Signals	< -60 dBc typical
10	Input/Output Impedance	50 Ohms nominal
11	AC Input Power	3000 Watts max
12	AC Input	180 – 264 VAC, single phase
13	RF Input	+10 dBm max
14	RF Input Signal Format	CW/AM/FM/PM/Pulse
15	Class of Operation	A/AB
<u>Mechanical</u>		
16	Dimensions	19" x 14" x 26"
17	Weight	150 lb. max
18	Connectors	Type-N (RF Input) 7/16 DIN (RF Output)
19	Grounding	Chassis
20	Cooling	Internal Forced Air
<u>Environmental</u>		
21	Operating Temperature	0° C to +50° C
22	Operating Humidity	95% Non-condensing
23	Operating Altitude	Up to 10,000' Above Sea Level
24	Shock and Vibration	Normal Truck Transport

5136A-002 Features

- Front Panel Mounted Input Connector
- Rear Panel Mounted Output Connector
- Front Panel Mounted Controller

Specifications subject to change without notice



5300 Beethoven Street, Los Angeles, CA 90066

TEL: (310)306-5556 • FAX: (310)821-7413

WEB: www.ophirrf.com • E-MAIL: sales@ophirrf.com

MODEL 5136A-002

0.8 - 2.0 GHz

500 WATTS

LINEAR POWER RF AMPLIFIER

FRONT PANEL CONTROLLER FEATURES

- ◇ Forward Power Monitoring
- ◇ Reflected Power Monitoring
- ◇ Gain Control (Continuously Variable VVA 20dB)
- ◇ Fault Status
- ◇ Full Protection Of any VSWR Condition, Open or Short, into any Phase Angle
- ◇ Remote Control Access via the Ethernet, RS-232, or IEEE-488 Communications ports
- ◇ Integrated Automatic Leveling Control to allow end-user to maintain output even with variances in temperature, phase or input RF level
- ◇ Standby/Enable Control
- ◇ Front Panel Display for easy viewing of System Status Locally
- ◇ Keypad buttons for full local control

CIRCUIT CONTROL

- ◇ Standby (amplifier disable)
- ◇ Gain/power setting with 20dB range
- ◇ VSWR protection Reset
- ◇ ALC On/ Off

CIRCUIT INDICATIONS

- ◇ Forward Power
- ◇ Reflected power
- ◇ VSWR Fault
- ◇ Temp Fault
- ◇ Gain Setting (VVA) percentage

CIRCUIT PROTECTIONS

- ◇ Thermal Overload
- ◇ Over Current
- ◇ Over Voltage
- ◇ Open or Short VSWR Conditions (*With Front Panel Controller*)



Front Panel Connector Version Shown

Specifications subject to change without notice




5300 Beethoven Street, Los Angeles, CA 90066
TEL: (310)306-5556 • FAX: (310)821-7413
WEB: www.ophirrf.com • E-MAIL: sales@ophirrf.com

MODEL 5136A-002

0.8 - 2.0 GHz

500 WATTS

LINEAR POWER RF AMPLIFIER

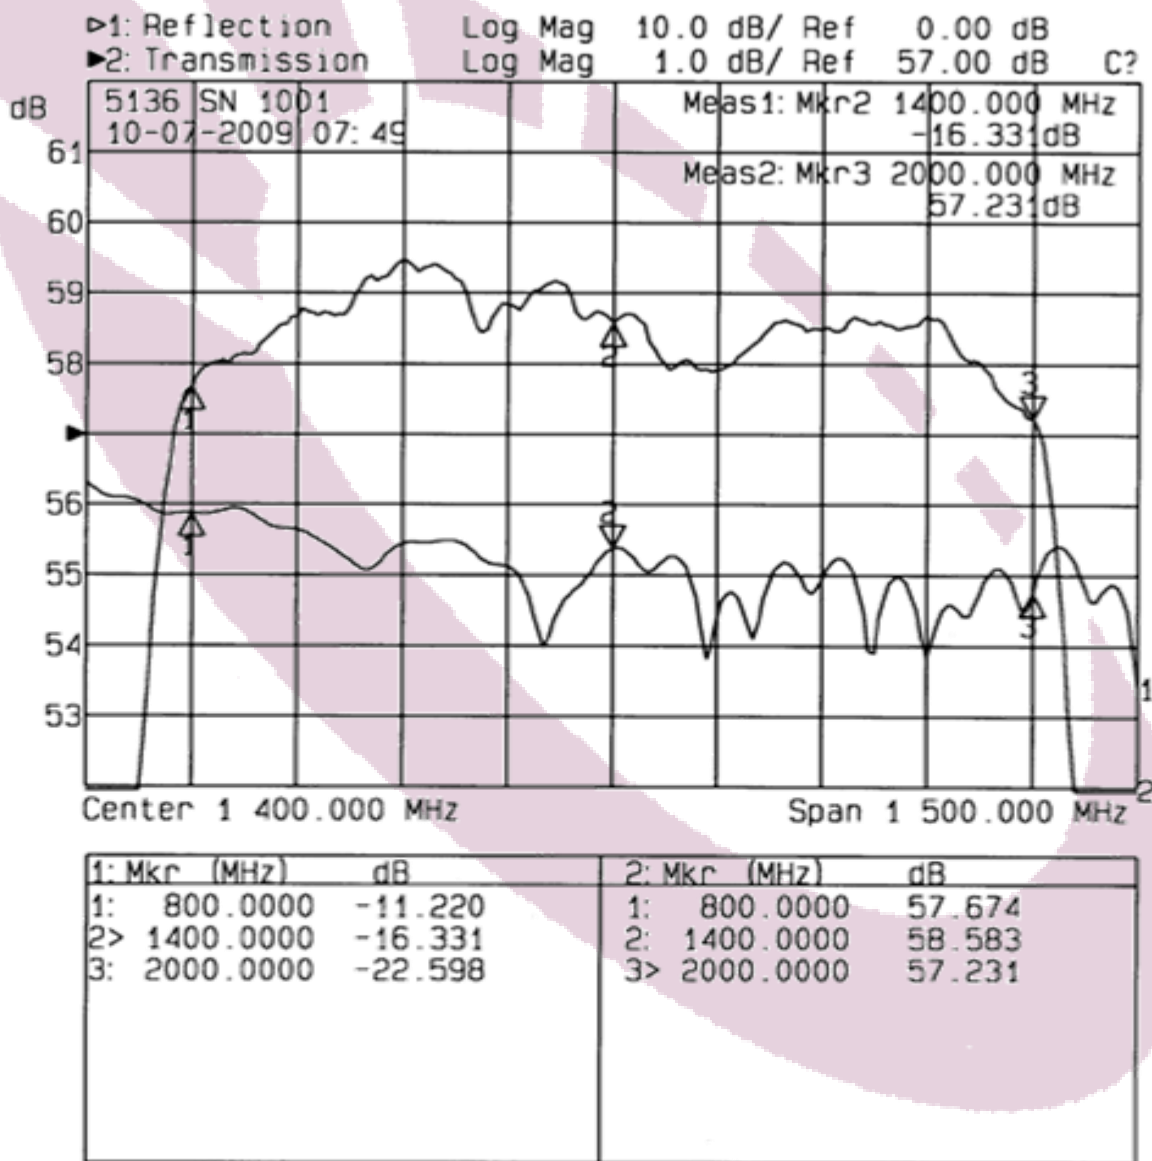

*Pin @ CuBm
Port*

Specifications subject to change without notice