

X5 Frequency Multiplier

RMK-5-52+

50Ω Output 250 to 500 MHz



CASE STYLE: TT1224

The Big Deal

- Low conversion loss, 22 dB typ.
- High harmonic suppression: F4, 56 dBc; F6, 57 dBc
- Small size, 0.25 x 0.31 x 0.16"

Product Overview

Mini-Circuits' RMK-5-52+ frequency multiplier provides a multiplication factor of 5 converting input frequencies from 50 to 100 MHz into output frequencies from 250 to 500 MHz, supporting applications including synthesizers, local oscillators, satellite up and down converters and more. This model supports input power of +17 dBm with conversion loss of 22 dB and excellent harmonic suppression. The multiplier comes housed in a miniature surface-mount package (0.25 x 0.31 x 0.16"), ideal for dense circuit board layouts.

Feature	Advantages
Low conversion loss, 22 dB	With a low conversion loss, the unit produces higher output power, reducing the need for amplification.
Very good harmonic suppression • F4, 56 dBc • F6, 57 dBc	Reduces spurious signals and the need for additional filtering
Low cost	Provides an easy, cost-effective solution for generating high-frequency signals from a lower frequency signal source.
Small size	Measuring only 0.25 x 0.31 x 0.16", the RMK-5-52+ saves space in crowded PCB layouts.

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



X5 Frequency Multiplier

50Ω Output 250 to 500 MHz

RMK-5-52+



CASE STYLE: TT1224
PRICE: \$19.95 ea. QTY (10-49)

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Input Power	20 dBm
Permanent damage may occur if any of these limits are exceeded.	

Pin Connections

INPUT	1
OUTPUT	4
GROUND	2,3,5,6

Features

- low conversion loss, 22 dB typ.
- high rejection of adjacent harmonics, 56 dBc typ.
- aqueous washable

Applications


- synthesizers
- local oscillators
- satellite up and down converters

Electrical Specifications at 25°C

Parameter		Min.	Typ.	Max.	Unit
Multiplier Factor			5		
Frequency Range, Input (F1)		50	—	100	MHz
Frequency Range, Output (F5)		250	—	500	MHz
Input Power		—	17	—	dBm
Conversion Loss		—	22	26	dB
Harmonic Output*	F1	-8	2	—	-dBc
	F2	40	63	—	
	F3	-12	-2.5	—	
	F4	40	56	—	
	F6	40	57	—	
	F7	-1	6	—	

* Harmonics of input frequency below the power level of F5

Outline Drawing

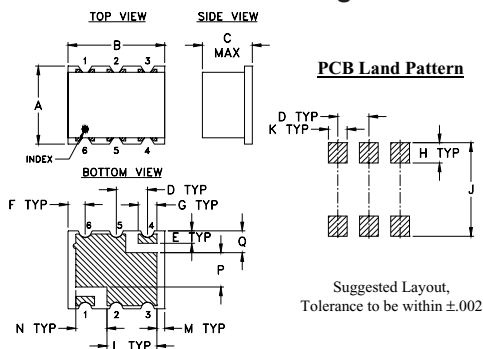


Suggested Layout,
Tolerance to be within ±.002

Outline Dimensions (inch)

A	B	C	D	E	F	G	H
.25	.31	.16	.100	.040	.055	.060	.065
6.35	7.87	4.06	2.54	1.02	1.40	1.52	1.65
J	K	L	M	N	P	Q	wt.
.300	.060	.160	.025	.100	.110	.070	grams
7.62	1.52	4.06	0.64	2.54	2.79	1.78	0.16

Demo Board MCL P/N: TB-393 Suggested PCB Layout (PL-258)

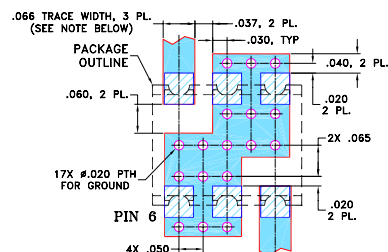

- NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
3. DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
4. DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Notes








- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. OR
M139968
RMK-5-52+
ED-14845
AV/CP/AM
140909
Page 2 of 3

RMK-5-52+

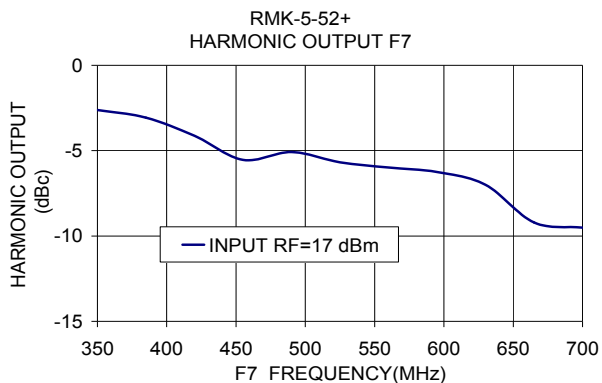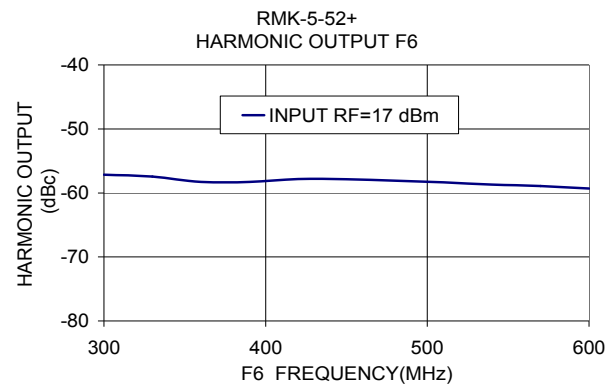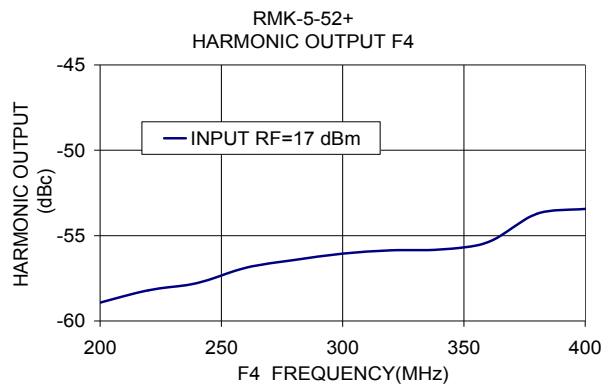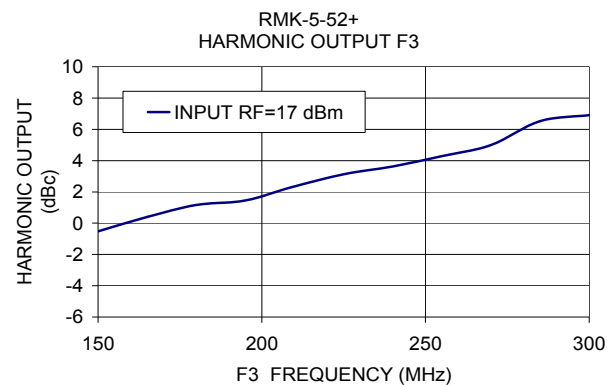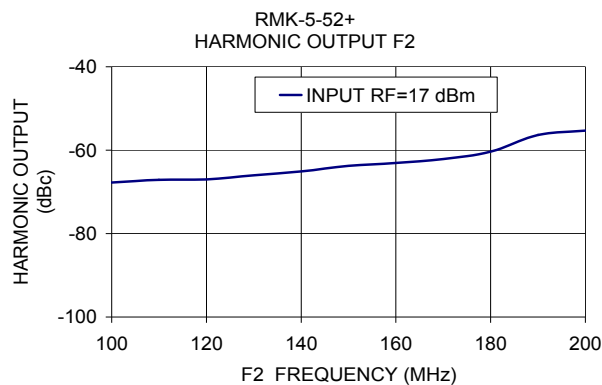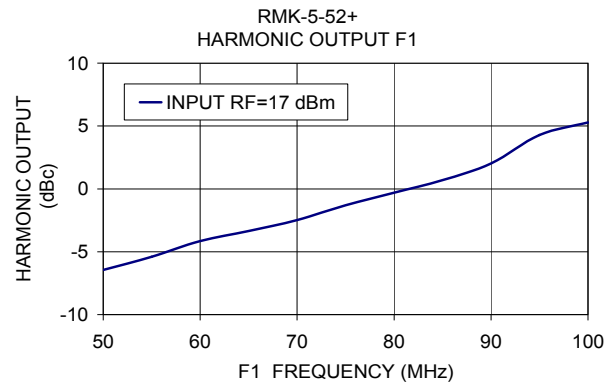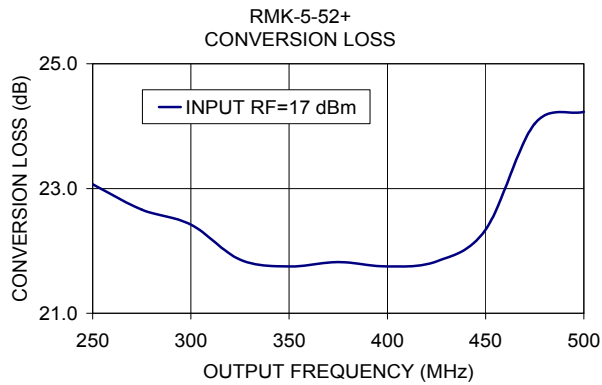

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

