



TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,
Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: tstsales@mail.taisaw.com Web: www.taisaw.com

Approval Sheet For Product Specification

Issued Date: Mar, 2, 2007

Product Name: SAW Filter 169.2 MHz SMD 5.0X7.0 mm

TST Parts No.: TB0484A

Customer Parts No.: _____

Company: _____

Division: _____

Approved by : _____

Date: _____

Checked by: _____ Bob Chau

Approval by: _____ Francis Chen

Date: _____ 3, 2, 2007



TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,

Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: tstsales@mail.taisaw.com

Web: www.taisaw.com

SAW Filter 169.2MHz

MODEL NO.:TB0484A

REV. NO.:1

A. MAXIMUM RATING:

1. Input Power Level: 15 dBm
2. DC Voltage : 5V
3. Operating Temperature: -40°C to +85°C
4. Storage Temperature: -50°C to +95°C


RoHS Compliant
Lead free
Lead-free soldering

B. ELECTRICAL CHARACTERISTICS:

Item	Unit	Min.	Type.	Max.	Note
Center frequency Fc	MHz	-	169.2	-	-
Insertion loss at center frequency ILc	dB	-	3.0	7.0	-
Ripple (169.19625~169.20375)	dB	-	±0.2	±1	-
Attenuation (relative to ILc)					
168.2 ~ 168.3025 MHz	dB	30	50	-	-
168.3025 ~ 169.1 MHz	dB	7	21	-	-
169.3 ~ 170.0975 MHz	dB	7	21	-	-
170.0975 ~ 170.2 MHz	dB	30	50	-	-
Temperature coefficient of frequency TCf	-0.034 ppm/C^2				

Note1. Considering -21 KHz frequency shift from -40°C to +85°C

C.OUTLINE DRAWING:

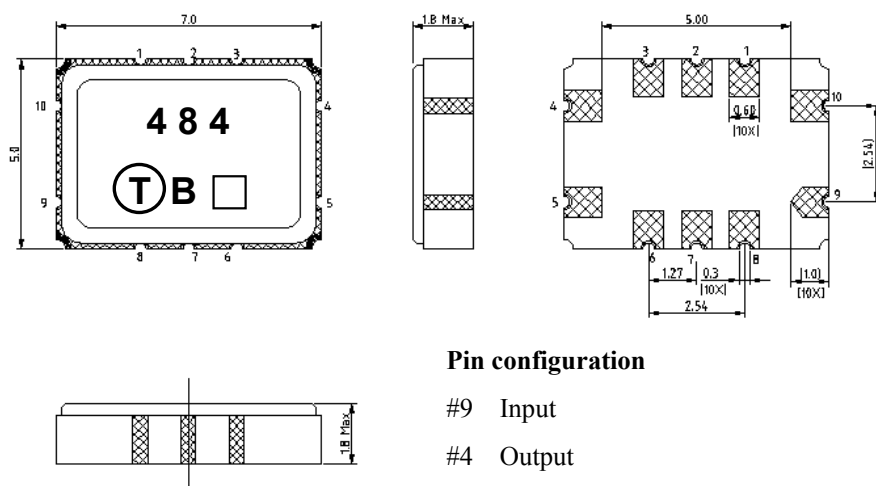

Pin configuration

#9 Input

#4 Output

#10 Balance input or input ground

#5 Balance output or output ground

#1,2,3,6,7,8 To be grounded

□ Date code


Unit mm

Product Year Code


Year	2001 2005	2002 2006	2003 2007	2004 2008
Product Code	B	b	<u>B</u>	<u>b</u>

D. MEASUREMENT CIRCUIT:



50 Ohm Test circuit (single-ended / single-ended)

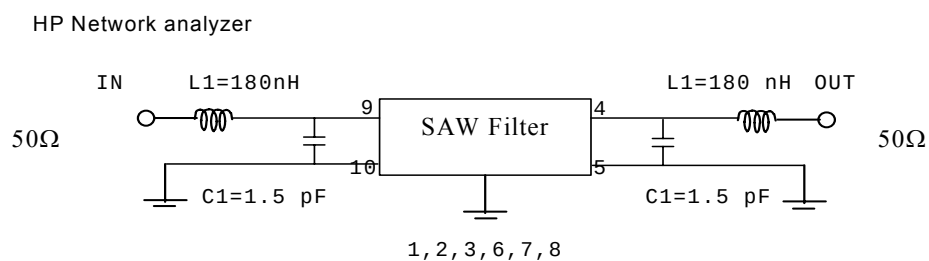

E. PCB Footprint:

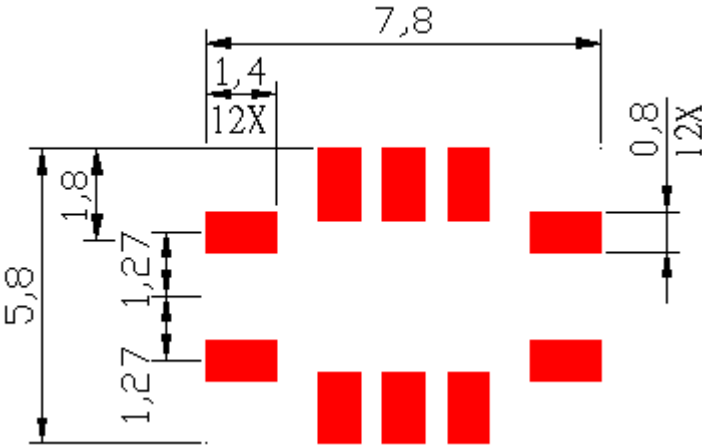


F. Frequency Characteristics :

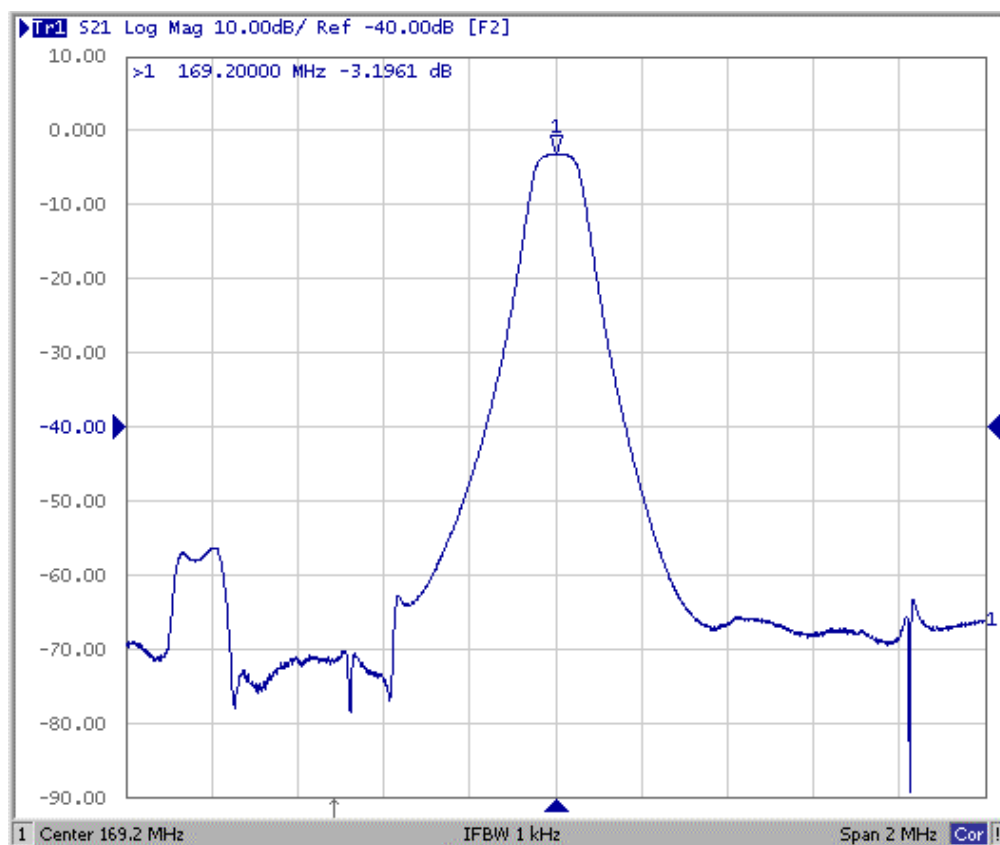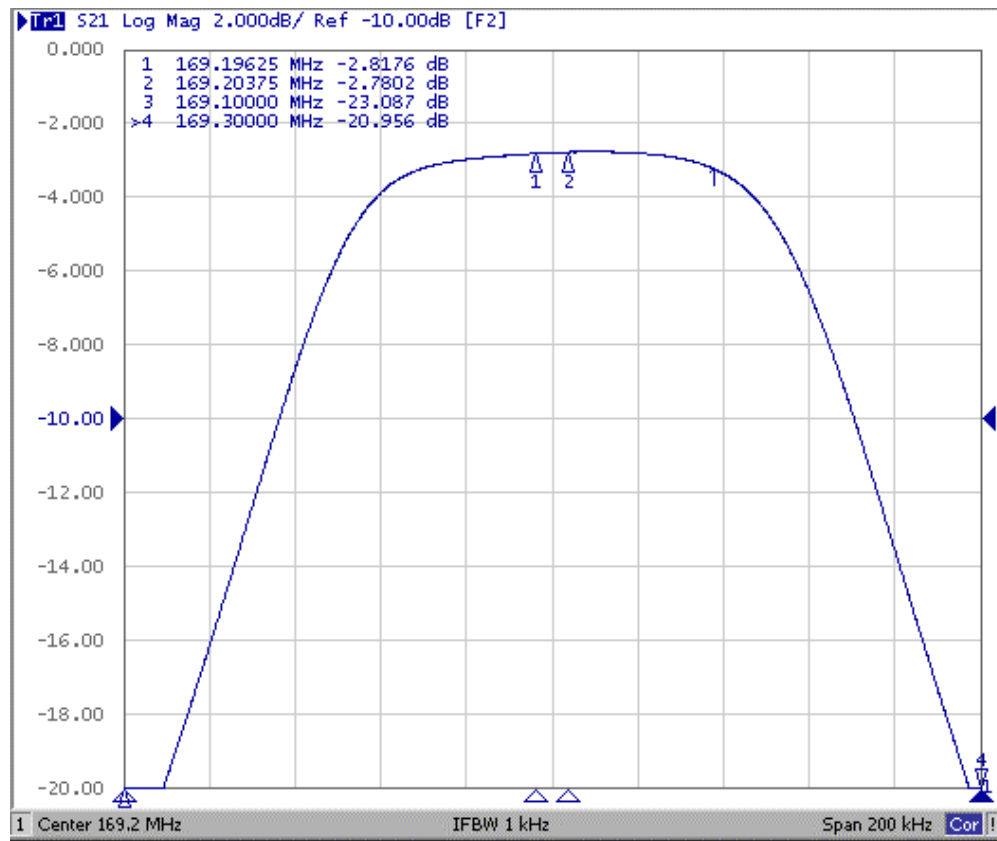


G. PACKING:

1. REEL DIMENSION

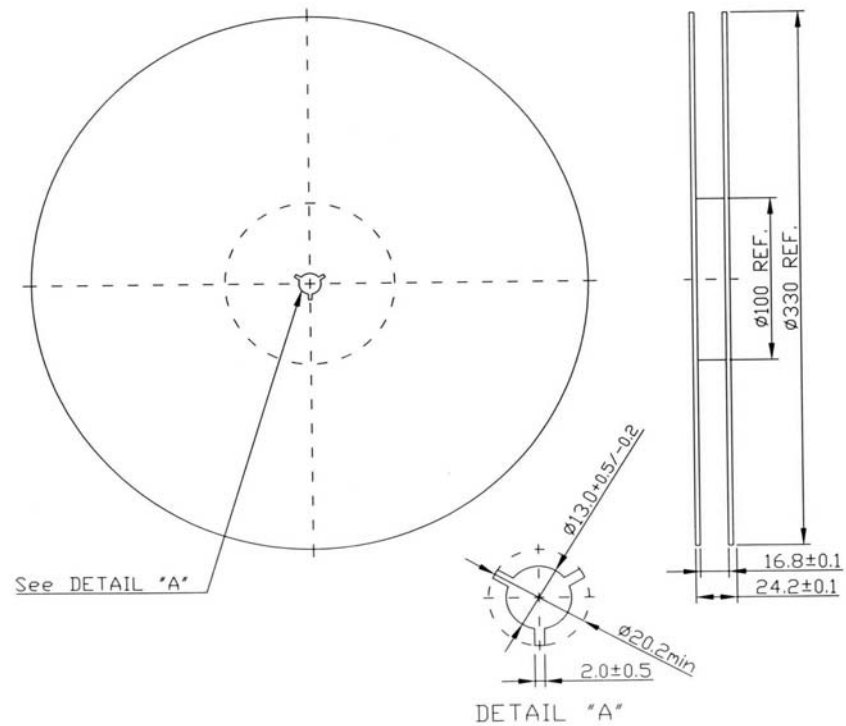

2. TAPE DIMENSION

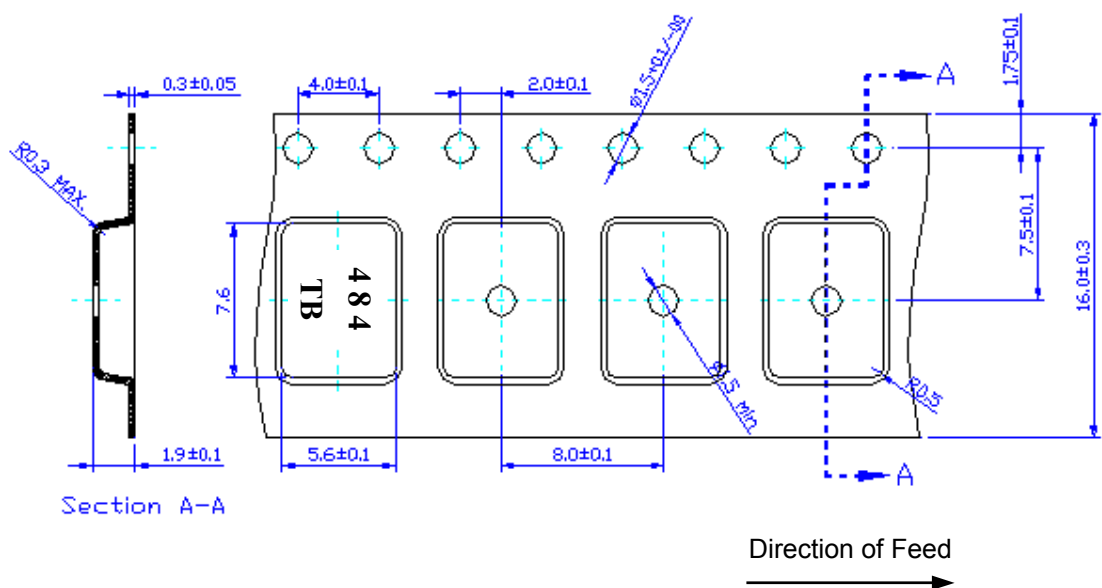

H. RECOMMENDED REFLOW PROFILE :

