



HIGH POWER BALUN (200 kHz to 10 GHz)

BALH-0010

Features

- 200 kHz to 10 GHz Balun (Balanced to Unbalanced Transformer)
- Better than 37 dBm 1-dB compression point
- Tuned for Optimal Phase/Amplitude Balance
- Applications: Analog to Digital Converters, Balanced Receivers, Baseband Digital Modulation, Signal Integrity
- [BALH-0010.s3p](#)



Electrical Specifications - Specifications guaranteed from -55 to +100°C, measured in a 50Ω system.


Parameter	Frequency Range	Min	Typ	Max
Insertion Loss (dB)	200 kHz to 10 GHz		5.5	7.5
Input 1 dB Compression (dBm) ¹		37		
Nominal Phase Shift (Degrees)			180	
Amplitude Balance (dB)			±0.2	±0.6
Phase Balance (Degrees)			±2	±6
Common Mode Rejection (dB)		25	35	
Isolation (dB)			8	
VSWR (Input)			1.5	
VSWR (Output)			1.75	
Risetime /Falltime (ps) ²			13	
Weight (g)			32	

¹Measured in a well-heat sunk environment.

²Specified as 90%/10%. Calculated from $\tau_{\text{balun}}^2 = (\tau_{\text{out}}^2 - \tau_{\text{in}}^2)$

Model Number	Description
BALH-0010	200 kHz to 10 GHz High Power Balun with SMA connectors ¹

¹Default is SMA female connectors. Consult factory for other connector options.

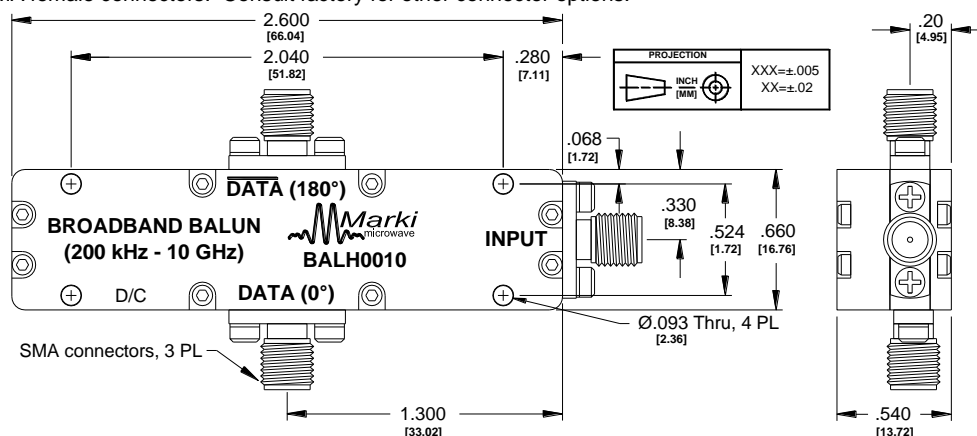


HIGH POWER BALUN (200 kHz to 10 GHz)

BALH-0010

Page 2

Block Diagram

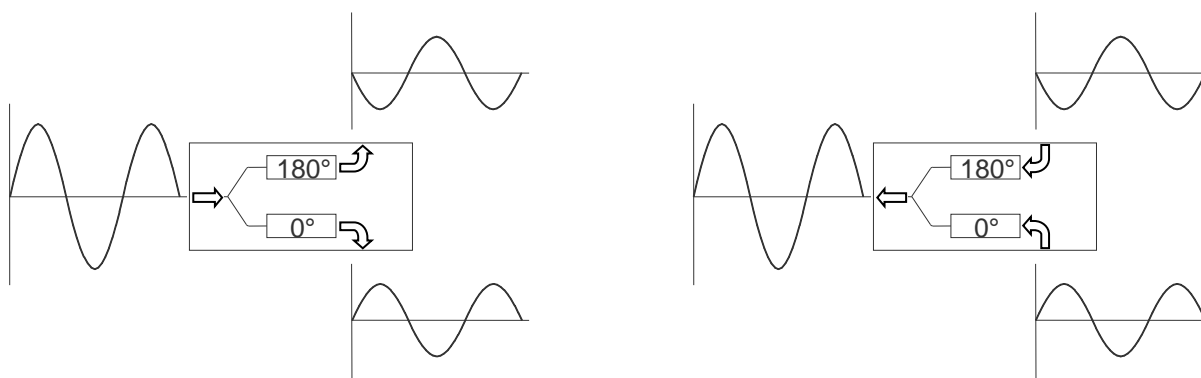

Single ended to differential

Differential to single ended

Typical Performance

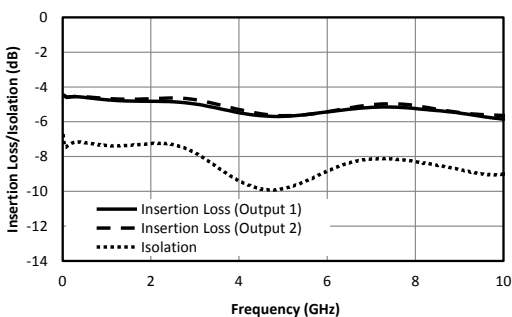


Fig. 1. Common to output port insertion loss and output to output port Isolation.

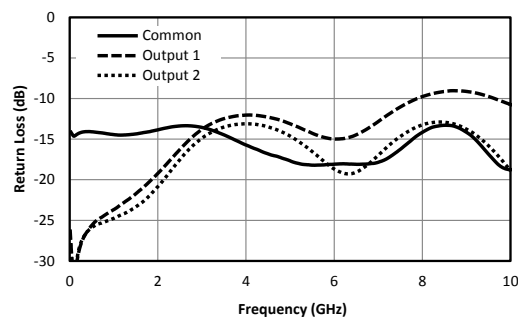


Fig. 2. Return loss for common port and output ports.

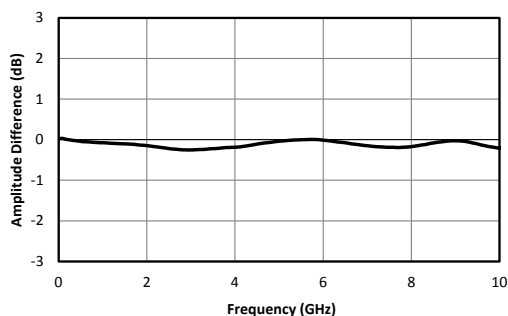


Fig. 3. Amplitude balance between output ports.

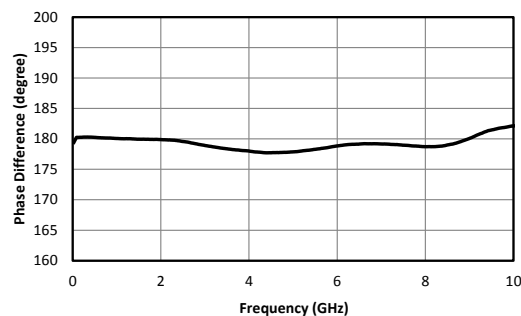


Fig. 4. Phase balance between output ports.

HIGH POWER BALUN (200 kHz to 10 GHz)

BALH-0010

Page 3

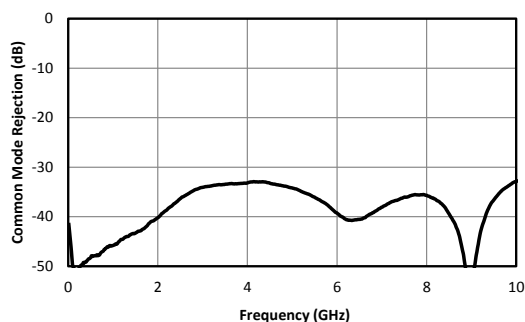


Fig. 5. Common mode rejection.

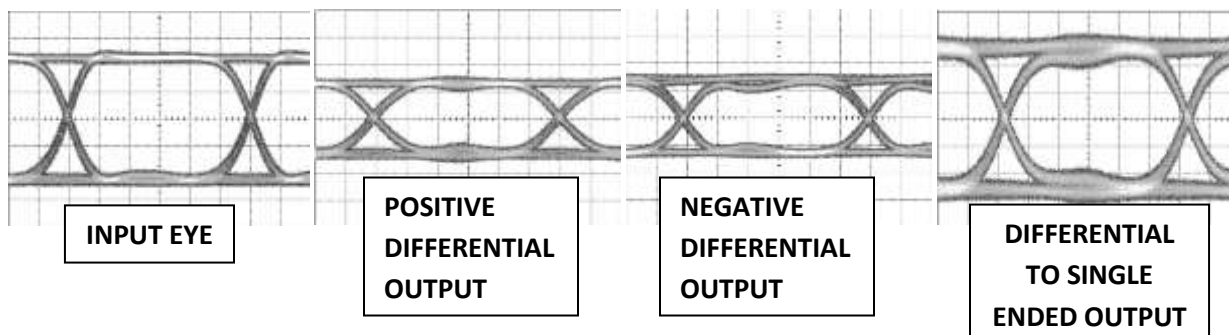


Fig. 6. Oscilloscope measurements of the BALH-0010 with a 10 Gb/s PRBS pattern. Eye diagrams are taken with a $2^{31}-1$ PRBS input demonstrating minimal eye distortion/closure afforded by the extremely low frequency operation of the balun (<200 kHz).

DC Interface

Port	Description	DC Interface Schematic
Common Port / In (Unbalanced)	The common port is DC short to ground.	Common Port (Unbalanced)
Out 1 / 0° Port (Balanced)	The 0° port is DC short to ground.	0° Port (Balanced)
Out 2 / 180° Port (Balanced)	The 180° port is DC short to ground.	180° Port (Balanced)

Marki Microwave reserves the right to make changes to the product(s) or information contained herein without notice. Marki Microwave makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Marki Microwave assume any liability whatsoever arising out of the use of or application of any product.