



WR-62 Standard Gain Horn Antenna Operates From 12.4 GHz
to 18 GHz With a Nominal 20 dB Gain WR-62 Input

TECHNICAL DATA SHEET

PE9854-20

Configuration

Design	WR-62 Standard Gain Horn
Frequency Range, GHz	12.4 to 18
Polarization	Linear
Interface 1	WR-62

Electrical Specifications

Nominal Gain, dB	20
------------------	----

Mechanical Specifications

Size

Length, in [mm]	5.8 [147.32]
Width, in [mm]	3 [76.2]
Height, in [mm]	2.239 [56.87]

Compliance Certifications (visit www.Pasternack.com for current document)

Not RoHS Compliant	
REACH Compliant	12/15/2010

Plotted and Other Data

2 Dimensional OML Drawing	PE9854-20
Notes:	
• Values at +25 °C, sea level	

WR-62 Standard Gain Horn Antenna Operates From 12.4 GHz to 18 GHz With a Nominal 20 dB Gain WR-62 Input from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.



Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [WR-62 Standard Gain Horn Antenna Operates From 12.4 GHz to 18 GHz With a Nominal 20 dB Gain WR-62 Input PE9854-20](#)

URL: <http://www.pasternack.com/standard-gain-horn-waveguide-size-wr62-pe9854-20-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE9854-20 CAD Drawing

WR-62 Standard Gain Horn Antenna Operates From 12.4 GHz
to 18 GHz With a Nominal 20 dB Gain WR-62 Input

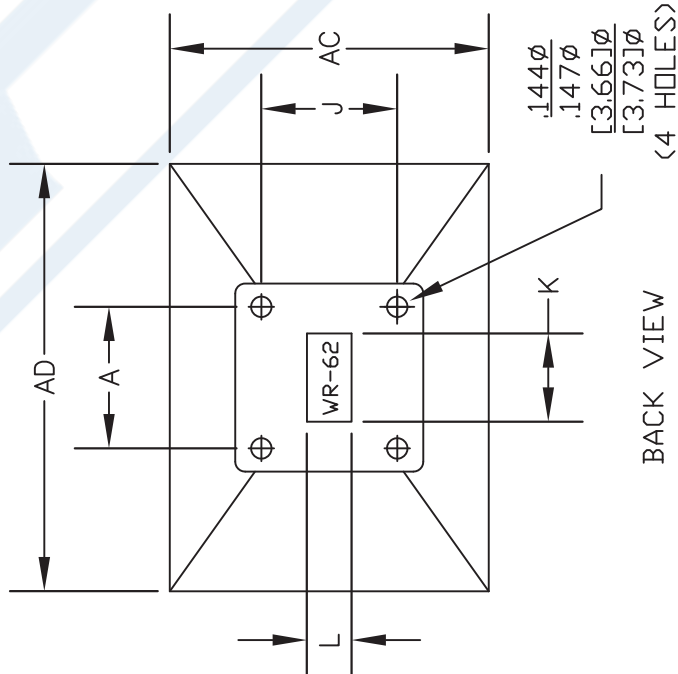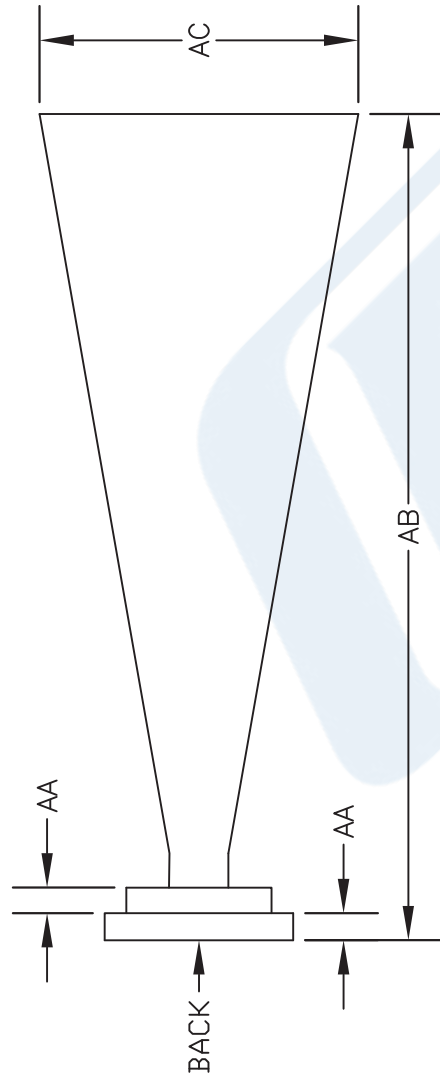

WR62	Dimension	Inches	mm
A		0.994	25.25
H		1.313	33.35
J		0.956	24.28
K (± 0.002)		0.622	15.80
L (± 0.002)		0.311	7.90

AA	0.190	4.83
AB	5.800	147.32
AC	2.239	56.87
AD	3.000	76.20

DWG TITLE

PE9854-20

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].

PASTERNAK ENTERPRISES, INC.

P.O. BOX 16759, IRVINE, CA 92623
PHONE (949) 261-1920 FAX (949) 261-7451

WEB ADDRESS: www.pasternack.com
E-MAIL ADDRESS: sales@pasternack.com

COAXIAL & FIBER OPTICS



REV. -

FSCM NO. 53919

CAD FILE 042607

SCALE N/A

SIZE A

127