



75 Ohm BNC Female Bulkhead Connector Crimp/
Solder Attachment For 735A, .480 inch D Hole

TECHNICAL DATA SHEET

PE44687

75 Ohm BNC Female Bulkhead Connector Crimp/Solder Attachment For 735A, .480 inch D Hole

Configuration

Connector	BNC Female
Connector Interface Type	735A
Cable Attachment Method (Shield/Contact)	Crimp/Solder
Body Style	Straight
Mount Method	Bulkhead

Electrical Specifications

Frequency Range, GHz	DC to 4
Impedance, Ohms	75
Maximum VSWR	1.3:1
Maximum Operating Voltage, Volts	335
Dielectric Withstanding Voltage, Vrms	750

Mechanical Specifications

Temperature

Operating Range, deg C	-65 to +165
------------------------	-------------

Size

Length, in [mm]	1.43 [36.32]
Width/Dia., in [mm]	0.63 [16.00]
Weight, lbs [g]	0.04 [18.14]

Connector

Type	BNC Female
Contact Material and Plating	Brass, Gold
Contact Plating Specification	30μ in. minimum
Body Material and Plating	Brass, Nickel
Body Plating Specification	100μ in. minimum
Dielectric Type	Teflon

Compliance Certifications (visit www.Pasternack.com for current document)

RoHS Compliant	Yes
----------------	-----

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [75 Ohm BNC Female Bulkhead Connector Crimp/Solder Attachment For 735A, .480 inch D Hole PE44687](#)

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.



75 Ohm BNC Female Bulkhead Connector Crimp/
Solder Attachment For 735A, .480 inch D Hole

TECHNICAL DATA SHEET

PE44687

Plotted and Other Data

Notes:

Values at 25 °C, sea level

75 Ohm BNC Female Bulkhead Connector Crimp/Solder Attachment For 735A, .480 inch D Hole from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [75 Ohm BNC Female Bulkhead Connector Crimp/Solder Attachment For 735A, .480 inch D Hole PE44687](http://www.pasternack.com/bnc-female-standard-735a-connector-pe44687-p.aspx)


URL: <http://www.pasternack.com/bnc-female-standard-735a-connector-pe44687-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.


PE44687 CAD Drawing

75 Ohm BNC Female Bulkhead Connector Crimp/Solder
Attachment For 735A, .480 inch D Hole


ASSEMBLY PROCEDURES

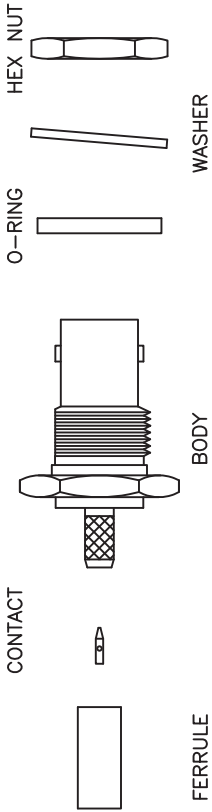




1. STRIP CABLE TO THE DIMENSIONS SHOWN.

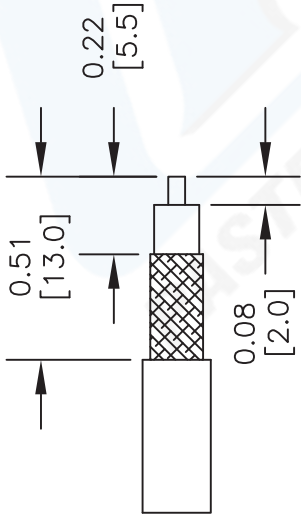

2. SOLDER CONTACT TO CENTER CONDUCTOR, THEN SLIDE FERRULE ONTO CABLE.

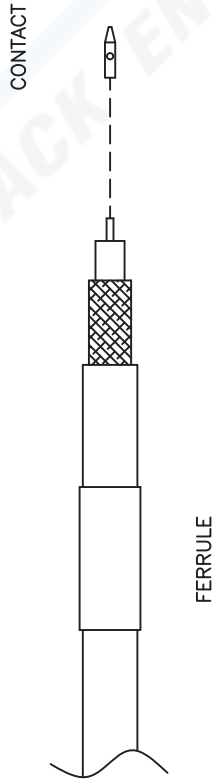

3. INSERT BODY INTO BRAID AND DIELECTRIC, SLIDE FERRULE OVER BRAID, CRIMP IT WITH .178" HEX CRIMP TOOL.

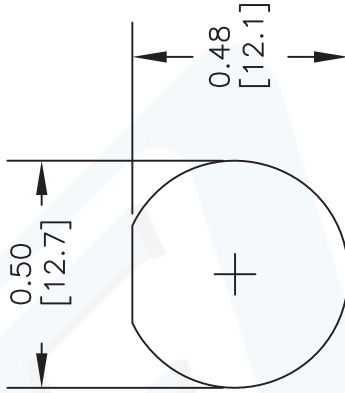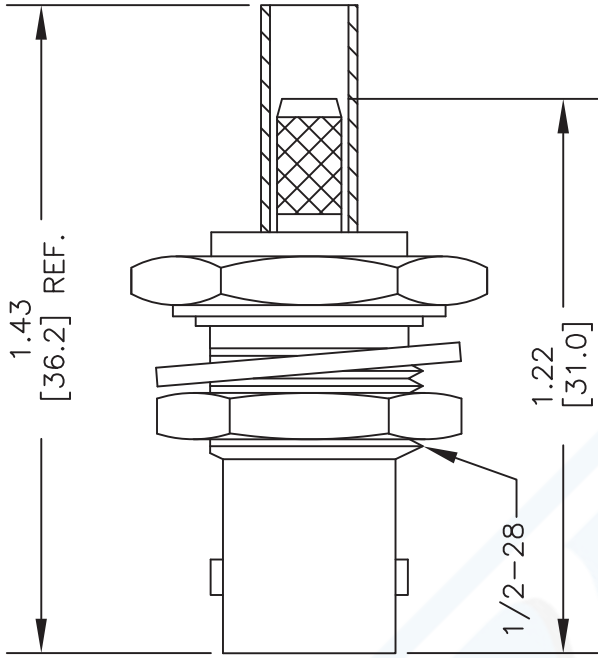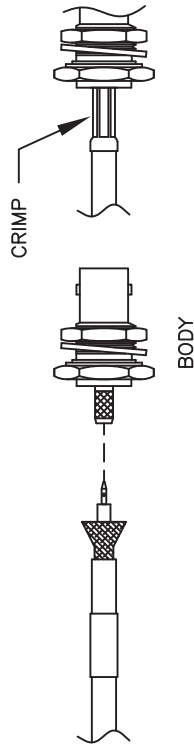

MOUNTING HOLE

DWG TITLE

PE44687

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].
4. FITS MIL-C-17 AND EQUIVALENT CABLES.

PE
PASTERNAK ENTERPRISES®
ESTABLISHED 1972

PASTERNAK ENTERPRISES, INC.
P.O. BOX 16759, IRVINE, CA 92623
PHONE (949) 261-1920 FAX (949) 261-7451
WEB ADDRESS: www.pasternack.com
E-MAIL ADDRESS: sales@pasternack.com
COAXIAL & FIBER OPTICS

REV. -

FSCM NO. 53919

CAD FILE 042412

SCALE N/A

SIZE A

2231