



5300 Beethoven Street, Los Angeles, CA 90066
 TEL: (310)306-5556 • FAX: (310)821-7413
 WEB: www.ophirrf.com • E-MAIL: sales@ophirrf.com

MODEL 5062-006

1 - 1000 MHz
100 WATTS
LINEAR POWER RF AMPLIFIER

Solid State Broadband High Power RF Amplifier

The 5062-006 is a 100 Watt broadband amplifier that covers the 1 – 1000 MHz frequency range. This small and lightweight amplifier utilizes Class A/AB linear power devices that provide an excellent 3rd order intercept point, high gain, and a wide dynamic range.

Due to robust engineering and employment of the most advanced devices and components, this amplifier achieves high efficiency operation with proven reliability. Like all OPHIR_{RF} amplifiers, the 5062-006 comes with an extended multiyear warranty.

	Parameter	Specification @ 25° C
Electrical		
1	Frequency Range	1 – 1000 MHz
2	Saturated Output Power	100 Watts typical
3	Power Output @ 1dB Comp.	70 Watts min
4	Small Signal Gain	+50 dB min
5	Gain Flatness / with ALC	$\pm 2.5 / \pm 0.75$ dB max
6	IP ₃	+54 dBm typical
7	Input VSWR	2:1 max
8	Harmonics	-20 dBc typical @ 70 Watts
9	Spurious Signals	< -60 dBc typical @ 70 Watts
10	Input/Output Impedance	50 Ohms nominal
11	AC Input Power	3000 Watts max
12	AC Input	200 – 240 VAC, single phase
13	RF Input	0 dBm
14	RF Input Signal Format	CW/AM/FM/PM/Pulse
15	Class of Operation	AB
Mechanical		
16	Dimensions	19" x 8.75" x 20"
17	Weight	80 lb. max 36 Kg max
18	Connectors	Type-N
19	Grounding	Chassis
20	Cooling	Internal Forced Air
Environmental		
21	Operating Temperature	0° C to +50° C
22	Operating Humidity	95% Non-condensing
23	Operating Altitude	Up to 10,000' Above Sea Level
24	Shock and Vibration	Normal Truck Transport

Specifications subject to change without notice.

CIRCUIT PROTECTIONS

- ◇ Thermal Overload
- ◇ Over Current
- ◇ Over Voltage

ORDERING MODELS

- ◇ RE – Rear RF Connector model with Front Panel Controller Ethernet, IEEE-488 and RS232
- ◇ FE – Front RF Connector model with Front Panel Controller Ethernet, IEEE-488 and RS232
- ◇ R – Rear RF Connector model
- ◇ F – Front RF Connector model




FE Model Shown



5300 Beethoven Street, Los Angeles, CA 90066
TEL: (310)306-5556 • FAX: (310)821-7413
WEB: www.ophirrf.com • E-MAIL: sales@ophirrf.com

MODEL 5062-006

1 - 1000 MHz
100 WATTS
LINEAR POWER RF AMPLIFIER

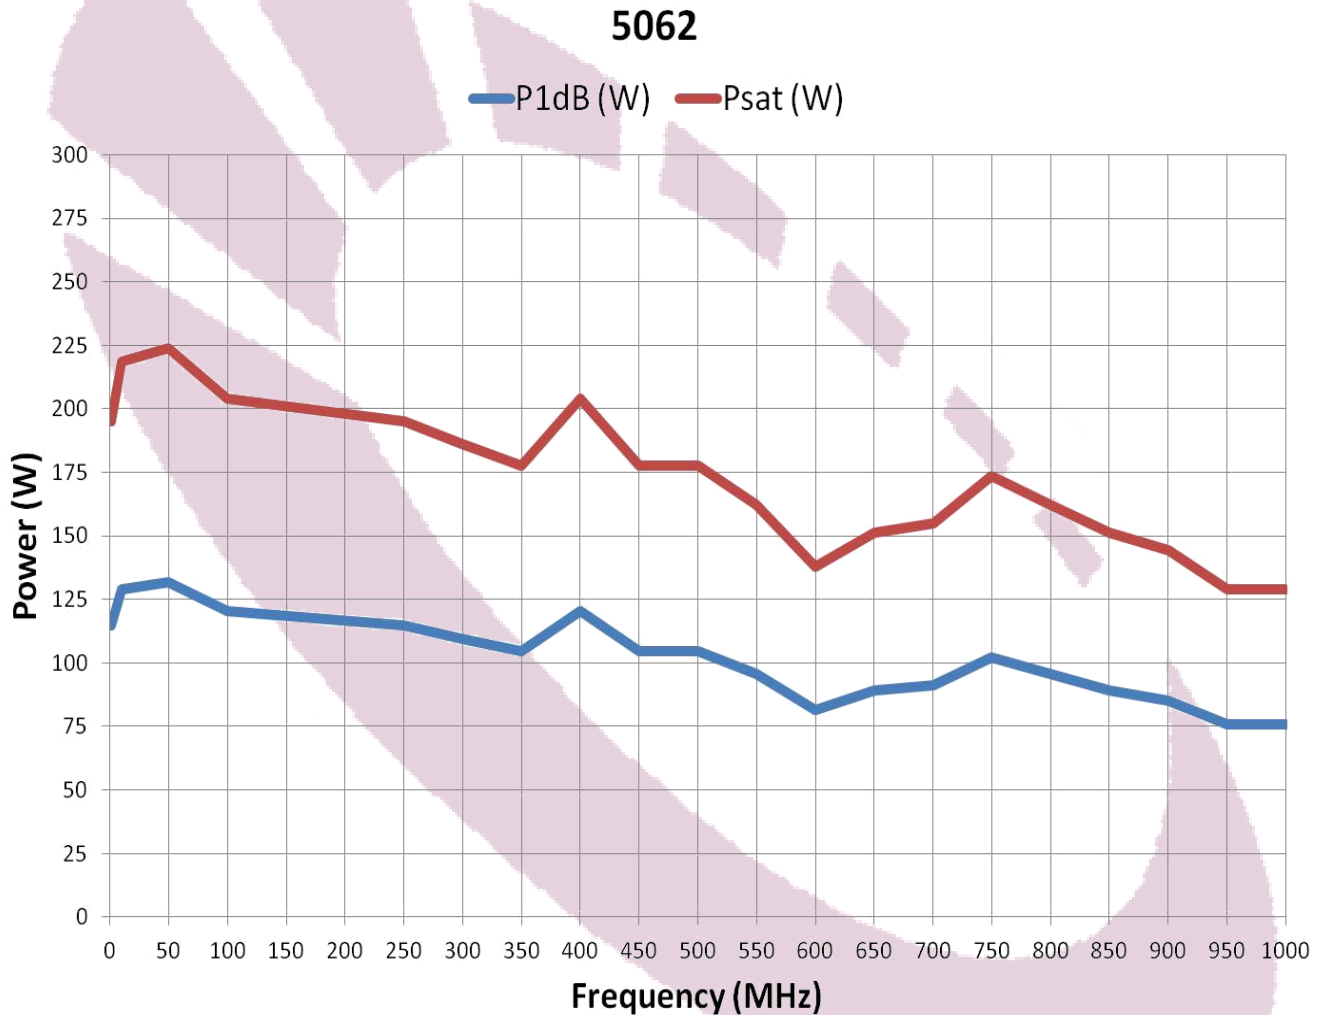

FRONT PANEL CONTROLLER FEATURES

- ◇ Forward Power Monitoring
- ◇ Reflected Power Monitoring
- ◇ Gain Control (Continuously Variable VVA 20dB)
- ◇ Fault Status
- ◇ Full Protection Of any VSWR Condition, Open or Short, into any Phase Angle
- ◇ Remote Control Access via the Ethernet, RS-232, or IEEE-488 Communications ports
- ◇ Integrated Automatic Leveling Control to allow end-user to maintain output even with variances in temperature, phase or input RF level
- ◇ Standby/Enable Control
- ◇ Front Panel Display for easy viewing of System Status Locally
- ◇ Keypad buttons for full local control