



50 Ohm SMA Mixer Operating From 2000 MHz To 8000 MHz With
an IF Range From 100 To 4000 MHz And LO Power of +10 dBm

TECHNICAL DATA SHEET

PE8651

50 Ohm SMA Mixer Operating From 2000 MHz To 8000 MHz With an IF Range From 100 To 4000 MHz And LO Power of +10 dBm

Configuration

Design	Double Balanced
RF Connector	SMA Female
RF Connector Impedance	50 Ohms
LO Connector	SMA Female
LO Connector Impedance	50 Ohms
IF Connector	SMA Female
IF Connector Impedance	50 Ohms

Electrical Specifications

RF Frequency Range, GHz	2 to 8
LO Frequency Range, GHz	2 to 8
IF Frequency Range, GHz	0.1 to 4
Maximum RF Connector Power, Watts	-10
Maximum LO Connector Power, Watts	10

Mechanical Specifications

Size

Length, in [mm]	1.55 [39.37]
Width/Dia., in [mm]	0.31 [7.87]
Height, in [mm]	0.965 [24.51]
Body Material and Plating	Passivated Stainless Steel

RF Connector

Type	SMA Female
Body Material and Plating	Passivated Stainless Steel

LO Connector

Type	SMA Female
Body Material and Plating	Passivated Stainless Steel

IF Connector

Type	SMA Female
Body Material and Plating	Passivated Stainless Steel

DC Bias Connector

Type

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [50 Ohm SMA Mixer Operating From 2000 MHz To 8000 MHz With an IF Range From 100 To 4000 MHz And LO Power of +10 dBm PE8651](#)

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.



50 Ohm SMA Mixer Operating From 2000 MHz To 8000 MHz With
an IF Range From 100 To 4000 MHz And LO Power of +10 dBm

TECHNICAL DATA SHEET

PE8651

Compliance Certifications (visit www.Pasternack.com for current document)

Plotted and Other Data

Notes:

Values at 25 °C, sea level

50 Ohm SMA Mixer Operating From 2000 MHz To 8000 MHz With an IF Range From 100 To 4000 MHz And LO Power of +10 dBm from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [50 Ohm SMA Mixer Operating From 2000 MHz To 8000 MHz With an IF Range From 100 To 4000 MHz And LO Power of +10 dBm PE8651](http://www.pasternack.com/sma-female-double-balanced-mixer-rf-20-80-ghz-pe8651-p.aspx)

URL: <http://www.pasternack.com/sma-female-double-balanced-mixer-rf-20-80-ghz-pe8651-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.

PE8651 CAD Drawing

50 Ohm SMA Mixer Operating From 2000 MHz To 8000 MHz With an
IF Range From 100 To 4000 MHz And LO Power of +10 dBm

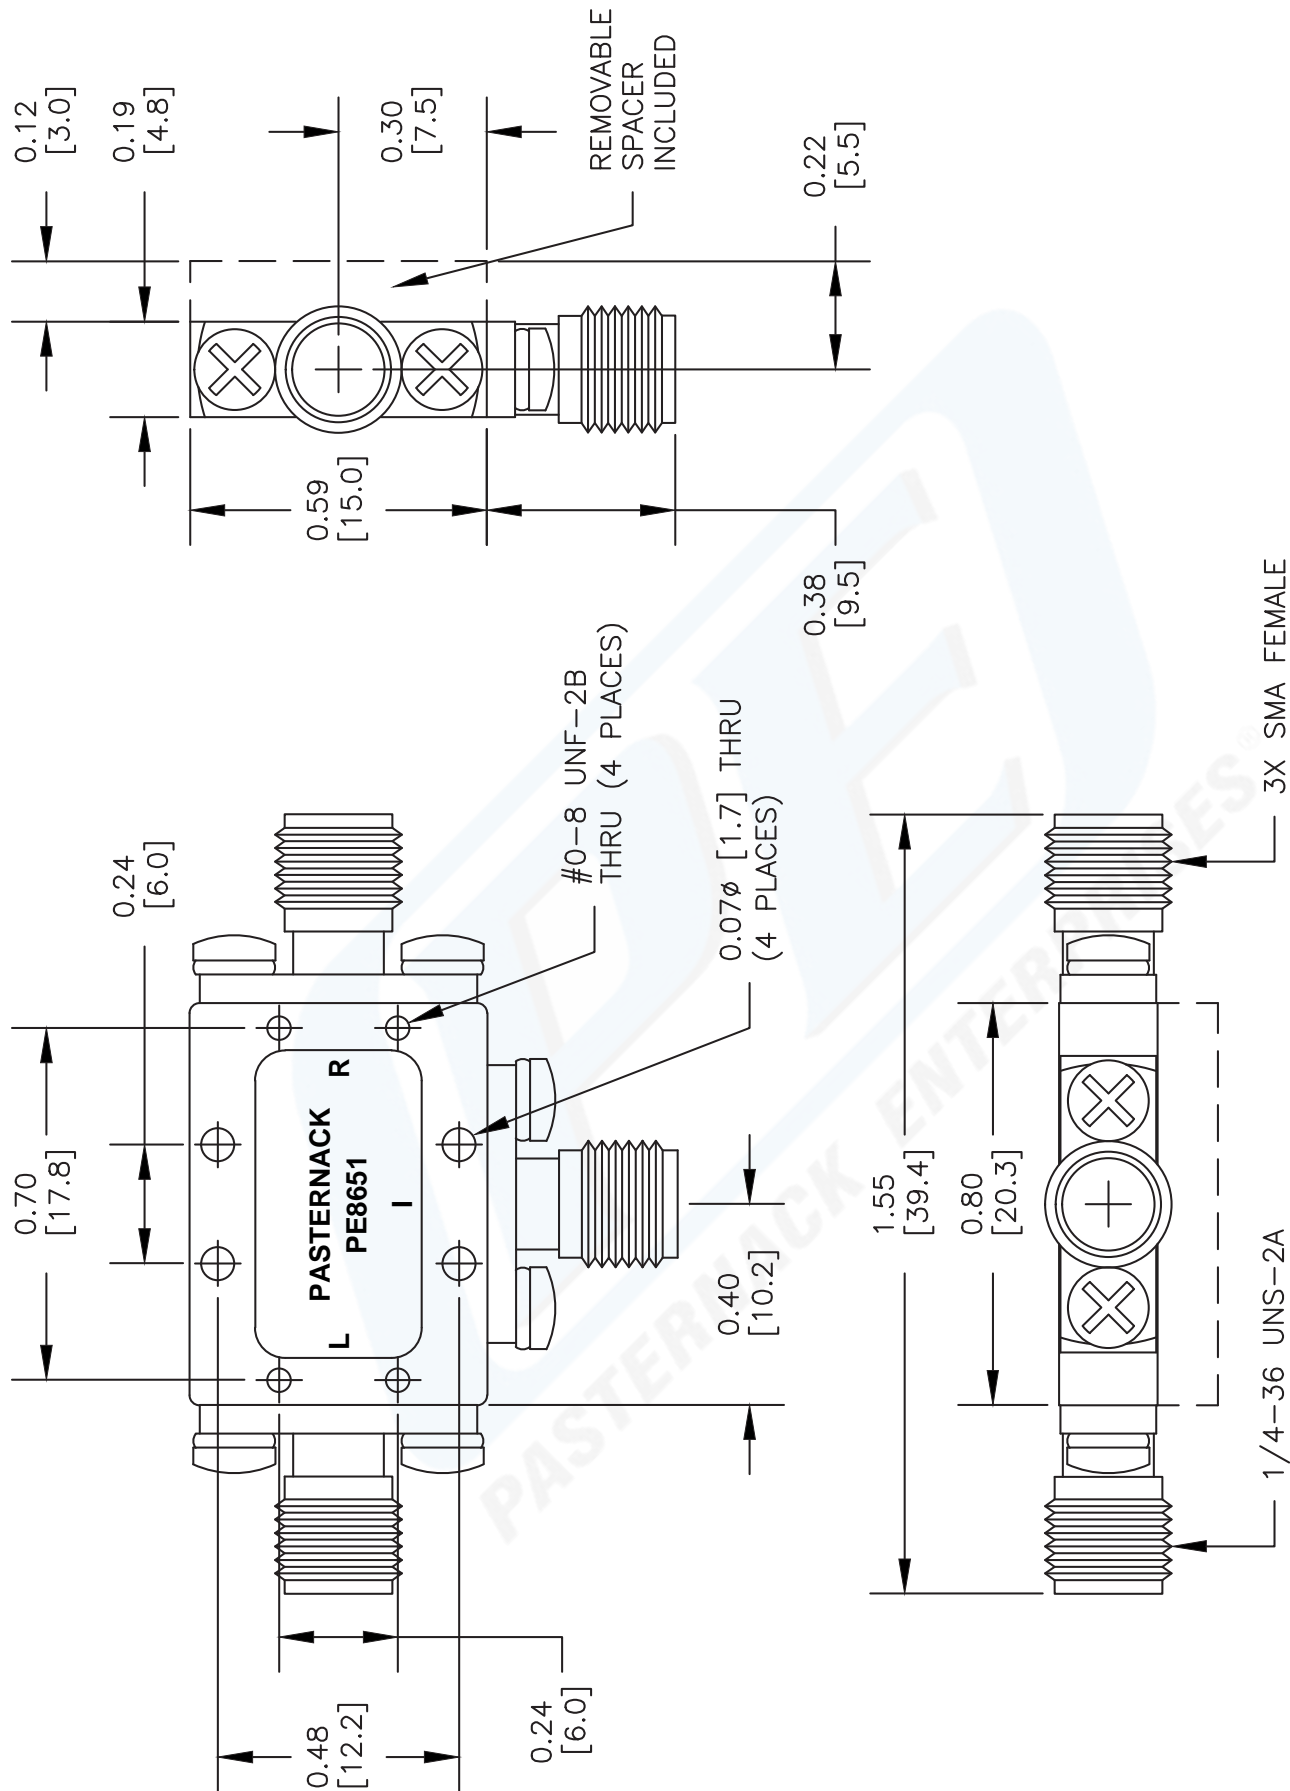

DWG TITLE

PE8651

NOTES:

1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].

PE PASTERNAK®
Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | Fax: (949) 261-7451
Website: www.pasternack.com | E-Mail: sales@pasternack.com

FSCM NO. 53919

CAD FILE 120611

SCALE N/A

SIZE A

2233