



5200 Beethoven Street, Los Angeles, CA 90066

TEL: (310)306-5556 • FAX: (310)821-7413

WEB: www.ophirrf.com • E-MAIL: sales@ophirrf.com

MODEL 5291

6.0-12.0 GHz

30 WATTS

LINEAR POWER RF AMPLIFIER


Solid State Broadband High Power RF Amplifier

The 5291 is a 30 Watt broadband amplifier that covers the 6.0-12.0 GHz frequency range. This amplifier utilizes Class A/AB linear power devices that provide an excellent 3rd order intercept point, high gain, and a wide dynamic range.

Due to robust engineering and employment of the most advanced devices and components, this amplifier achieves high efficiency operation with proven reliability. Like all OPHIR_{RF} amplifiers, the 5291 comes with an extended multiyear warranty backed by Ophir RF's commitment to total customer satisfaction.

	Parameter	Specification @ 25° C
Electrical		
1	Frequency Range	6.0-12.0 GHz
2	Saturated Output Power	30 Watts Typical
3	Small Signal Gain	+44 dB Minimum
4	Gain Flatness	± 3.5 dB Maximum
5	IP ₃	+47 dBm typical
6	Input VSWR	2:1 max
7	Harmonics	-20 dBc min @ 10 Watts
8	Spurious Signals	< -60 dBc typical @ 10 Watts
9	Input/Output Impedance	50 Ohms nominal
10	AC Input Power	800 Watts Maximum
11	AC Input	230VAC, 50 Hz, single phase
12	RF Input	0 dBm Nominal
13	RF Input Signal Format	CW/AM/FM/PM/Pulse
14	Class of Operation	Class A/AB
Mechanical		
15	Dimensions	19" x 5.25" x 24"
16	Weight	60 lb. max
17	RF Connectors	Type-N
18	Grounding	Chassis
19	Cooling	Internal Forced Air
Environmental		
20	Operating Temperature	0° C to +50° C
21	Operating Humidity	95% Non-condensing
22	Operating Altitude	Up to 10,000' Above Sea Level
23	Shock and Vibration	Normal Truck Transport


Specifications subject to change without notice

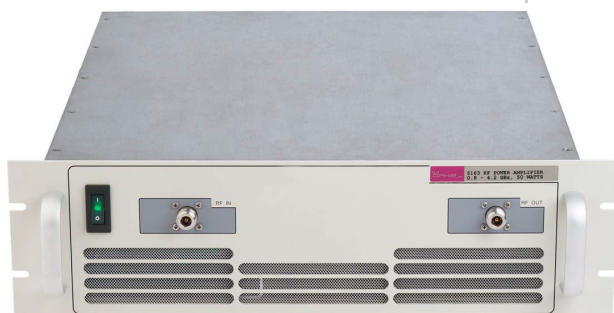

F MODEL SHOWN

ORDERING MODELS

- ◇ R _ Rear RF Connector model
- ◇ F _ Front RF Connector model

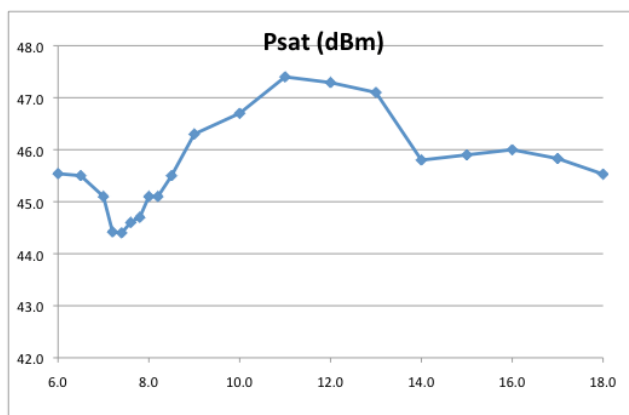

Approved By: _____ Date: _____