

DEVICE SPECIFICATIONS

Phase Matrix PXI-1470

26.5 GHz PXI Vector Signal Analyzer

This document lists specifications for the Phase Matrix PXI-1470 26.5 GHz vector signal analyzer (VSA).

The PXI-1470 26.5 GHz VSA comprises the following modules:

- PXI-1410 preselector
- PXI-1420 microwave (MW) downconverter
- PXI-1430C RF downconverter
- PXI-1450B local oscillator
- NI PXIe-5622 high-speed digitizer



Note There is no physical device named PXI-1470.

Phase Matrix warrants the PXI-1470 to meet its published specifications if the individual modules are calibrated and operating within specifications.

Specifications are warranted under the following conditions, unless otherwise noted:

- 20 minutes warm-up time.
- Calibration cycle is maintained.
- Chassis fan speed is set to High. In addition, Phase Matrix recommends using slot blockers and EMC filler panels in empty module slots to minimize temperature drift.
- NI-RFSA 2.9 instrument driver is used.
- Operating systems: Windows 8.1/8/7/Vista with all available critical updates and service packs
- Processor speed: Intel i5 or equivalent
- Modules are connected with NI cables as shown in the *Phase Matrix PXI-1470 Getting Started Guide*.

Specifications describe the warranted, traceable product performance over ambient temperature ranges of 0 °C to 55 °C, unless otherwise noted.

Typical values describe useful product performance beyond specifications that are not covered by warranty and do not include guardbands for measurement uncertainty or drift. Typical values may not be verified on all units shipped from the factory. Unless otherwise noted, typical values cover the expected performance of units over ambient temperature ranges of 23 °C ±5 °C with a 90% confidence level, based on measurements taken during development or production.

Nominal values (or supplemental information) describe additional information about the product that may be useful, including expected performance that is not covered under *Specifications* or *Typical* values. Nominal values are not covered by warranty.

Specifications are subject to change without notice. For the most recent device specifications, visit ni.com/manuals.



Caution Refer to the *Read Me First: Safety and Electromagnetic Compatibility* document for important safety and electromagnetic compatibility information. To obtain a copy of this document online, visit ni.com/manuals and search for the document title.



Caution To ensure the specified EMC performance, operate this product only with shielded cables and accessories.

Frequency

Frequency range..... 50 MHz to 26.5 GHz

Analysis Bandwidth¹

Maximum analysis bandwidth (3 dB, typical)

50 MHz to <250 MHz..... 10 MHz

250 MHz to 26.5 GHz..... 50 MHz

>2.85 GHz with preselector yttrium-iron
garnet tunable filter (YTF) enabled 40 MHz

Streamed Analog Bandwidth

Maximum streamed analog bandwidth (3 dB, typical)

50 MHz to <250 MHz..... 10 MHz

250 MHz to 26.5 GHz..... 50 MHz

>2.85 GHz with preselector
YTF enabled 40 MHz

Resolution Bandwidth

Minimum 100 Hz

Maximum..... 50 MHz (refer to *Analysis Bandwidth*)

¹ Instantaneous, single-shot capture bandwidth where no LO tuning and/or tiling is required.

Frequency Reference

Internal Frequency Reference

REF OUT frequency.....	10 MHz, nominal
Amplitude.....	0 dBm \pm 3 dB, nominal
Aging.....	\pm 1.0 ppm/year after 30 days of operation
Temperature stability.....	\pm 0.5 ppm
Impedance.....	50 Ω , nominal
REF OUT connector.....	SMB (f)

External Frequency Reference Input

REF IN lock frequency range.....	10 MHz \pm 2 ppm
REF IN level range.....	0 dBm \pm 4 dBm, nominal
Impedance.....	50 Ω , nominal
REF IN connector.....	SMB (f)

Frequency Span

Minimum frequency span.....	7.325 kHz
Maximum frequency span.....	Full span

Amplitude


Amplitude Range

Amplitude range.....	+30 dBm to noise floor (DANL)
Maximum safe input level (at RF IN).....	+30 dBm (1 W)
RF IN attenuator range.....	0 dB to 70 dB in 10 dB steps, mechanical type

Absolute Amplitude Accuracy

Absolute amplitude accuracy at -20 dBm RF IN (preselector YTF disabled)	
Uncorrected (BW <10 MHz)	
50 MHz to 2.85 GHz.....	\pm 2 dB
>2.85 GHz to 26.5 GHz.....	\pm 2.5 dB
Absolute amplitude accuracy at -20 dBm RF IN (preselector YTF enabled, RF IN >2.85 GHz)	
Uncorrected.....	\pm 3 dB, typical

Figure 1. Frequency Response, Uncorrected, Preselector YTF Disabled

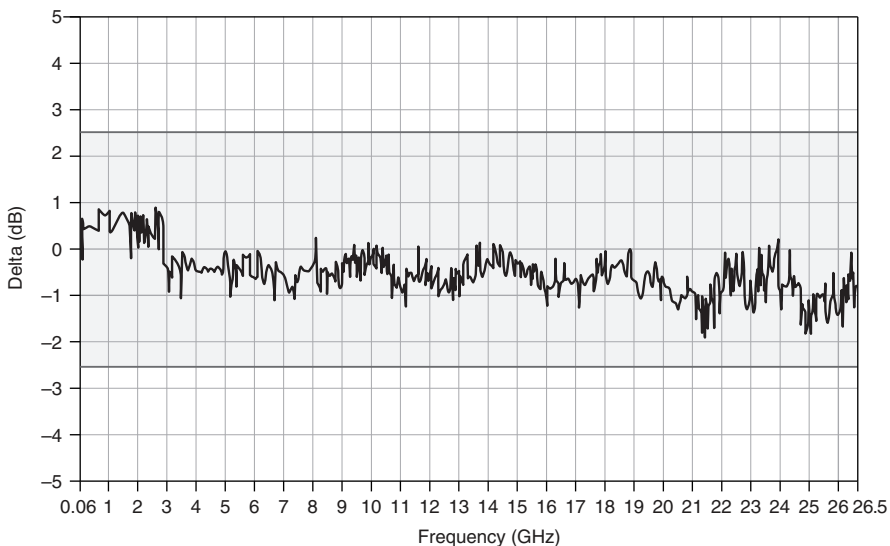

Displayed Average Noise Level (DANL)

Preselector YTF disabled

50 MHz to 8.8125 GHz.....-158 dBm/Hz

>8.8125 GHz to 26.5 GHz.....-147 dBm/Hz

Preselector YTF enabled


2.85 GHz to 8.8125 GHz-146 dBm/Hz

>8.8125 GHz to 26.5 GHz.....-142 dBm/Hz

Phase Noise

Phase noise (at 10 GHz, 10 kHz)..... -115 dBc/Hz, nominal

Figure 2. Residual Local Oscillator Phase Noise, Nominal (Phase Noise Only)

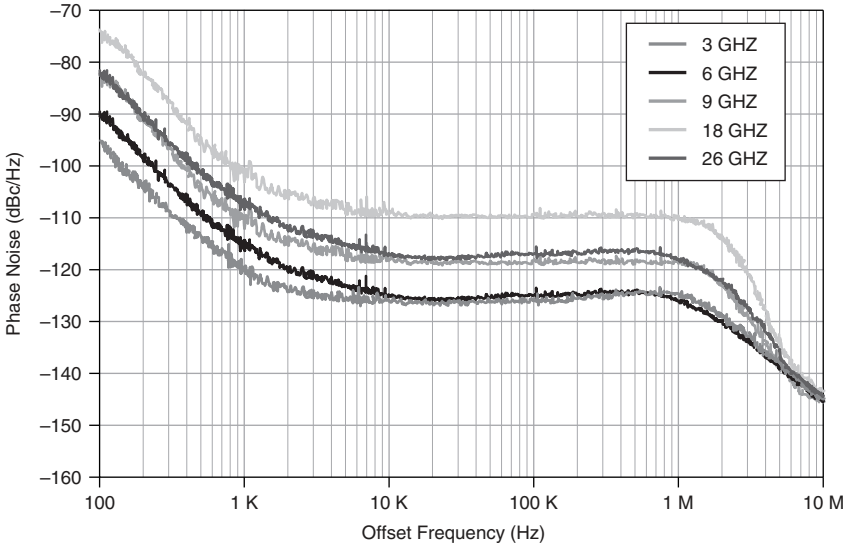

Spurious Responses

Residuals/Images/Spurious Responses

Residuals (input terminated, 0 dB step attenuation) -100 dBm maximum

Input-related spurious 50 MHz to 2.85 GHz

<100 kHz offset from carrier <-70 dBc, typical

<10 MHz offset from carrier <-60 dBc, typical

Input-related spurious >2.85 GHz to 26.5 GHz

<100 kHz offset from carrier <-63 dBc, typical

<10 MHz offset from carrier <-60 dBc, typical

Input-related image spurious

≤2.85 GHz <-60 dBc, typical

>2.85 GHz <-70 dBc, typical

Local oscillator leakage to RF IN port

- <2.85 GHz.....<-60 dBm, typical
- >2.85 GHz preselector YTF disabled<-60 dBm, typical
- >2.85 GHz preselector YTF enabled<-80 dBm, typical

IIP3¹-10 dBm, minimum

Figure 3. Dynamic Range 50 MHz to 2.85 GHz (PXI-1430C Related)


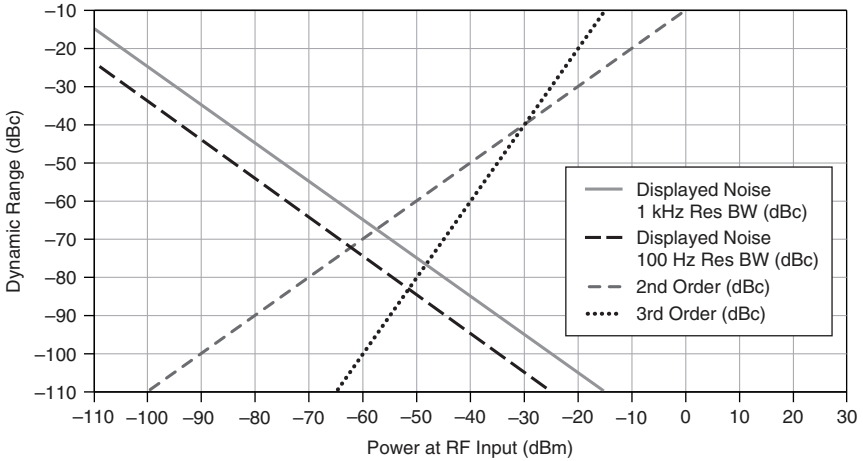


Figure 4. Dynamic Range 2.85 to 26.5 GHz (PXI-1420B Related)

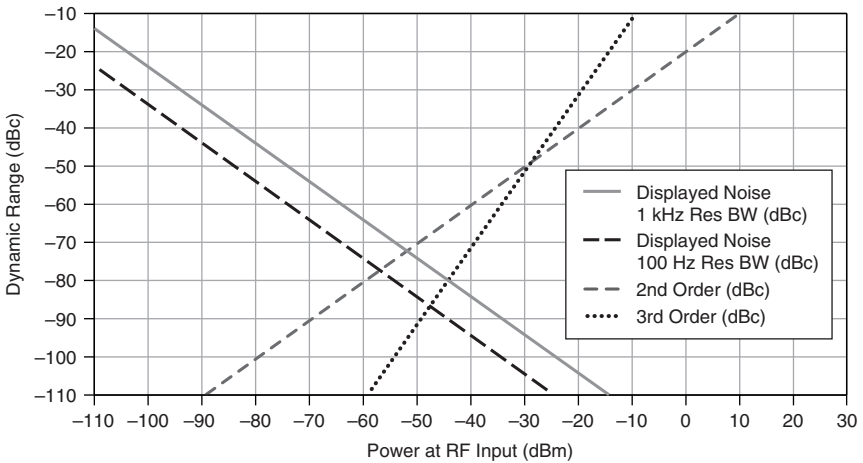

¹ Two -40 dBm RF input tones, spaced 10 MHz apart, referenced to RF IN on the PXI-1410A preselector module.

Modulation

Measurement Accuracy


Supported standards with NI-RFSA and

WLAN Analysis software WLAN 802.11a/b/g/j/p, WCDMA, 3 GPP/LTE, GSM/EDGE

Residual EVM <-40 dB (1%) at 50 MHz bandwidth, maximum; -20 dBm to +5 dBm RF IN; 2.4 GHz/5.8 GHz, 64 QAM (WLAN 802.11g), nominal

Measurement Speed

Figure 5. PXI-1470 Measurement Time vs. Span¹

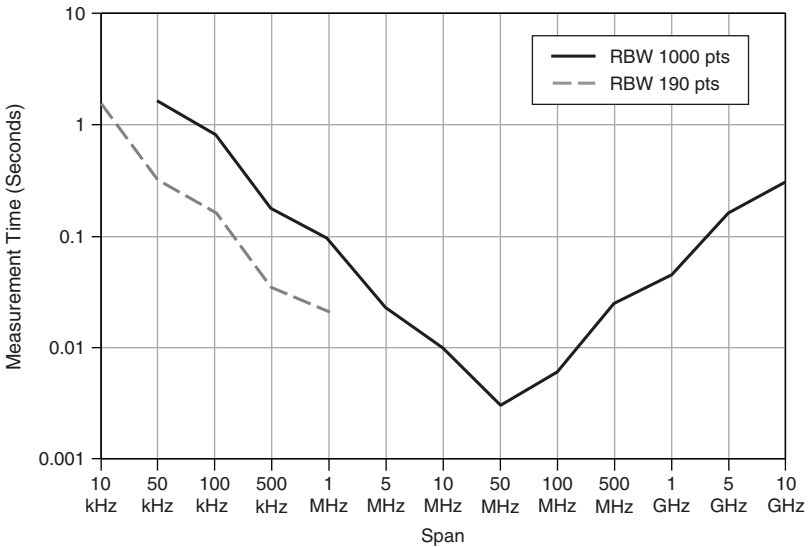

Center frequency tune and transfer..... 8 ms, nominal

¹ Analysis time versus span was measured with tuned frequencies greater than 100 MHz and 1,000 frequency points. For spans <1 MHz, both 1,000 and 190 frequency points are shown. Analysis time includes acquisition, FFT analysis, and data transfer time. For spans >50 MHz, analysis time includes tuning time with the preselector YTF disabled. This measurement was taken using an Intel® Core™ Duo processor-based PC at 3.06 GHz.

Time and Triggering

Internal storage¹ 256 MB
Sweep trigger modes Disable, software edge, digital edge, and I/Q power edge

Input and Output Characteristics

RF IN Front Panel Connector

Connector SMA (f), 27 GHz type
Impedance 50 Ω, nominal
Coupling A/C ± 5 VDC, maximum
Maximum safe input level (at RF IN) +30 dBm (1 W)

Input Voltage Standing Wave Ratio (VSWR)

VSWR (≥10 dB input attenuation)
50 MHz to 2.85 GHz 1.4:1 -16 dB return loss max
>2.85 GHz to 26.5 GHz 2.0:1 -10 dB return loss max

Power Requirements

Table 1. Power Requirements (Voltages ±5%)

Module	From +3.3 VDC	From +5 VDC	From +12 VDC	From -12 VDC	Total Power
PXI-1410	0.1 A	0.6 A	1.3 A	0.5 A	25 W max
PXI-1420	0.1 A	0.1 A	0.9 A	0.1 A	11 W max
PXI-1430C	0.1 A	0.5 A	1.1 A	0.0 A	16 W max
PXI-1450B	0.5 A	0.5 A	0.8 A	0.1 A	16 W max
NI PXIe-5622	1.75 A	0.0 A	2.25 A	0.0 A	33 W max


Calibration

Calibration interval 1 year

¹ You can stream data at full rate to the host PC to allow for acquisitions much larger than the internal 256 MB storage limit.

Physical Characteristics

Figure 6. PXI-1470 26.5 GHz VSA System Front Panel

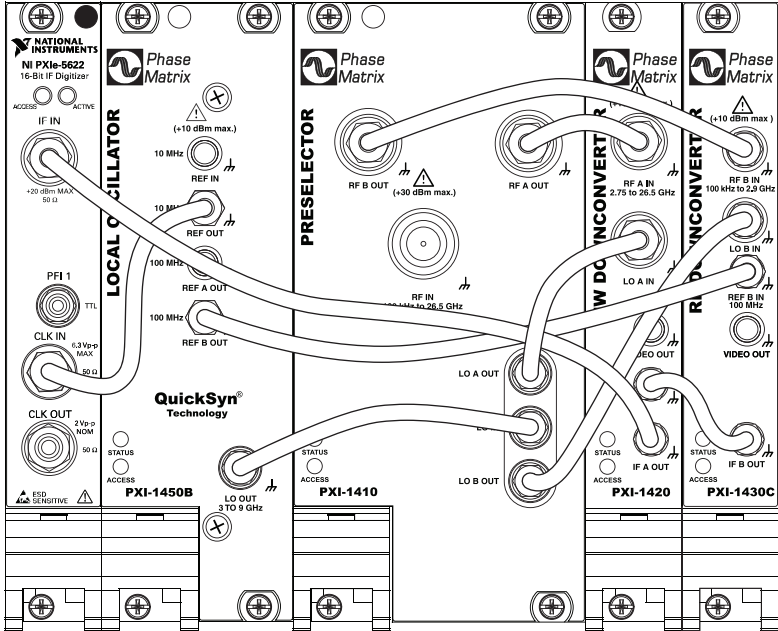

Physical Dimensions

PXI-1410

Size 3U, three slot, PXI/cPCI module,
21.6 cm × 6.0 cm × 13.0 cm,
(8.5 in. × 2.4 in. × 5.1 in.)

Weight..... 1.6 kg (3.5 lb)

PXI-1420

Size 3U, one slot, PXI/cPCI module,
21.6 cm × 2.0 cm × 13.0 cm,
(8.5 in. × 0.8 in. × 5.1 in.)

Weight..... 0.5 kg (1.1 lb)

PXI-1430C

Size 3U, one slot, PXI/cPCI module,
21.6 cm × 2.0 cm × 13.0 cm,
(8.5 in. × 0.8 in. × 5.1 in.)

Weight..... 0.5 kg (1.1 lb)

PXI-1450B

Size.....3U, two slot, PXI/cPCI module,
21.6 cm × 4.0 cm × 13.0 cm,
(8.5 in. × 1.6 in. × 5.1 in.)

Weight.....0.9 kg (2 lb)

NI PXIe-5622

Size.....3U, one slot, PXIe/cPCI module,
21.6 × 2.0 × 13.0 cm,
(8.5 in. × 0.8 in. × 5.1 in.)

Weight.....0.4 kg (0.9 lb)

Combined Unit

Size.....21.6 × 16.0 × 13.0 cm, (8.5 × 6.4 × 5.1 in.)

Weight.....3.9 kg (8.6 lb)

Environment

Maximum Altitude.....2,000 m (at 25 °C ambient temperature)

Pollution Degree2

Indoor use only.

Operating Environment

Ambient temperature range0 °C to 55 °C

Relative humidity range.....10% to 90%, noncondensing

Storage Environment

Ambient temperature range-40 °C to 70 °C

Relative humidity range.....5% to 95%, noncondensing

Compliance and Certifications

Safety

This product is designed to meet the requirements of the following electrical equipment safety standards for measurement, control, and laboratory use:

- IEC 61010-1, EN 61010-1

Electromagnetic Compatibility

This product meets the requirements of the following EMC standards for electrical equipment for measurement, control, and laboratory use:

- EN 61326-1 (IEC 61326-1): Class A emissions; Basic immunity
- EN 55011 (CISPR 11): Group 1, Class A emissions



Note For EMC declarations and certifications, refer to the *Online Product Certification* section.

CE Compliance

This product meets the essential requirements of applicable European Directives, as amended for CE marking, as follows:

- 2006/95/EC; Low-Voltage Directive (safety)
- 2004/108/EC; Electromagnetic Compatibility Directive (EMC)

Online Product Certification

To obtain product certifications and the DoC for this product, visit ni.com/certification, search by model number or product line, and click the appropriate link in the Certification column.

Environmental Management

NI is committed to designing and manufacturing products in an environmentally responsible manner. NI recognizes that eliminating certain hazardous substances from our products is beneficial to the environment and to NI customers.

For additional environmental information, refer to the *Minimize Our Environmental Impact* web page at ni.com/environment. This page contains the environmental regulations and directives with which NI complies, as well as other environmental information not included in this document.

Waste Electrical and Electronic Equipment (WEEE)



EU Customers At the end of the product life cycle, all products *must* be sent to a WEEE recycling center. For more information about WEEE recycling centers, National Instruments WEEE initiatives, and compliance with WEEE Directive 2002/96/EC on Waste and Electronic Equipment, visit ni.com/environment/weee.

电子信息产品污染控制管理办法（中国 RoHS）



中国客户 National Instruments 符合中国电子信息产品中限制使用某些有害物质指令 (RoHS)。关于 National Instruments 中国 RoHS 合规性信息，请登录 ni.com/environment/rohs_china。(For information about China RoHS compliance, go to ni.com/environment/rohs_china.)

Battery Replacement and Disposal



Battery Directive This device contains a long-life coin cell battery. If you need to replace it, use the Return Material Authorization (RMA) process or contact an authorized National Instruments service representative. For more information about compliance with the EU Battery Directive 2006/66/EC about Batteries and Accumulators and Waste Batteries and Accumulators, visit ni.com/environment/batterydirective.

Phase Matrix, Inc. designs and manufactures RF and microwave test-and-measurement (T&M) instruments, subsystems, and components and is a wholly owned subsidiary of National Instruments. Our array of instruments includes traditional benchtop frequency counters, modular (VXI) pulsed-frequency counters, modular (VXI and PXI) synthetic instruments, including downconverters, upconverters/synthesizers and local oscillators that are designed for both commercial and military applications. In addition, we produce instrument-grade, fast-switching synthesizer modules that can be used in various instruments or subsystems. We also manufacture a line of narrowband and broadband microwave components, ranging from VCOs to complex custom-built assemblies for military instrumentation and telecommunications applications.

The Phase Matrix logo is a registered trademark of Phase Matrix, Inc., a National Instruments Company. Refer to the *NI Trademarks and Logo Guidelines* at ni.com/trademarks for more information on National Instruments trademarks. Other product and company names mentioned herein are trademarks or trade names of their respective companies. For patents covering National Instruments products/technology, refer to the appropriate location: **Help»Patents** in your software, or the *National Instruments Patents Notice* at ni.com/patents. You can find information about end-user license agreements (EULAs) and third-party legal notices in the readme file for your product. Refer to the *Export Compliance Information* at ni.com/legal/export-compliance for the National Instruments global trade compliance policy and how to obtain relevant HTS codes, ECCNs, and other import/export data. Refer to *Export Compliance* at phasematrix.net/phasematrix/legal-information/export-compliance for the Phase Matrix global trade compliance policy.

© 2014 Phase Matrix, Inc. All rights reserved.