



ANATECH ELECTRONICS, INC.

Manufacturer of RF & Microwave Products




160 MHz Bandpass Filter

Part Number: AE160B6208

Center Frequency (Fo):	160 MHz
3dB Bandwidth:	>16 MHz
VSWR:	1.5dB
Insertion Loss:	<2 dB
Rejection @ 112 MHz	50dB
Rejection @ 208 MHz	50dB
Power Handling:	20 Watts
Operating Temperature:	-40 to +85 deg. C
Dimensions:	1.5 x 0.75 x 0.5 inches

Outline Drawing:

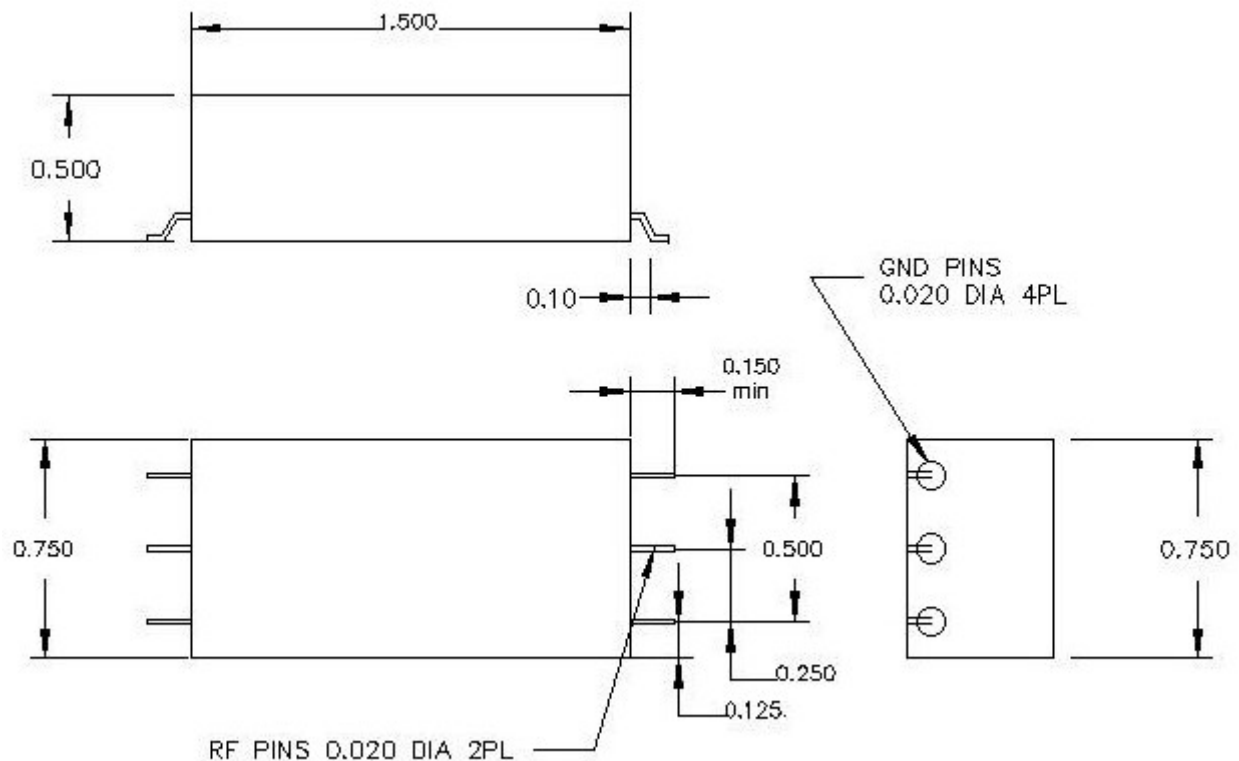



ANATECH ELECTRONICS, INC.


Manufacturer of RF & Microwave Products



160 MHz Bandpass Filter

Part Number: AE160B6208

Response Plot:

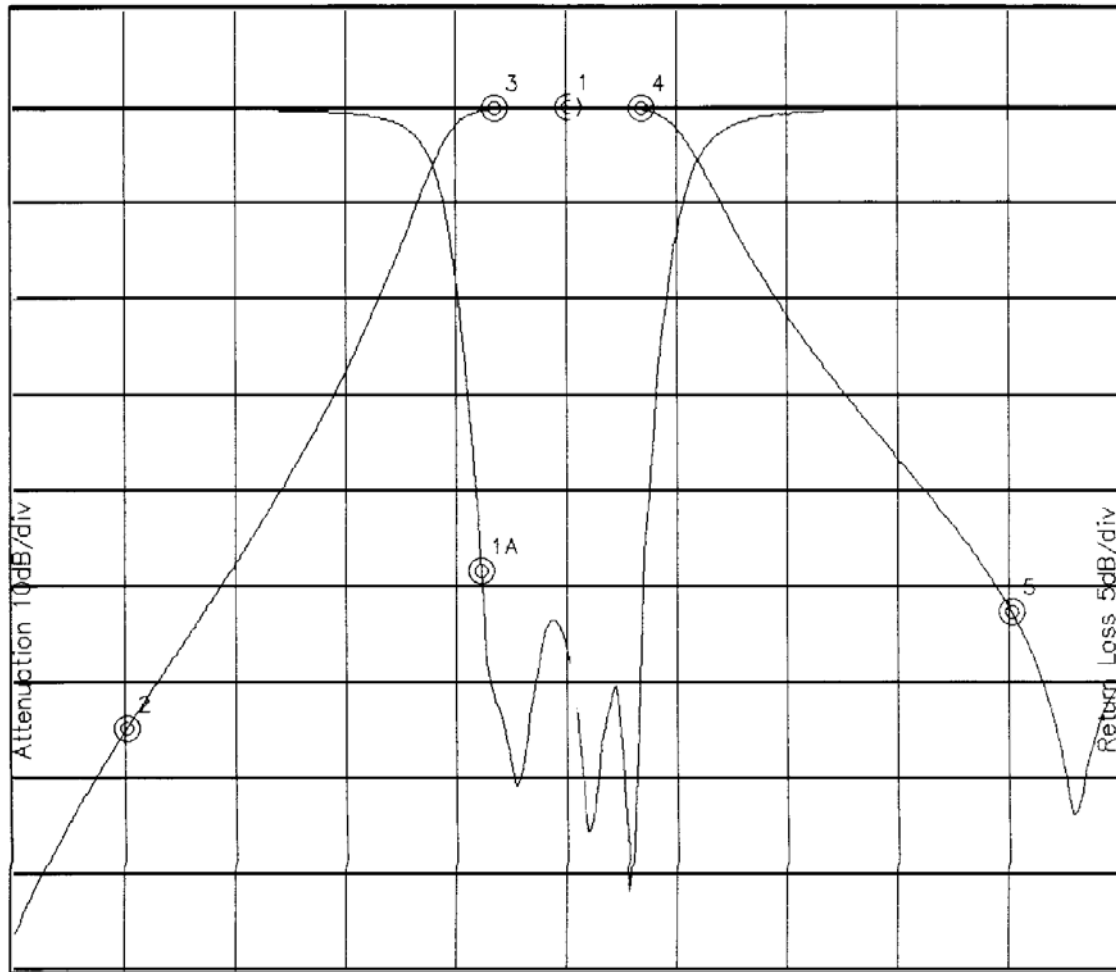

Attenuation Start: 100.0MHz Stop: 220.0MHz

Return Loss Start: 100.0MHz Stop: 220.0MHz

Offset -1.3043dB

Marker 1 Freq 160.09MHz Atten 0.023dB

Marker 1A Freq 150.59MHz Ret Loss -24.316dB

Marker 2 Freq 112.01MHz Atten -65.260dB

Marker 3 Freq 152.14MHz Atten -0.268dB

Marker 4 Freq 168.04MHz Atten -0.301dB

Marker 5 Freq 208.17MHz Atten -53.026dB