



## AS0102-30 1 GHz TO 2 GHz 30 WATT BROADBAND POWER AMPLIFIER



- Upgradeable to higher power
- High reliability GaAs transistor technology
- Mismatch tolerant and unconditionally stable
- Wide instantaneous bandwidth
- Unique five year parts, labour and shipping warranty
- Integral directional coupler
- RS232, USB and ethernet or RS232 and GPIB

This innovative amplifier combines a compact design with market leading performance. Its ability to operate into any load without fold back makes this an ideal amplifier for all EMC RF immunity testing. The amplifier is supported via Milmega's unique five year parts, labour and shipping warranty and Teseq's local service network.

The amplifier is designed ready for a simple upgrade to higher power levels by the addition of extra power modules into the existing mainframe. If more power is required once fully loaded the unit can be integrated with further additional units to achieve power levels up to 1000 watts.


Designed specifically for radiated EMC testing, this mismatch tolerant amplifier delivers power continuously into the poor and variable match typically associated with EMC antenna.

A selection of remote interfaces are available and the user can select, at time of ordering, either the internal RS232, USB and ethernet or the external RS232 and GPIB unit housed in a 1U module at no additional cost.

The GaAs balanced pair design at the core of the amplifier ensures a high reliability, linear performance across the frequency range. This design also ensures that the amplifier will continue to operate at full power even when presented with an open or short circuit at its output.

The unit is powered from a switched mode power supply for high efficiency, high power factor and wide voltage range operation. The unit is air-cooled with integral fans, and is protected against faulty cooling by excess temperature sensing. A safety interlock connector is provided, which the user can short circuit to ground, to put the amplifier into standby mode. Front panel indicators are provided to indicate over-temperature and RF interlock condition.

### Measured data

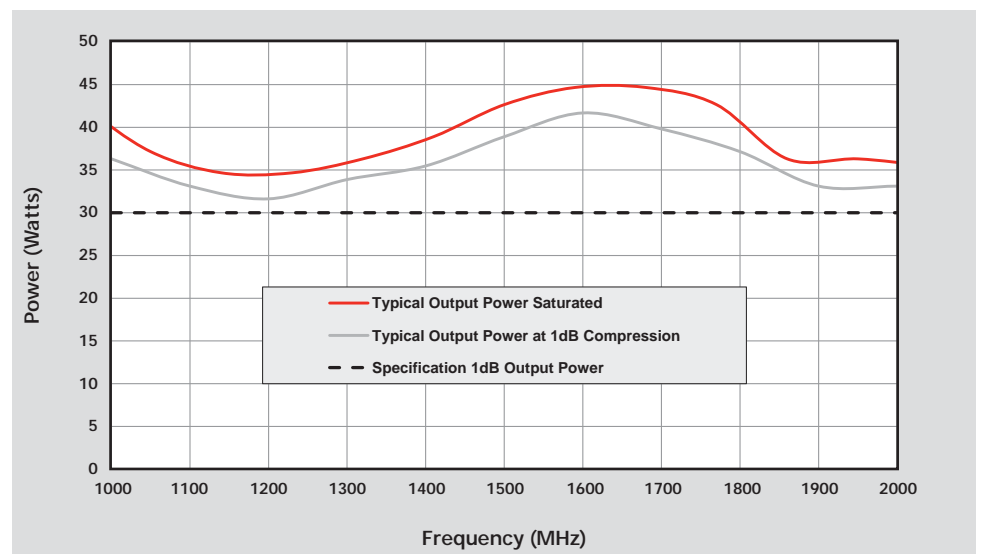

# AS0102-30

## 1 GHz TO 2 GHz 30 WATT BROADBAND POWER AMPLIFIER

### Key RF Parameters

|                                       |                 |
|---------------------------------------|-----------------|
| Frequency range (instantaneous)       | 1 to 2 GHz      |
| Rated output power                    | 33 W minimum    |
| Power at 1 dB gain compression (P1dB) | 30 W minimum    |
| Harmonics at P1dB                     | -20 dBc typical |
| Gain                                  | 40.7 dB         |
| Gain variation with frequency         | +/-1 dB         |
| Maximum input power (no damage)       | 15 dBm          |

### Impedance / VSWR

|                       |                    |
|-----------------------|--------------------|
| Output VSWR tolerance | Infinite any phase |
| Stability             | Unconditional      |
| Output impedance      | 50 Ohm             |
| Output VSWR           | 2:1 typical        |
| Input VSWR            | 2:1 max            |

### Additional RF Data

|                                 |                               |
|---------------------------------|-------------------------------|
| Third order intercept point IP3 | 10 dB > P1dB                  |
| Spurious                        | -70 dBc max (-80 dBc typical) |
| Noise figure                    | 6 dB                          |
| RF connector style              | Type N female                 |

### Electrical and Interfaces

|                               |  |
|-------------------------------|--|
| Remote control                | Internal RS232, USB and ethernet or RS232 and GPIB in additional external 1U high unit |
| Safety interlock              | Rear panel mounted BR2-female  |
| Supply voltage (single phase) | 85 to 260 VAC  |
| Supply frequency              | 50 to 60 Hz  |
| Supply power                  | <0.35 kVA  |

### Physical / Environmental

|                             |                                   |
|-----------------------------|-----------------------------------|
| Case dimensions             | 19 inch, 3U case, 527 mm deep     |
| Mass                        | 14 kg                             |
| Operating temperature range | 0 to 40° C (storage -40 to 70° C) |

#### MILMEGA

Park Road, Ryde, Isle of Wight, PO33 2BE, UK  
T +44 (0) 1983 618004 F +44 (0) 1983 811521  
sales@milmega.co.uk [www.milmega.co.uk](http://www.milmega.co.uk)  
[www.teseq.com](http://www.teseq.com)

© November 2013 MILMEGA  
Specifications subject to change without notice.  
Teseq® is an ISO-registered company. Its products  
are designed and manufactured under the strict  
quality and environmental requirements of the ISO  
9001. This document has been carefully checked.  
However, Teseq® does not assume any liability for  
errors or inaccuracies.