


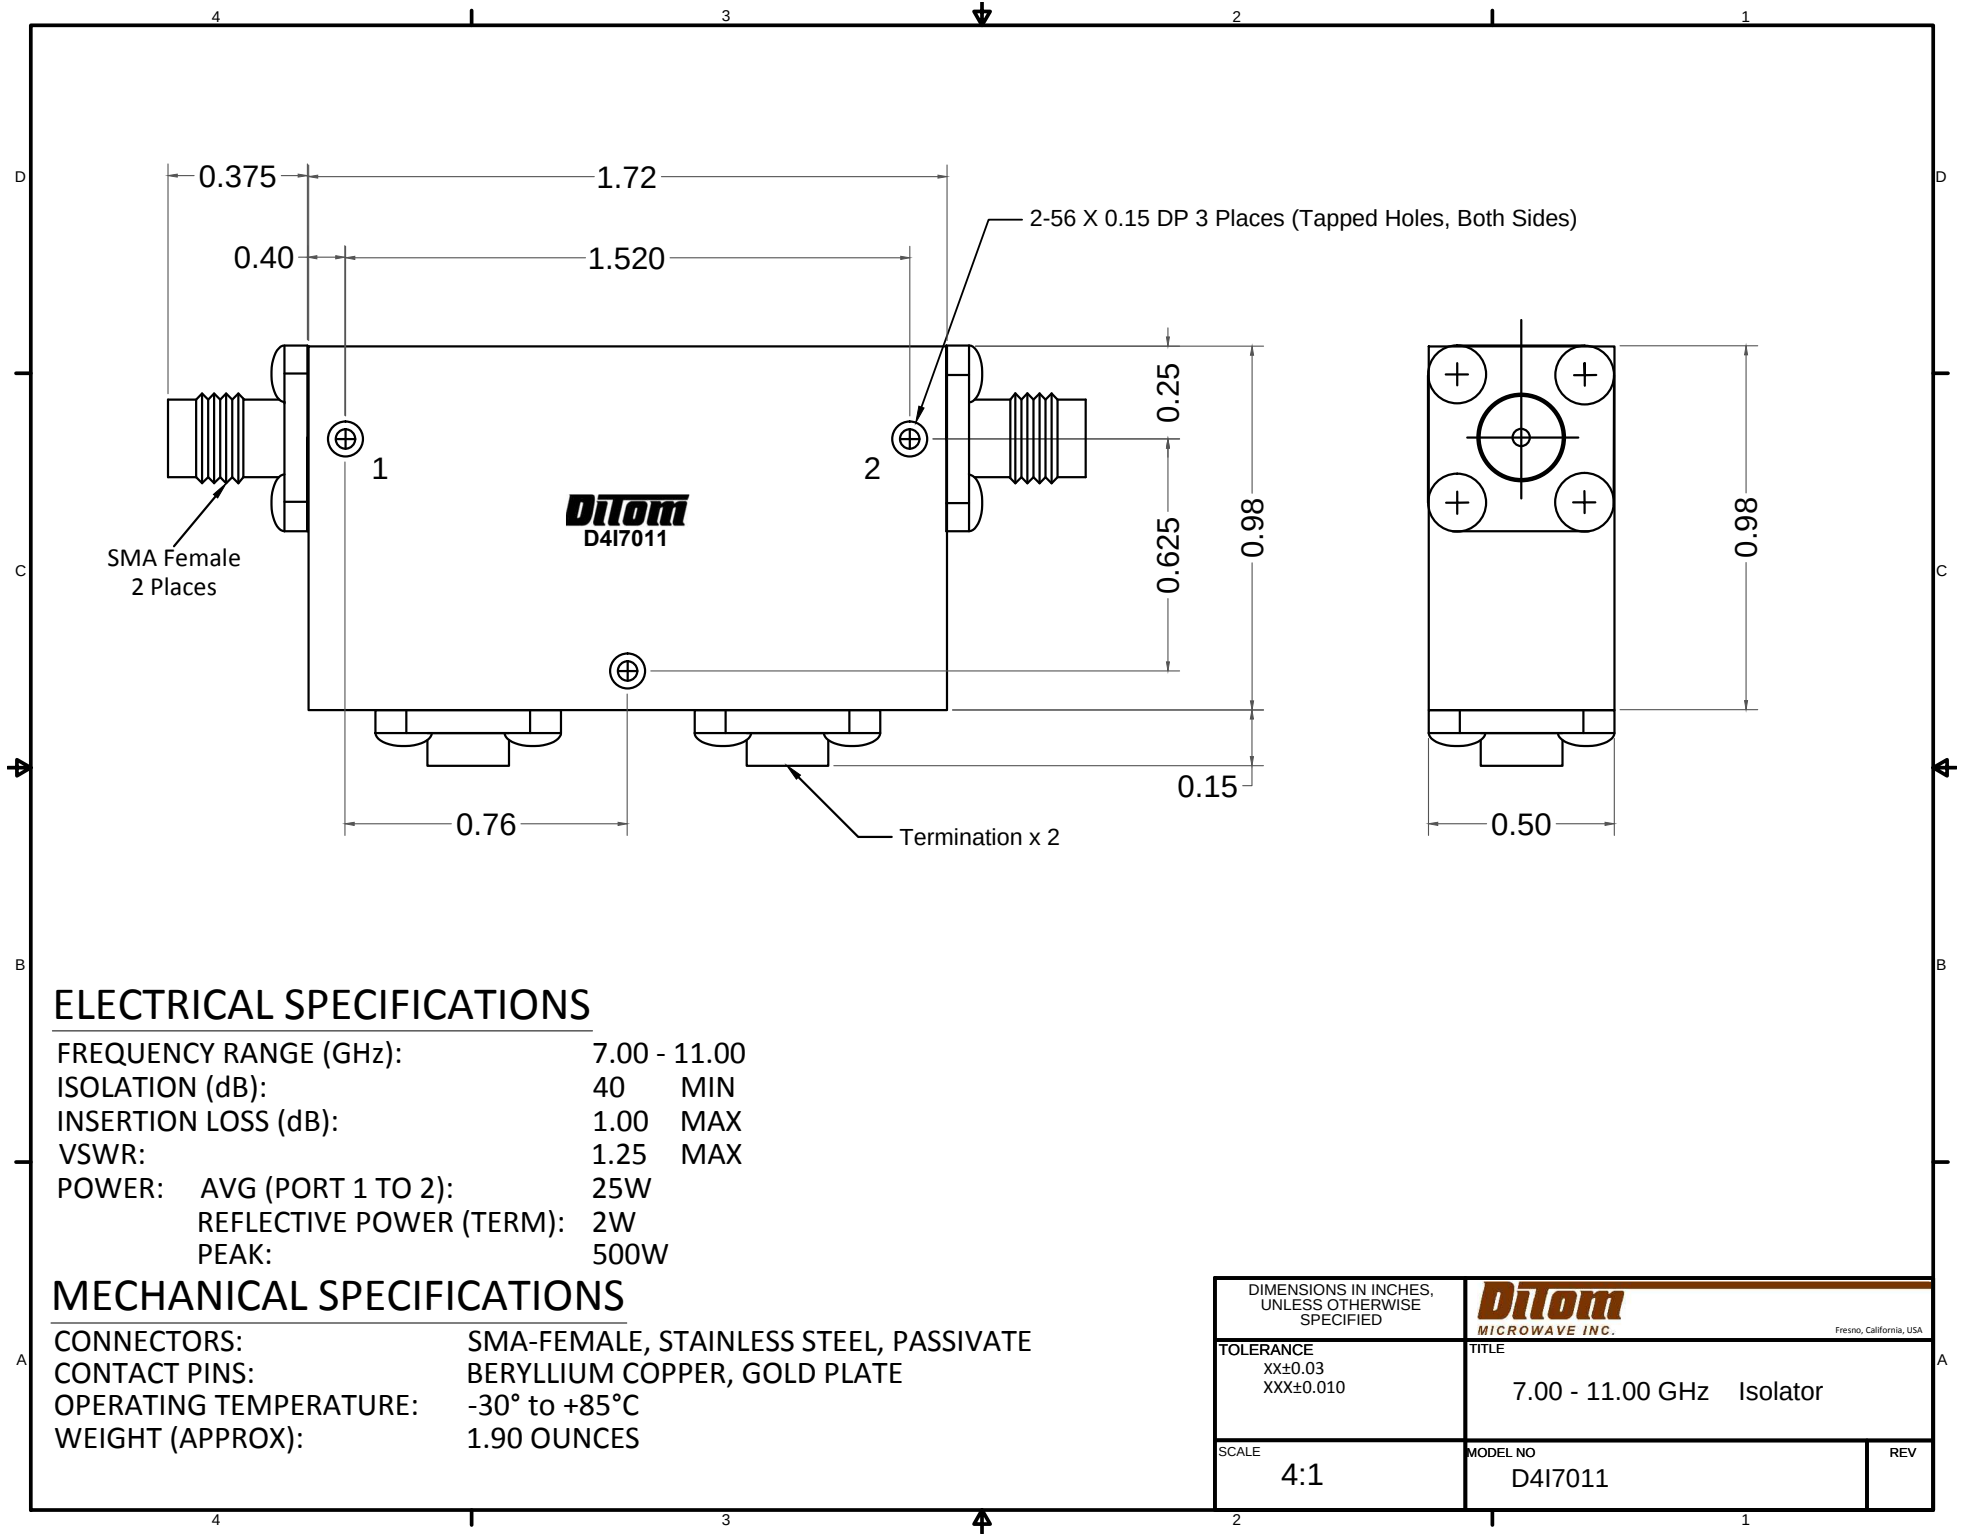

ELECTRICAL SPECIFICATIONS

FREQUENCY RANGE (GHz):	7.00 - 11.00
ISOLATION (dB):	40 MIN
INSERTION LOSS (dB):	1.00 MAX
VSWR:	1.25 MAX
POWER: AVG (PORT 1 TO 2):	25W
REFLECTIVE POWER (TERM):	2W
PEAK:	500W

MECHANICAL SPECIFICATIONS

CONNECTORS:	SMA-FEMALE, STAINLESS STEEL, PASSIVATE
CONTACT PINS:	BERYLLIUM COPPER, GOLD PLATE
OPERATING TEMPERATURE:	-30° to +85°C
WEIGHT (APPROX):	1.90 OUNCES

DIMENSIONS IN INCHES, UNLESS OTHERWISE SPECIFIED		DITOM MICROWAVE INC. Fresno, California, USA	
TOLERANCE XX±0.03 XXX±0.010		TITLE 7.00 - 11.00 GHz Isolator	
SCALE 4:1	MODEL NO D4I7011		REV