


✳ 型号描述 How to Order

XB-WDC-□□□-□□□-□□□

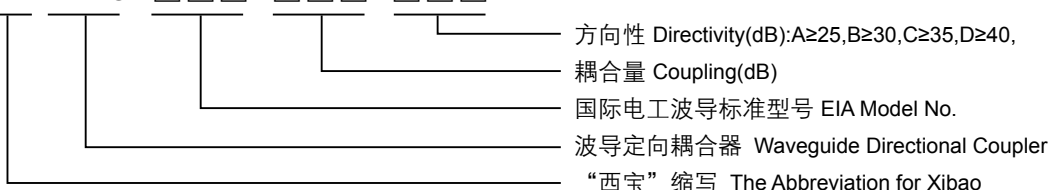

✳ 型号及指标 Model & Specifications

型号 Model	频率范围 Freq (GHz)	法兰 Flange	耦合量 Coupling (dB)	方向性 Directivity (dB)	驻波 VSWR (Main)	驻波 VSWR (Second)
XB-WDC430-□□-□□	1.72~2.61	FDP/FDM	3~60	20~35	≤1.05	≤1.15
XB-WDC340-□□-□□	2.17~3.30	FDP/FDM	3~60	20~35	≤1.05	≤1.15
XB-WDC284-□□-□□	2.60~3.95	FDP/FDM	3~60	20~40	≤1.05	≤1.15
XB-WDC229-□□-□□	3.22~4.90	FDP/FDM	3~60	20~40	≤1.05	≤1.15
XB-WDC187-□□-□□	3.94~5.99	FDP/FDM	3~60	20~40	≤1.05	≤1.15
XB-WDC159-□□-□□	4.64~7.05	FDP/FDM	3~60	20~40	≤1.05	≤1.15
XB-WDC137-□□-□□	5.38~8.17	FDP/FDM	3~60	20~40	≤1.05	≤1.15
XB-WDC112-□□-□□	6.57~9.99	FBP/FBM/FBE	3~60	20~40	≤1.05	≤1.15
XB-WDC90-□□-□□	8.20~12.40	FBP/FBM/FBE	3~60	20~40	≤1.05	≤1.15
XB-WDC75-□□-□□	9.84~15.0	FBP/FBM/FBE	3~60	20~40	≤1.05	≤1.15
XB-WDC62-□□-□□	11.9~18.0	FBP/FBM/FBE	3~60	20~40	≤1.05	≤1.15
XB-WDC51-□□-□□	14.5~22.0	FBP/FBM/FBE	3~60	20~40	≤1.05	≤1.15
XB-WDC42-□□-□□	18.0~26.5	FBP/FBM/FBE	3~60	20~40	≤1.05	≤1.15
XB-WDC34-□□-□□	21.7~33.0	FBP/FBM/FBE	3~60	20~40	≤1.05	≤1.15
XB-WDC28-□□-□□	26.5~40.0	FBP/FBM/FBE	3~60	20~40	≤1.05	≤1.15
XB-WDC22-□□-□□	33.0~50.0	UG383/U	3~60	20~40	≤1.08	≤1.15
XB-WDC19-□□-□□	39.2~59.6	UG383/U-Mod	3~60	20~35	≤1.08	≤1.15
XB-WDC15-□□-□□	50.0~75.0	UG-385/U-Mod	3~60	20~35	≤1.1	≤1.15
XB-WDC12-□□-□□	60.5~91.9	UG-387/U-Mod	3~60	20~30	≤1.1	≤1.15
XB-WDC10-□□-□□	75.0~110	UG-387/U-Mod	3~60	20~25	≤1.1	≤1.15

※ 以上只是常规产品，其它品种的频率覆盖范围可从1.45~110GHz，波导型号可从WR510 (BJ18)~WR10 (BJ900)
 Other Products: F=1.45~110GHz, Waveguide WR510 (BJ18)~WR10 (BJ900)