

FREQUENCY SYNTHESIZER

452017

300 - 400 MHz

Features

- Low Phase Noise
- Low Spurious Outputs
- High Reliability
- Internal Reference Model

Specifications

CHARACTERISTIC		TYPICAL Ta = +25 °C	MIN/MAX Ta = -10°C to +60 °C
Frequency (MHz)		300 - 400	300 - 400
Output Power (dBm)		+13	0 / +17.0
Step Size		1 MHz	1 Hz / 10 MHz
Stability (ppm)		±10	—
Harmonics (dBc)		-25	-20 Max.
Spurious (dBc)		-70	—
Phase Noise (300 MHz)		-45 dBc/Hz @ 10 Hz -75 dBc/Hz @100 Hz -85 dBc/Hz @ 1 kHz -85 dBc/Hz @ 10 kHz -120 dBc/Hz @ 100 kHz -143 dBc/Hz @ 1 MHz	—
Power	Vdc mA	+15 150	+15 —

NOTE: Care should always be taken to effectively ground the case of each unit.

Absolute Maximum (No Damage) Ratings

Ambient Operating Temperature -55°C to +100 °C

Storage Temperature -62°C to +125 °C



Case Temperature +125 °C

DC Voltage +24 Volts

Spectrum Microwave can design a synthesizer to meet your requirements, from low-cost surface mount commercial units to complex multiple conversion designs for military and space applications.

We have delivered units with step sizes from 0.002 Hz to 200 MHz, 5-microsecond switching speeds, automatically switched back-up references, direct digital synthesis, and many other special features.

Typical Performance Data

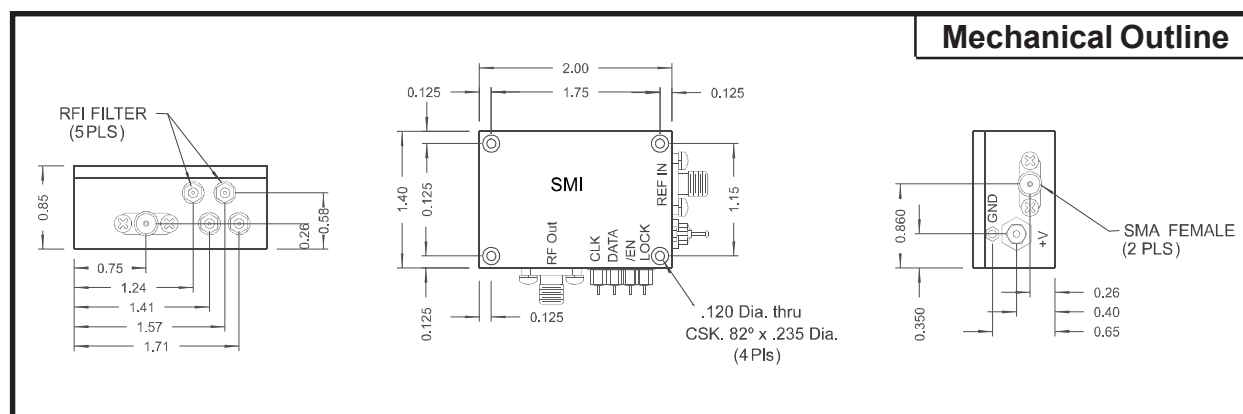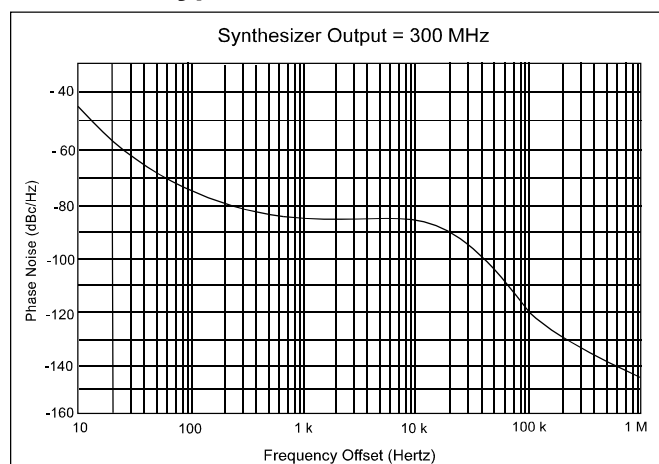

Spectrum Microwave · 2144 Franklin Drive N.E. · Palm Bay, Florida 32905 · PH (888) 553-7531 · Fax (888) 553-7532 Rev. 3/20/10

Rev.
3/30/10

www.SpectrumMicrowave.com Spectrum Microwave · 2707 Black Lake Place · Philadelphia, Pennsylvania 19154 · PH (215) 464-4000 · Fax (215) 464-4001