

Specifications


Parameter	Unit	Min	Typical	Max
Center Frequency (F0)	MHz		200	
Bandwidth (B)	MHz		66	
-3 dB Bandwidth (B3)	MHz	70	70.3	
-40 dB Bandwidth (B40)	MHz		81.8	82.8
Delay (T0)	μsec	0.418	0.42	0.421
Insertion Loss (IL)	dB		31.5	34
Amplitude Ripple	dB p-p		0.4	1
Phase Ripple	deg p-p		1.5	2.5
Rejection	dB	48	51	
Spurious for $ t-T0 > .9T0$	dB		-46	-42
Substrate Material	128YX-LN			

Notes:

1. Center Frequency (F0) and Bandwidth (B) are defined, not measured.
2. Insertion Loss is the minimum loss for $|f-F0| < .5B$
3. Ripple spec applies to the $|f-F0| < .4B$, and is doubled for $.4B < |f-F0| < .5B$
4. Rejection spec applies to $(B40 \text{ Spec} - B/2) < |f-F0| < F0/2$
5. Specifications are at 22C only. Unit will operate undamaged from -54C to 125C with shifts $dF0 = -x \cdot F0$, $dT0 = x \cdot T0$, where $x = 75E-6 \cdot (\text{temperature} - 22C)$


Typical Performance

Frequency Response
(Best Fit Linear Phase Removed)

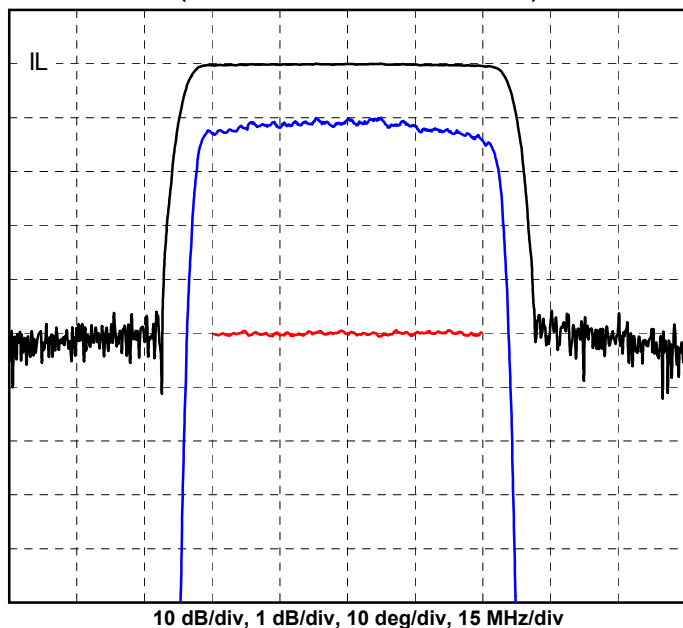


Impulse Response


FFT(Frequency Response * Cos(0.5 * PI * MIN(1, MAX(0, |f-F0| * 2.0/B - 1.0))))^2

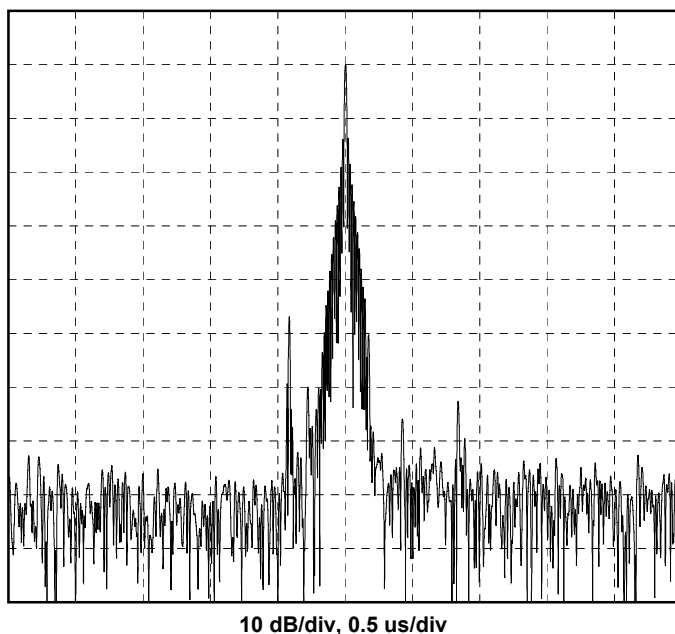

Package Outline

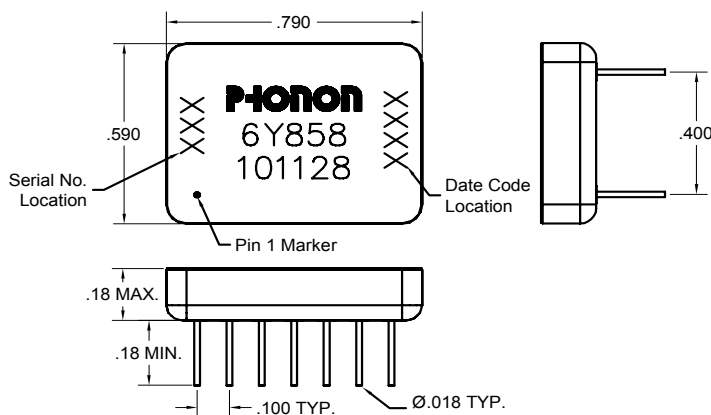

Matching

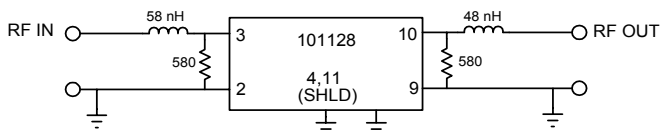

Matched S-parameters available at www.phonon.com