


# BROADBAND COAXIAL CIRCULATOR

P/N:H507




## TYPICAL PLOT:

### Insertion loss

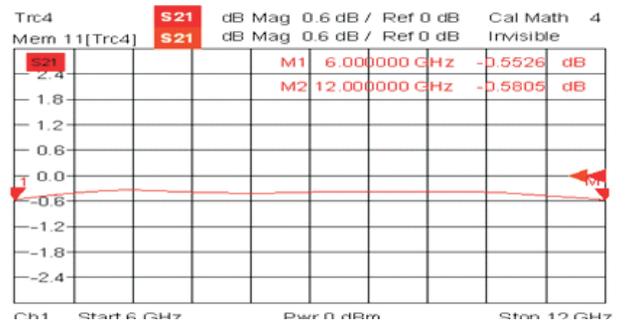

### Isolation

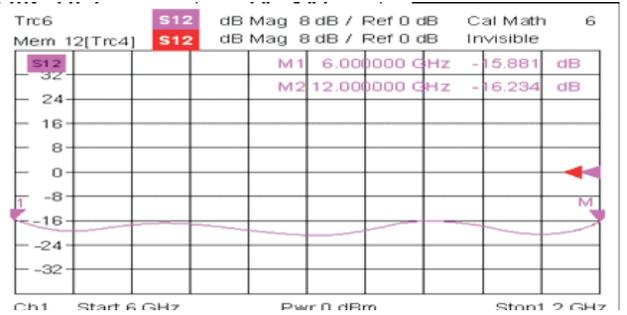

## FEATURES AND APPLICATION:

- ◆ Octave or even wider Bandwidth with coaxial connectors at Input and Output Port
- ◆ Could be used in EW, Radar, Test systems and Wide Band Microwave Assemblys.


## TECHNICAL SPECIFICATIONS:

Model Number	Frequency Range	Insertion Loss	VSWR	Isolation	Average Power	Transmission Direction	Connector
H507-1P	5.7-7.1GHz	0.3dB	1.2	20dB	10W	Anticlockwise	SMA-F
H507-1C	7-8.5GHz	0.3 dB	1.2	20dB			
H507-1H	10.1-11.7GHz	0.3dB	1.2	20dB			
H507-1L	6-12GHz	0.6dB	1.4	15dB			

## ENVIRONMENTAL PARAMETERS:

WORKING TEMPERATURE: -20~+70°C

## OUTLINE:

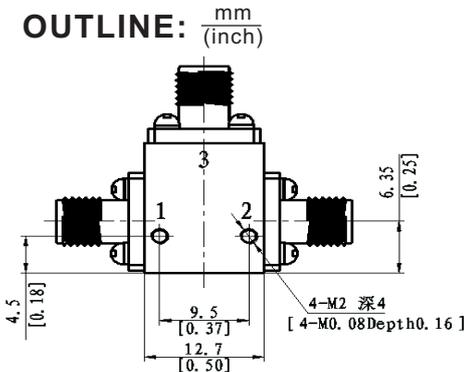

## VSWR

