

Bandpass Filter

SXBP-1200+

50Ω 800 to 1800 MHz


Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power Input	0.5W Max.
Permanent damage may occur if any of these limits are exceeded.	

Pin Connections

INPUT	1
OUTPUT	8
GROUND	2, 3, 4, 5, 6, 7


Outline Drawing

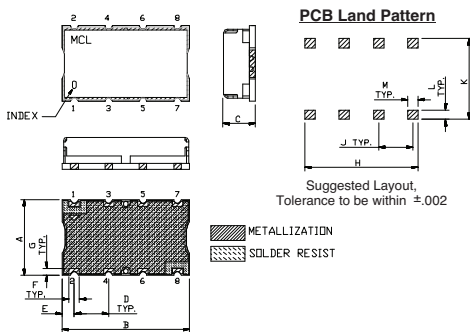

Outline Dimensions (inch/mm)

	A	B	C	D	E	F
	.44	.74	.19	.200	.07	.060
	11.18	18.80	4.83	5.08	1.78	1.52
	G	H	J	K	L	M
	.040	.660	.200	.470	.055	.060
	1.02	16.76	5.08	11.94	1.40	1.52
						grams
						3.0

Demo Board MCL P/N: TB-368 Suggested PCB Layout (PL-230)

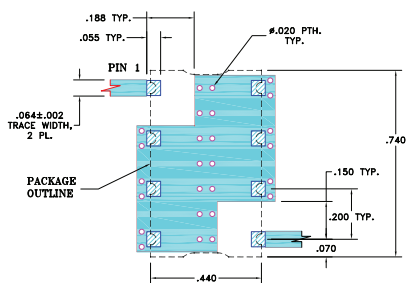


Features

- wideband, 800 to 1800 MHz
- flat group delay @ passband, 1 nsec typ.
- shielded case
- aqueous washable

Applications

- receivers/transmitters
- wireless communication systems
- harmonic rejection



CASE STYLE: HF1317
PRICE: \$17.95 ea. QTY (1-9)


+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications


Bandpass Filter Electrical Specifications (T_{AMB} = 25°C)

CENTER FREQ. (MHz)	PASSBAND (MHz) (Loss < 2dB)	STOPBANDS (MHz)				VSWR (:1)		
		Loss > 20dB		Loss 30dB Typ.		Passband		Stopband
F _c	F ₁ - F ₂	F ₃	F ₄	F ₅	F ₆	Typ.	Max.	Typ.
1200	800 - 1800	535	2220	530	2250 - 5000	1.5	2.1	20

Typical Frequency Response


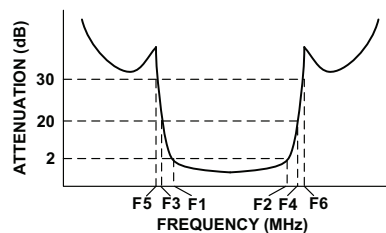


Functional Schematic

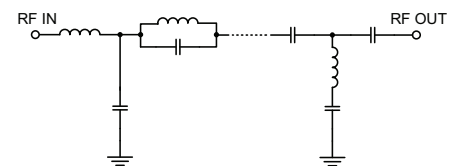

Typical Performance Data at 25°C

Frequency (MHz)	Insertion Loss (dB)		Return Loss (dB)	Frequency (MHz)	Group Delay (nSec)
	$\bar{x}$	σ			
1.0	72.93	0.47	0.00	800.0	1.66
530.0	38.97	2.80	0.49	850.0	1.49
535.0	34.49	2.93	0.51	900.0	1.37
570.0	15.37	0.93	0.88	950.0	1.29
600.0	7.18	0.56	2.18	1000.0	1.23
620.0	3.81	0.35	4.23	1050.0	1.19
650.0	1.61	0.13	8.35	1150.0	1.14
800.0	0.67	0.02	17.38	1200.0	1.13
1000.0	0.77	0.01	13.11	1250.0	1.13
1200.0	0.79	0.01	13.92	1300.0	1.13
1500.0	0.97	0.04	14.26	1350.0	1.14
1800.0	1.23	0.06	25.74	1400.0	1.15
1970.0	3.72	0.83	6.44	1500.0	1.19
2030.0	8.79	1.47	3.08	1600.0	1.27
2100.0	16.46	1.72	1.67	1650.0	1.32
2220.0	32.60	2.60	1.02	1700.0	1.39
2250.0	36.64	3.50	0.96	1750.0	1.48
5000.0	32.11	1.21	0.98	1800.0	1.63

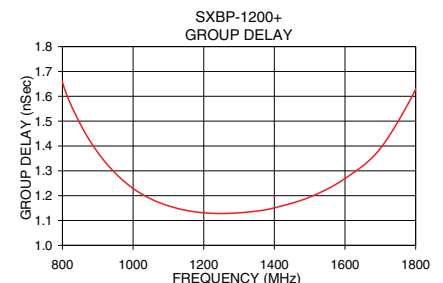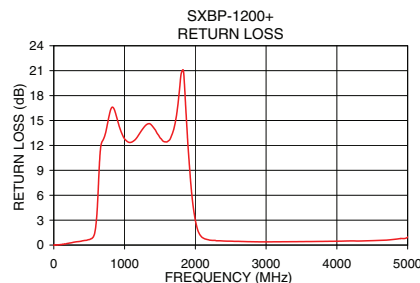

Mini-Circuits®
ISO 9001 ISO 14001 AS 9100 CERTIFIED
The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com
IF/RF MICROWAVE COMPONENTS

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuits' applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

For detailed performance specs
& shopping online see web site

REV. OR
M117937
EDR-9257U
SXBP-1200+
URJ/RAV
110817
Page 1 of 1