



0.5 Watts Low Power WR-42 Waveguide
Load 18 GHz to 26.5 GHz

TECHNICAL DATA SHEET

PE6802

Configuration

Connector	WR-42
Heat Sink	Aluminum
Mount Method	Square Cover

Electrical Specifications

Frequency Range, GHz	18 to 26.5
Impedance, Ohms	50
Maximum VSWR	1.25:1
Maximum Input Power, Watts	0.5

Mechanical Specifications

Size

Length, in [mm]	0.69 [17.53]
Width/Dia., in [mm]	0.88 [22.35]
Height, in [mm]	0.88 [22.35]

Connector

Type	WR-42
------	-------

Compliance Certifications (visit www.Pasternack.com for current document)

Not RoHS Compliant	
REACH Compliant	12/15/2010

Plotted and Other Data

Notes:

- Values at +25 °C, sea level

0.5 Watts Low Power WR-42 Waveguide Load 18 GHz to 26.5 GHz from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [0.5 Watts Low Power WR-42 Waveguide Load 18 GHz to 26.5 GHz PE6802](http://www.pasternack.com/waveguide-termination-frequency-range-1800-2650-ghz-pe6802-p.aspx)

URL: <http://www.pasternack.com/waveguide-termination-frequency-range-1800-2650-ghz-pe6802-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

0.5 Watts Low Power WR-42 Waveguide Load 18 GHz to 26.5 GHz

0.5 Watts Low Power WR-42 Waveguide Load 18 GHz to 26.5 GHz

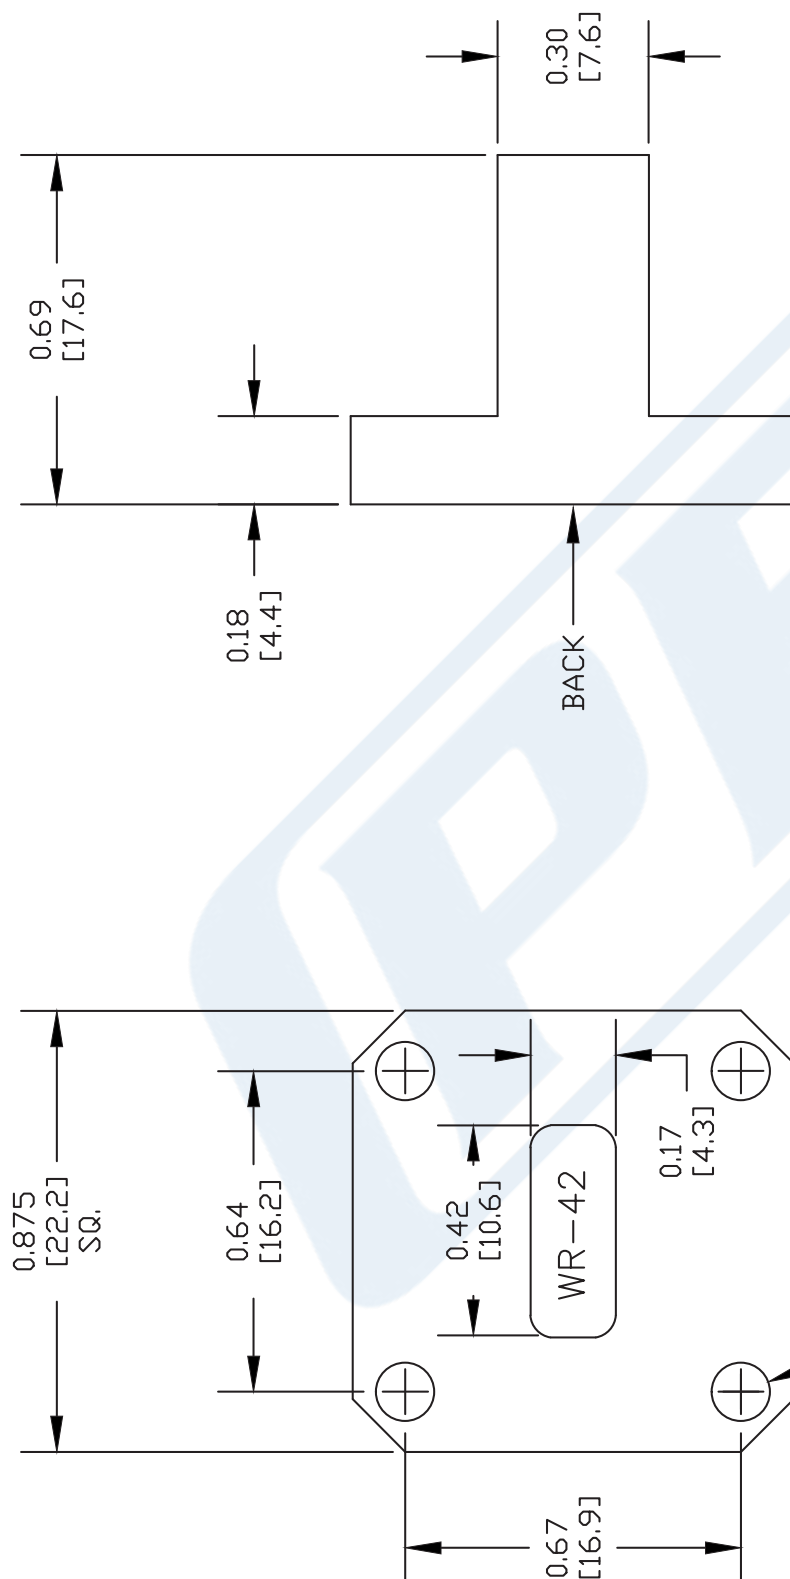

BACK VIEW

DWG TITLE

PE6802

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].

Phone: (949) 261-1920 | **Fax:** (949) 261-7451
Website: www.pasternack.com | **E-Mail:** sales@pasternack.com

FSCM NO. 53919

CAD FILE	100110-A	SCALE	N/A
----------	----------	-------	-----

SIZE A

XXXX

XXXX