


400 Watt C and Ku-Band Rack Mount High Power Amplifier

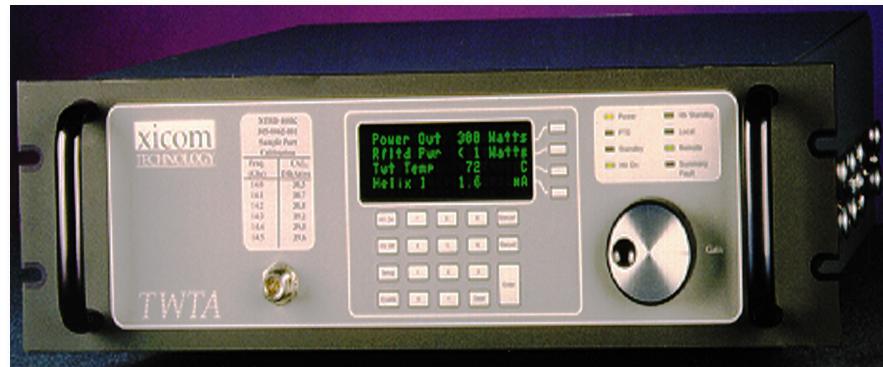

FEATURES

- *Rack mount dual band for fixed and transportable applications.*
- *Compact 3RU chassis*
- *Extended frequency bands available*
- *Menu driven front panel display & control*
- *High efficiency*
- *Optional integrated linearizer*

The **XTRD-400DB** is a highly efficient rack-mountable traveling wave tube (TWT) amplifier designed for fixed and mobile uplink applications. The unit includes RF gain control, a solid state pre-amplifier, RF filters, cooling, and monitoring & control (M&C) systems. Rack space is conserved because the amplifier occupies only 3 rack units (5 1/4 inches) of a standard 19 inch rack cabinet. Nominal weight is 50 pounds.

The unit features a menu driven front panel display, RS-232/422/485 serial port interfaces for complete computer control. RF, traveling wave tube, and default parameters are easily monitored on the four line front panel display. Gain control is provided via the front panel or through the serial interface.

The **XTRD-400DB** amplifier incorporates high efficiency dual-stage collector TWTs. Reliability is enhanced because both prime power consumption and internal operating temperatures are reduced for both the linear and saturated modes of operation. Power factor correction circuitry is also included which minimizes line current distortion and reduces the required Volt-Amps input. The automatic features of the high frequency resonant conversion power supply include quick recovery from prime power supply outages and multiple helix fault resets (three fault cycles). Depending upon user requirements, this high power amplifier can be configured for either single thread or redundant system operation.




PERFORMANCE SPECIFICATION


| Parameters | C-Band | Ku-Band |
|------------------------------------------------------------|--------------------------------------------------------------------------------------------|-----------------------------------------|
| FREQUENCY RANGE (extended frequency coverage available) | 5.85 to 6.425 GHz * | 14.0 to 14.5 GHz (13.75 to 14.5 GHz) |
| OUTPUT POWER | | |
| Traveling Wave Tube | 400 W | |
| Rated Power @ Amplifier Flange (minimum) | 350 W | |
| GAIN | | |
| Large Signal (minimum) | 60 dB | 62 dB |
| Small Signal (minimum) | 63 dB | 65 dB |
| Attenuator Range (continuous) | 20 dB | |
| Maximum SSG Variation Over: | | |
| Any Narrow Band | 1.5 dB per 40 MHz | 1.3 dB per 80 MHz |
| Full Band | 2.5 dB | |
| Slope (maximum) | ± 0.04 dB/MHz | |
| Stability, 24 hr. (maximum) | ± 0.25 dB | |
| Stability, Temperature (maximum) | ± 1.0 dB over temperature range at any frequency | |
| INTERMODULATION (maximum) with two equal carriers | -17 dBc @ 4 dB total output power backoff from rated power | |
| HARMONIC OUTPUT (maximum) * | 0 dBc @ 49 dBm | -12 dBc |
| AM/PM CONVERSION (maximum) | 2.5 deg/dB at 6 dB below rated power | |
| NOISE POWER (maximum) * | | |
| Transmit Band | -64 dBW/4 kHz | |
| Receive Band | -64 dBW/4 kHz 3.7 to 4.2 GHz | 10.95 to 12.75 GHz |
| GROUP DELAY (maximum) | | |
| Bandwidth | Any 40 MHz | Any 80 MHz |
| Linear | 0.01 nS/MHz | |
| Parabolic | 0.005 nS/MHz ² | |
| Ripple | 0.5 nS/Pk-Pk | |
| RESIDUAL AM NOISE (maximum) | -50 dBc to 10 kHz -20 (1.5 + logf) dBc 10 to 500 kHz -85 dBc above 500 kHz | |
| PHASE NOISE (maximum) | 12 dB below IESS phase noise profile AC fundamental -50 dBc Sum of all spurs -47 dBc | |
| VSWR | | |
| Input (maximum) | 1.3:1 | |
| Output (maximum) | 2.2:1 | |

* Harmonic/receive band filtering not included

BLOCK DIAGRAM

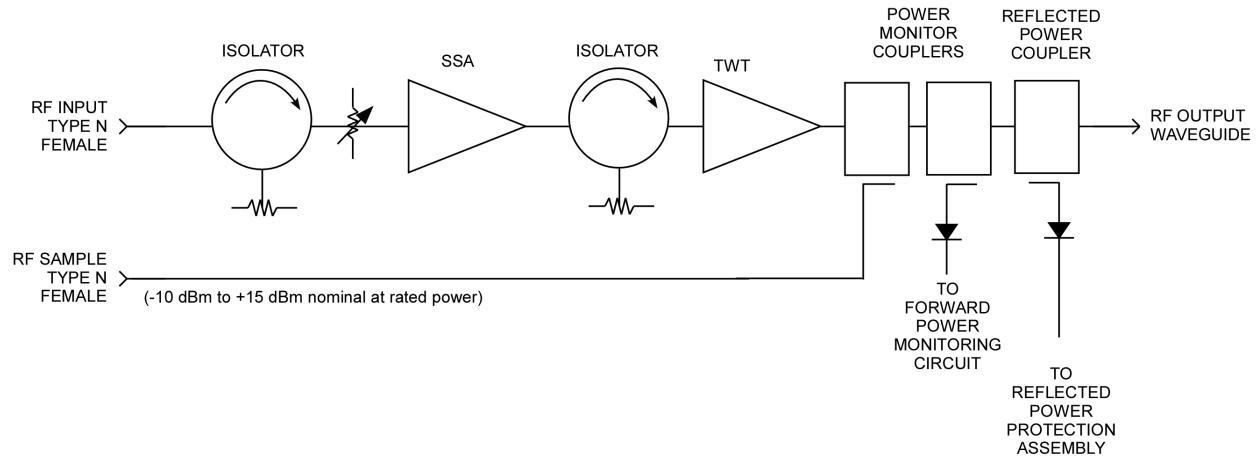

OUTLINE DRAWING

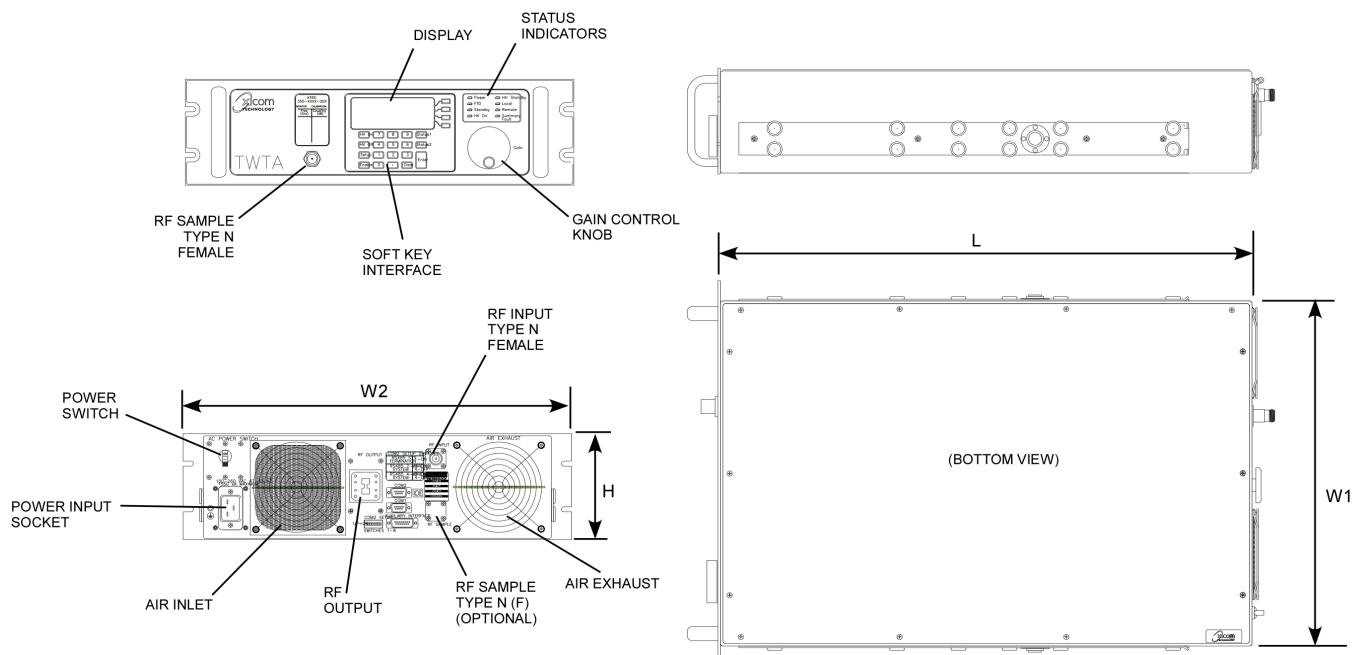

| DIMENSIONS | | |
|------------|--------|-------------|
| | INCHES | CENTIMETERS |
| L | 26.00 | 66.04 |
| W1 | 17.00 | 43.18 |
| W2 | 19.00 | 48.26 |
| H | 5.219 | 13.26 |

Nominal Weight: 50 lbs (22.68 kg)

XTRD-400DB

COMTECH
XICOM TECHNOLOGY

PRIME POWER

180 to 264 VAC
47 to 63 Hz, Single Phase
2200 VA (maximum)
0.95 Minimum Prime Power Factor



ENVIRONMENT

| | |
|--------------------------------|--------------------------------------------|
| NONOPERATING TEMPERATURE RANGE | -50°C to +70°C |
| OPERATING TEMPERATURE RANGE | -10°C to +50°C (2°C/1000 Feet Derating) |
| HUMIDITY | Up to 95% Noncondensing |
| ALTITUDE | 10,000 Feet MSL (maximum) |
| SHOCK AND VIBRATION | Normal Transportation |
| COOLING | Forced Air |

INTERFACE

| | Type | Function |
|----------------------|-------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| CONTROLS | LOCAL | Local/Remote AC Power On/OFF |
| | LOCAL AND REMOTE | Gain High Voltage ON/OFF Min/Max Power Alarm/Fault Audio Alarm ON/OFF Reflected Power Alarm/Fault Units (Watts, dBm, dBW) Fault Reset Lamp Test Heater Standby ON/OFF |
| | FRONT PANEL LEDs | Standby Power Local Remote Summary Fault High Voltage ON/OFF Heater Time Out (FTD) Heater Standby |
| | FRONT PANEL DIGITAL DISPLAY | Power Out Beam Hours Reflected Power Helix Current TWT Temperature Helix Voltage Heater Hours Faults: High VSWR High Voltage Helix Current TWT Temperature |
| | DRY FORM-C RELAY CONTACTS (2) | Summary Fault |
| COMPUTER SERIAL PORT | HARDWARE INTERFACE | Two Ports: RS-232 & RS-422/RS-485 |
| | XICOM COMMAND SET | ASCII Commands |
| | RF SAMPLE PORT COUPLING | -37 dB Nominal |

OPTIONS

- Extended Frequency Coverage
- 1:1, 1:2, 1:N Redundancy
- Variable Phase Power Combining
- Integrated Linearizer

Headquarters

Comtech Xicom Technology, Inc.
3550 Bassett Street
Santa Clara, CA 95054
USA

Phone: +1-408-213-3000
Fax: +1-408-213-3001

email: sales@xicomtech.com
Web: www.xicomtech.com

Europe Sales Office

Comtech Xicom Technology Europe, LTD
4 Portland Business Center
Manor House Lane
Datchet
Berkshire SL3 9EG
United Kingdom

Phone: +011 44 (0) 1753 549 999
Fax: +011 44 (0) 1753 549 997

email: sales@xicomeurope.com
Web: www.xicomtech.com

Asia Sales Office

Comtech Xicom Technology
150 Cecil Street
#08-02
Singapore 069543

Phone: +011 65 6325 1953
Fax: +011 65 6325 1950

email: asisales@xicomtech.com
Web: www.xicomtech.com