



50 Ohm SMA Amplifier Operating From 100 MHz to 3 GHz With 18 dB Gain And 16 dB P1db

TECHNICAL DATA SHEET

PE1516

50 Ohm SMA Amplifier Operating From 100 MHz to 3 GHz With 18 dB Gain And 16 dB P1db

Configuration

Design	Broadband Amplifier
RF Input Connector	SMA Female
RF Input Connector Impedance	50 Ohms
RF Output Connector	SMA Female
RF Output Connector Impedance	50 Ohms
DC Bias Connector	Solder Pin

Electrical Specifications

Frequency Range, GHz	0.1 to 3
Typical Gain, dB	18
Output at 1 dB Compression Point, dBm	16
Operating DC Voltage, Volts	9 to 15
Maximum DC Current, mA	120

Frequency 1

Frequency, MHz	100 to 1,000
Input Return Loss, dB	18
Gain, dB	18

Frequency 2

Frequency, GHz	1 to 2
Return Loss, dB	20
Gain, dB	21

Frequency 3

Frequency, GHz	2 to 3
Return Loss, dB	18
Gain, dB	18

Mechanical Specifications

Temperature

Operating Range, deg C	-10 to +65
------------------------	------------

Size

Length, in [mm]	2.18 [55.37]
Width/Dia., in [mm]	1.18 [29.97]
Height, in [mm]	0.49 [12.45]

RF Input Connector

Type	SMA Female
------	------------

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [50 Ohm SMA Amplifier Operating From 100 MHz to 3 GHz With 18 dB Gain And 16 dB P1db PE1516](#)

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.



50 Ohm SMA Amplifier Operating From 100 MHz
to 3 GHz With 18 dB Gain And 16 dB P1db

TECHNICAL DATA SHEET

PE1516

RF Output Connector

Type

SMA Female

DC Bias Connector

Type

Solder Pin

Compliance Certifications (visit www.Pasternack.com for current document)

RoHS Compliant

Yes

Plotted and Other Data

Notes:

Values at 25 °C, sea level

50 Ohm SMA Amplifier Operating From 100 MHz to 3 GHz With 18 dB Gain And 16 dB P1db from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [50 Ohm SMA Amplifier Operating From 100 MHz to 3 GHz With 18 dB Gain And 16 dB P1db PE1516](http://www.pasternack.com/50-ohm-sma-amplifier-100-mhz-3000-mhz-18-db-gain-pe1516-p.aspx)

URL: <http://www.pasternack.com/50-ohm-sma-amplifier-100-mhz-3000-mhz-18-db-gain-pe1516-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.

PE1516 CAD Drawing

50 Ohm SMA Amplifier Operating From 100 MHz to
3 GHz With 18 dB Gain And 16 dB P1db

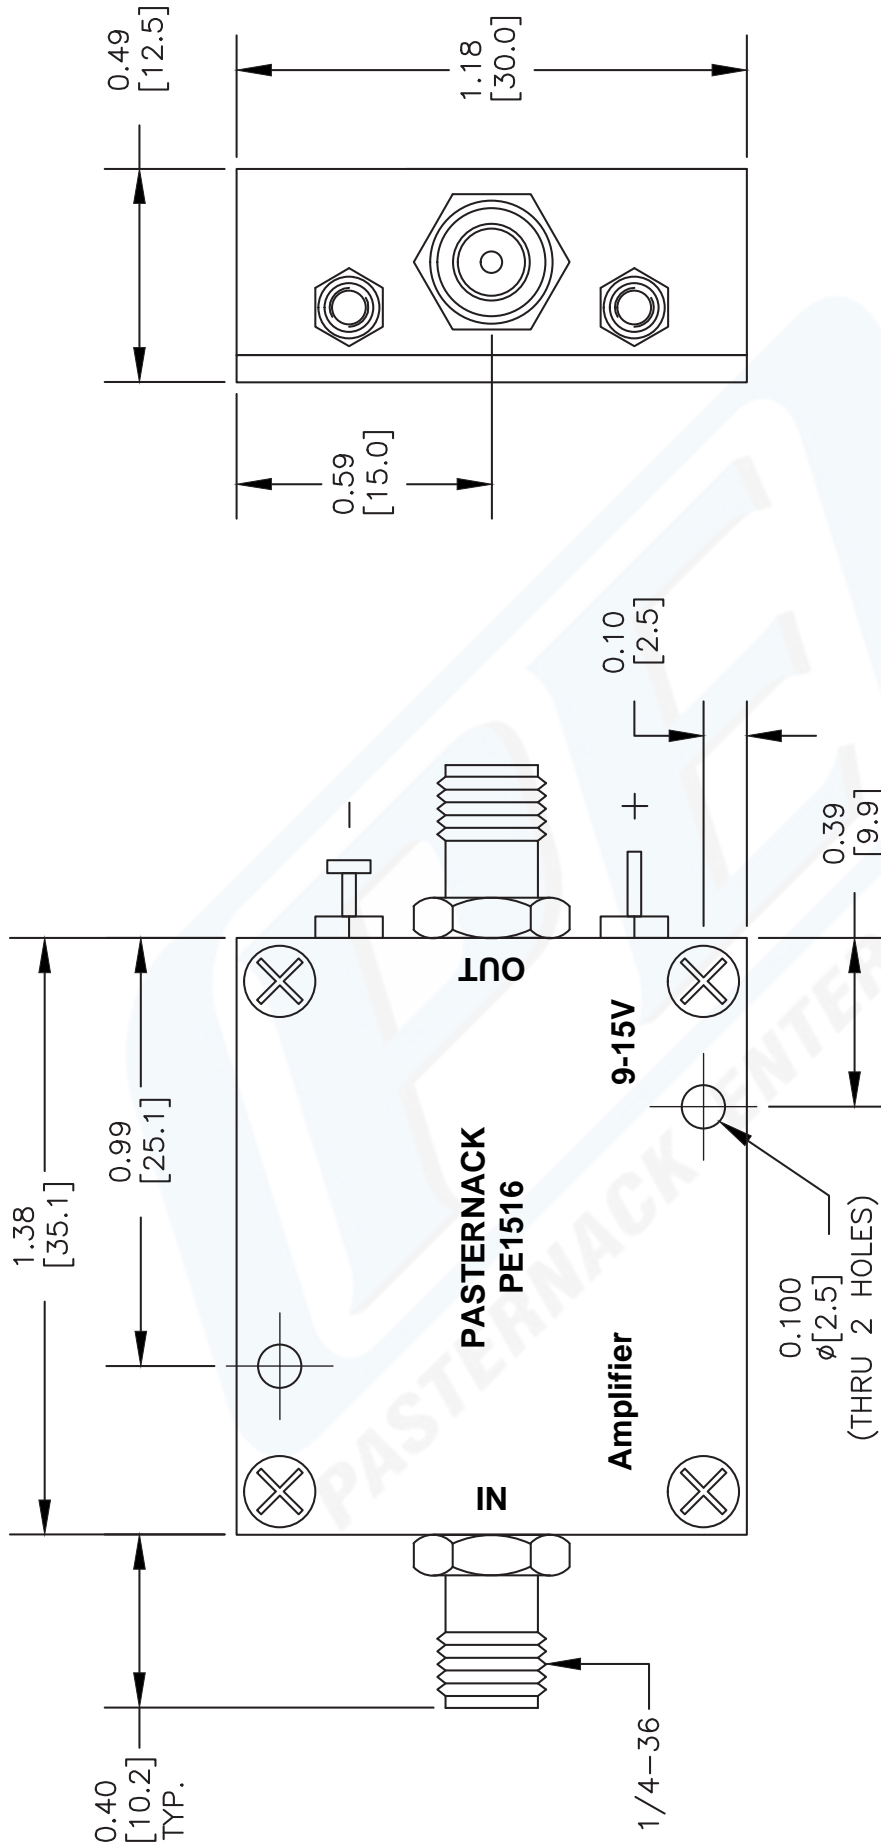

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].

DWG TITLE
PE1516

FSCM NO. 53919

127

SIZE A

SCALE N/A

CAD FILE 102610

PASTERNAK
Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | Fax: (949) 261-7451
Website: www.pasternack.com | E-Mail: sales@pasternack.com