

# Directional Coupler

50/75Ω

5 to 1000 MHz

ADC-12-7550+




## Maximum Ratings

|                                                                 |                |
|-----------------------------------------------------------------|----------------|
| Operating Temperature                                           | -40°C to 85°C  |
| Storage Temperature                                             | -55°C to 100°C |
| Permanent damage may occur if any of these limits are exceeded. |                |


## Pin Connections

|                      |   |
|----------------------|---|
| INPUT 75Ω            | 1 |
| OUTPUT 75Ω           | 6 |
| COUPLED 50Ω          | 3 |
| GROUND               | 2 |
| 50Ω TERM EXTERNAL    | 4 |
| ISOLATE (DO NOT USE) | 5 |

## Outline Drawing

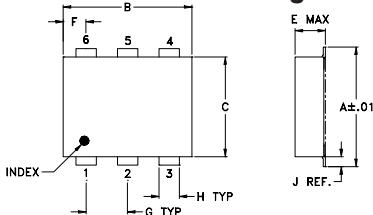

## PCB Land Pattern




## Outline Dimensions (inch/mm)

| A    | B    | C    | D    | E    | F    | G    |
|------|------|------|------|------|------|------|
| .272 | .310 | .220 | .100 | .112 | .055 | .100 |
| 6.91 | 7.87 | 5.59 | 2.54 | 2.84 | 1.40 | 2.54 |

| H    | J    | K    | L    | wt    |
|------|------|------|------|-------|
| .030 | .026 | .065 | .300 | grams |
| 0.76 | 0.66 | 1.65 | 7.62 | 0.20  |

## Demo Board MCL P/N: TB-358 Suggested PCB Layout (PL-215)

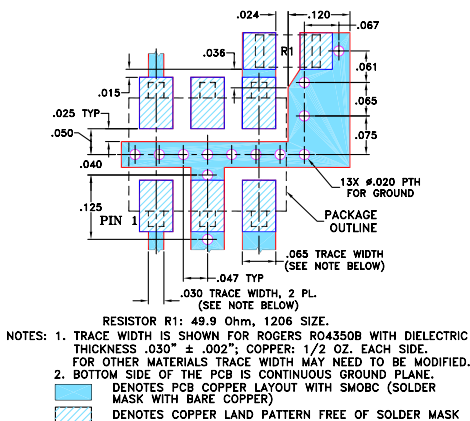

## Features

- wideband, 5-1000 MHz
- low mainline loss, 0.7 dB typ.
- excellent IN/OUT VSWR, 1.2:1 typ.
- unique circuit, 75Ω at IN/OUT and 50Ω at CPL
- aqueous washable
- protected by US Patents 6,133,525 & 6,140,887

## Applications

- CATV

CASE STYLE: CD542  
PRICE: \$6.95 ea. QTY (10)

## +RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications



Available Tape and Reel  
at no extra cost

| Reel Size | Devices/Reel              |
|-----------|---------------------------|
| 7"        | 10, 20, 50, 100, 200, 500 |
| 13"       | 500, 1000                 |

## Directional Coupler Electrical Specifications




| FREQ.<br>(MHz) | COUPLING at 50Ω<br>(dB) |          | ¹ MAINLINE LOSS at 75Ω<br>(dB) |      |      |      |      |      | DIRECTIVITY<br>(dB) |      |      | VSWR<br>(:1) | POWER<br>INPUT<br>(W) |      |     |     |
|----------------|-------------------------|----------|--------------------------------|------|------|------|------|------|---------------------|------|------|--------------|-----------------------|------|-----|-----|
|                |                         |          | L                              |      | M    |      | U    |      | L                   | M    | U    |              |                       |      |     |     |
|                | Nom.                    | Flatness | Typ.                           | Max. | Typ. | Max. | Typ. | Max. | Typ.                | Min. | Typ. | Min.         | Typ.                  | Max. |     |     |
| 5-1000         | 12.5±1.0                | ±1.0     | 0.6                            | 1.0  | 0.7  | 1.2  | 0.85 | 1.8  | 13                  | 10   | 12   | 9            | 11                    | 7    | 1.5 | 1.0 |

L= 5-50 MHz M= 50-500 MHz U= 500-1000 MHz


1. Mainline loss includes theoretical power loss at coupled port.

## Typical Performance Data

| Frequency<br>(MHz) | Mainline Loss<br>(dB)<br>In-Out | Coupling<br>(dB)<br>In-Cpl | Directivity<br>(dB) | Return Loss<br>(dB) |       |       |
|--------------------|---------------------------------|----------------------------|---------------------|---------------------|-------|-------|
|                    |                                 |                            |                     | In                  | Out   | Cpl   |
| 5.00               | 0.62                            | 12.14                      | 12.98               | 20.67               | 32.11 | 27.86 |
| 45.00              | 0.63                            | 12.16                      | 12.88               | 21.27               | 36.89 | 27.24 |
| 124.00             | 0.68                            | 12.25                      | 12.65               | 21.67               | 30.63 | 21.83 |
| 272.00             | 0.73                            | 12.44                      | 12.22               | 21.77               | 24.00 | 16.13 |
| 420.00             | 0.76                            | 12.65                      | 11.82               | 20.91               | 20.71 | 13.09 |
| 540.00             | 0.79                            | 12.79                      | 11.57               | 19.83               | 19.25 | 11.53 |
| 675.00             | 0.81                            | 12.91                      | 11.30               | 19.50               | 18.71 | 10.32 |
| 800.00             | 0.87                            | 13.02                      | 11.16               | 19.81               | 18.63 | 9.57  |
| 900.00             | 0.96                            | 13.09                      | 10.99               | 20.08               | 18.64 | 9.14  |
| 1045.00            | 1.13                            | 13.17                      | 10.58               | 19.34               | 18.34 | 8.69  |

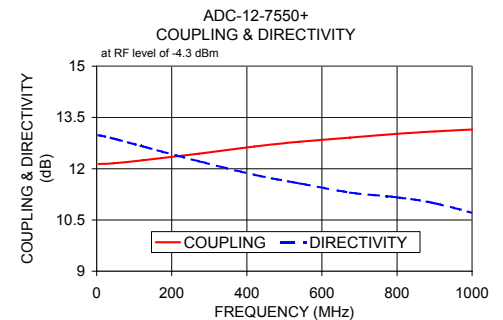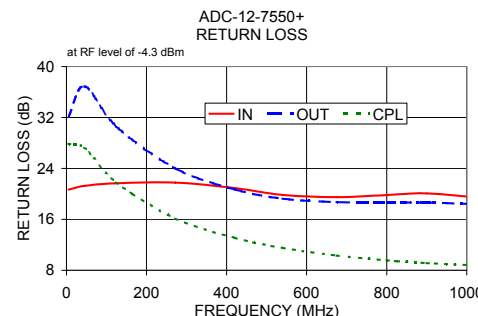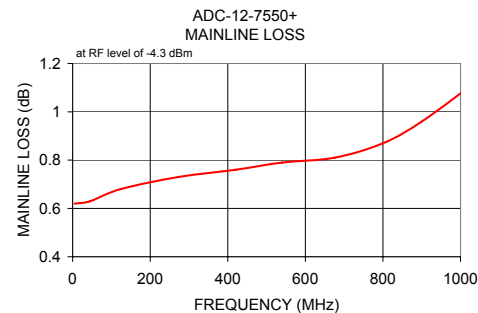

## Electrical Schematic

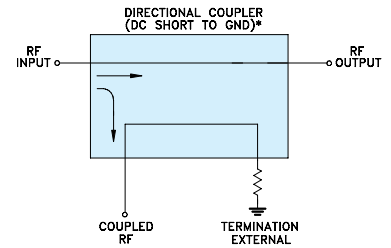

\* ELECTRICAL SCHEMATIC IS FOR DIRECTIONAL COUPLER WITH INTERNAL TRANSFORMER(S) AND EXTERNAL TERMINATION.

## Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.  
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.  
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)

