

Surface Mount Frequency Mixer

Level 13 (LO Power +13dBm) 2 to 500 MHz

LRMS-1MH+
LRMS-1MH




Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power	200mW
IF Current	40mA
Permanent damage may occur if any of these limits are exceeded.	


Pin Connections

LO	1
RF	4
IF	5
GROUND	2,3,6

Outline Drawing

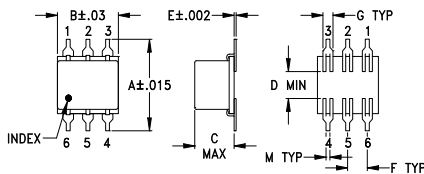

PCB Land Pattern




Outline Dimensions (inch)

A	B	C	D	E	F	G
.400	.31	.200	.10	.100	.050	
10.16	7.87	5.08	2.54	0.25	2.54	1.27

H	J	K	L	M	wt
.420	.120	.060	.100	.020	grams
10.67	3.05	1.52	2.54	0.51	0.55

Demo Board MCL P/N: TB-44+ Suggested PCB Layout (PL-083)



- NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS 0.030" ± 0.002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
3. DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
4. DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Features

- low conversion loss, 6.11 dB typ.
- excellent L-R isolation, 44 dB typ.

Applications

- VHF/UHF
- instrumentation

CASE STYLE: QQQ130
PRICE: \$8.95 ea. QTY (1-9)

+ RoHS compliant in accordance
with EU Directive (2002/95/EC)

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.

Electrical Specifications

FREQUENCY (MHz)		CONVERSION LOSS (dB)				LO-RF ISOLATION (dB)						LO-IF ISOLATION (dB)						IP3 at center band (dBm)
LO/RF	IF	Mid-Band			Total Range	L		M		U		L		M		U		
		$\overline{X}$	σ	Max.		Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Min.	
		f_L - f_U																
2-500	DC-500	6.11	.08	7.0	8.0	58	45	44	25	30	20	55	40	36	25	28	17	23

1 dB COMP.: +9 dBm typ.

L = low range [f_L to $10 f_L$]
m = mid band [$2 f_L$ to $f_U/2$]


M = mid range [$10 f_L$ to $f_U/2$]

U = upper range [$f_U/2$ to f_U]

Typical Performance Data

Frequency (MHz)		Conversion Loss (dB)	VSWR RF Port (:1)	Frequency (MHz)	Isolation L-R (dB)	Isolation L-I (dB)	VSWR LO Port (:1)
RF	LO						
		LO +13dBm	LO +13dBm		LO +13dBm	LO +13dBm	LO +13dBm
2.10	32.10	7.17	1.70	10.50	64.73	57.65	1.83
4.10	34.10	6.62	1.39	14.50	62.18	54.96	1.83
6.10	36.10	6.34	1.27	20.50	59.26	52.09	1.82
10.10	40.10	6.20	1.17	24.50	57.87	50.57	1.82
14.10	44.10	6.16	1.13	30.50	56.09	48.83	1.82
18.10	48.10	6.12	1.10	35.00	54.94	47.64	1.83
20.10	50.10	6.13	1.09	40.10	53.90	46.55	1.83
25.10	55.10	6.11	1.08	50.10	52.15	44.74	1.83
50.10	80.10	6.17	1.05	80.10	48.24	40.84	1.82
100.10	130.10	6.14	1.05	105.10	46.64	38.62	1.81
125.10	155.10	6.11	1.06	155.10	45.00	36.74	1.83
150.10	180.10	6.13	1.07	205.10	43.30	35.62	1.81
175.10	205.10	6.11	1.07	255.10	41.88	34.89	1.87
200.10	230.10	6.20	1.08	305.10	39.81	33.72	1.90
250.10	280.10	6.21	1.09	330.10	39.28	33.35	1.93
300.10	330.10	6.19	1.10	355.10	38.68	32.69	1.91
350.10	380.10	6.28	1.12	405.10	36.85	30.94	1.95
400.10	430.10	6.32	1.12	430.10	35.87	30.29	1.96
425.10	455.10	6.43	1.12	455.10	34.64	29.24	1.93
500.00	470.00	6.45	1.18	470.00	33.91	28.41	1.94

Electrical Schematic

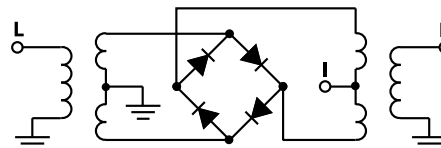

Mini-Circuits®
ISO 9001 ISO 14001 AS 9100 CERTIFIED

The Design Engineers Search Engine



Provides ACTUAL Data Instantly at minicircuits.com

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

IF/RF MICROWAVE COMPONENTS







Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

For detailed performance specs
& shopping online see web site

REV. C
M111522
LRMS-1MH
DJ/FL/CP/AM
070521
Page 1 of 2

Performance Charts

LRMS-1MH+ LRMS-1MH

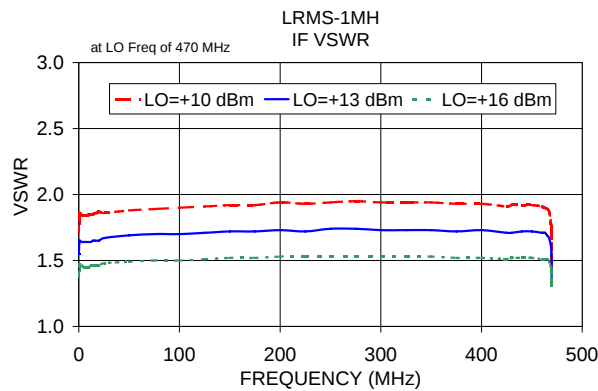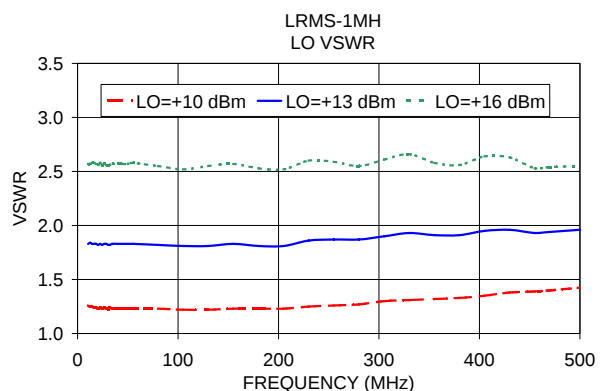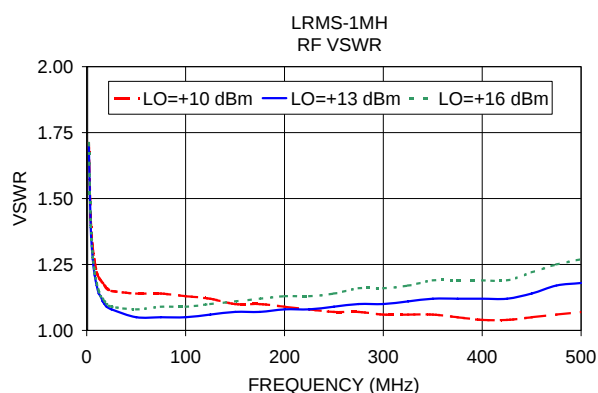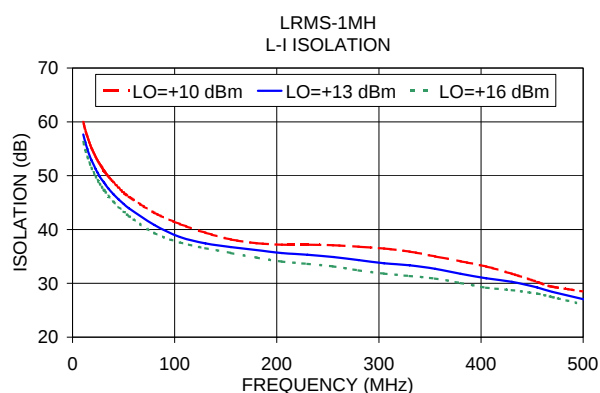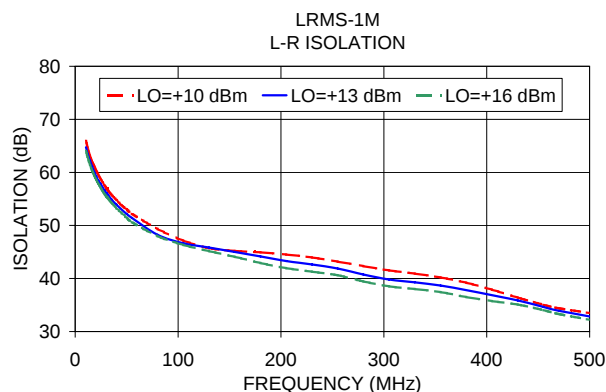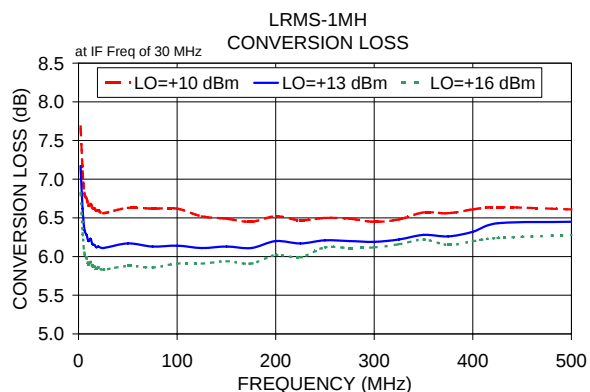

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com

IF/RF MICROWAVE COMPONENTS

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.