



Directional 35 dB N Coupler From 1 GHz  
to 11 GHz Rated To 600 Watts

TECHNICAL DATA SHEET

PE2236-35

**Directional 35 dB N Coupler From 1 GHz to 11 GHz Rated To 600 Watts**

**Configuration**

Connector 1	N Female
Connector 2	SMA Female
Connector 3	SMA Female
Design	Directional Coupler

**Electrical Specifications**

Frequency Range, GHz	1 to 11
Directivity, dB	20
Impedance, Ohms	50
Maximum Insertion Loss, dB	20
Maximum Input Power, Watts	600
Peak Power, KWatts	10
Maximum Operating Voltage, Vrms	2
Coupling Value, dB	35
Coupling Tolerance, dB	± 1.5
Frequency Sensitivity, dB	1.5

**Mechanical Specifications**

**Temperature**

Operating Range, deg C	-40 to +80
------------------------	------------

**Size**

Length, in [mm]	5.32 [135.13]
Width, in [mm]	0.8 [20.32]
Height, in [mm]	1.48 [37.59]

**Connector 1**

Type	N Female
------	----------

**Connector 2**

Type	SMA Female
------	------------

**Connector 3**

Type	SMA Female
------	------------

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Directional 35 dB N Coupler From 1 GHz to 11 GHz Rated To 600 Watts PE2236-35](#)

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.





Directional 35 dB N Coupler From 1 GHz  
to 11 GHz Rated To 600 Watts

TECHNICAL DATA SHEET

PE2236-35

**Compliance Certifications** (visit [www.Pasternack.com](http://www.Pasternack.com) for current document)

**Plotted and Other Data**

Notes:

Values at 25 °C, sea level

Directional 35 dB N Coupler From 1 GHz to 11 GHz Rated To 600 Watts from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Directional 35 dB N Coupler From 1 GHz to 11 GHz Rated To 600 Watts PE2236-35](http://www.pasternack.com/directional-35-db-n-coupler-1-11-ghz-600-watts-pe2236-35)

URL: <http://www.pasternack.com/directional-35-db-n-coupler-1-11-ghz-600-watts-pe2236-35-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.

# PE2236-35 CAD Drawing

Directional 35 dB N Coupler From 1 GHz to 11 GHz Rated To 600 Watts

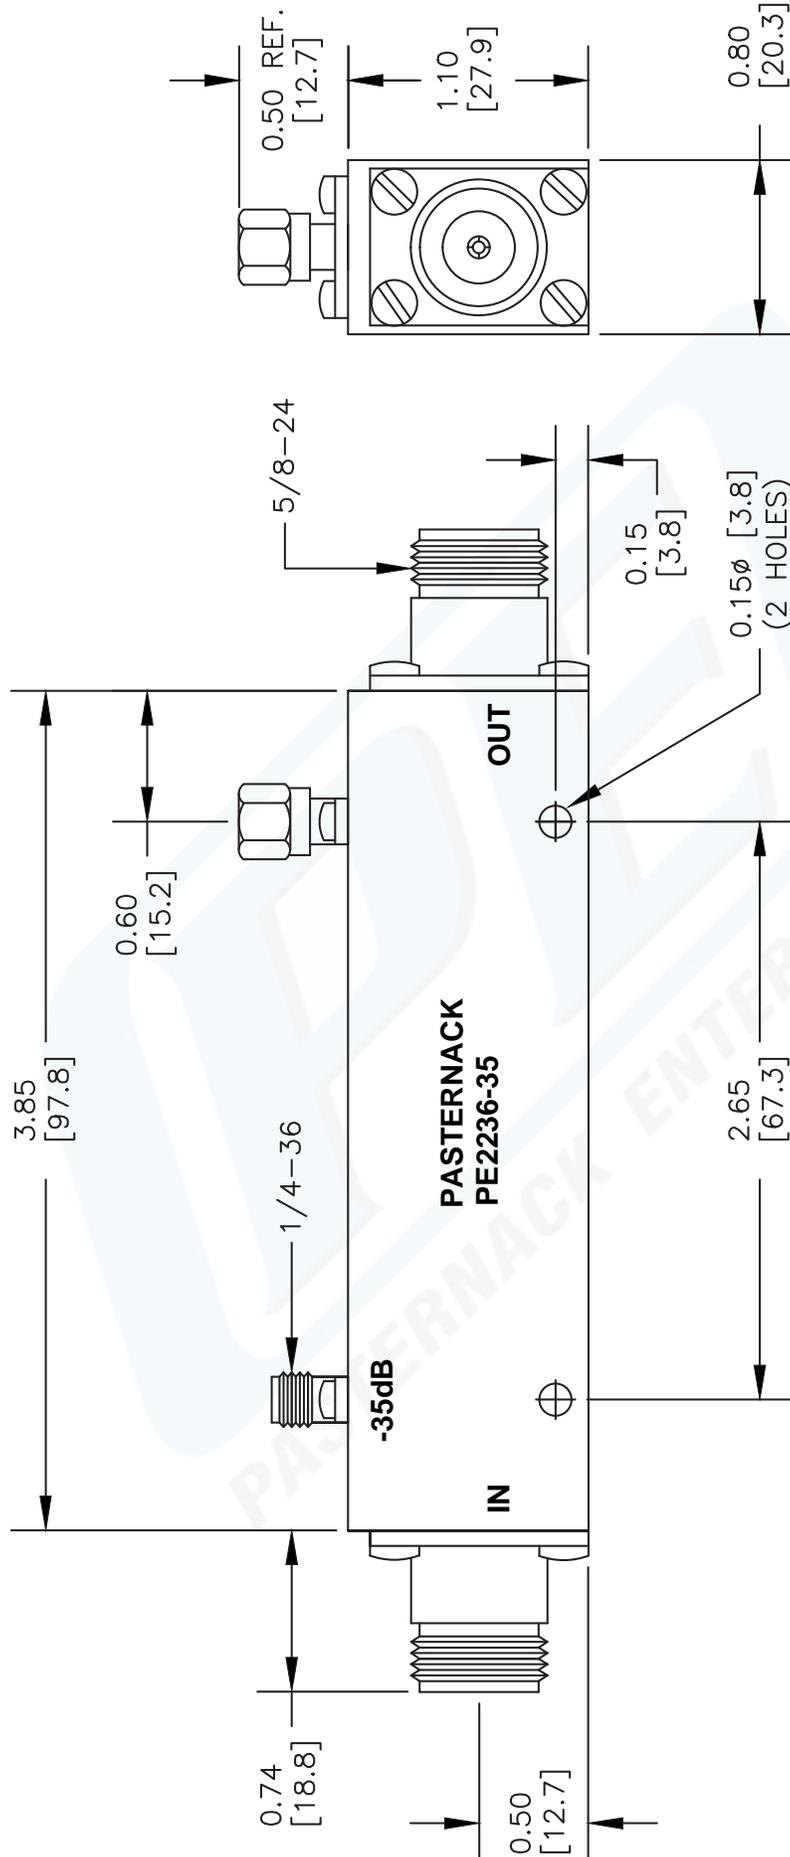

DWG TITLE

**PE2236-35**

NOTES:  
 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.  
 3. DIMENSIONS ARE IN INCHES [mm].

REV. B

FSCM NO. 53919

CAD FILE 011812

SCALE N/A

SIZE A

2233



**PASTERNAK®**  
 Pasternack Enterprises, Inc.  
 P.O. Box 16759 | Irvine | CA | 92623  
 Phone: (949) 261-1920 | Fax: (949) 261-7451  
 Website: www.pasternack.com | E-Mail: sales@pasternack.com