




RF-LAMBDA

The power beyond expectations

0.5--4.0GHz PIN SP2T

Absorptive and Reflective 0.5--4.0GHz Coaxial SP2T

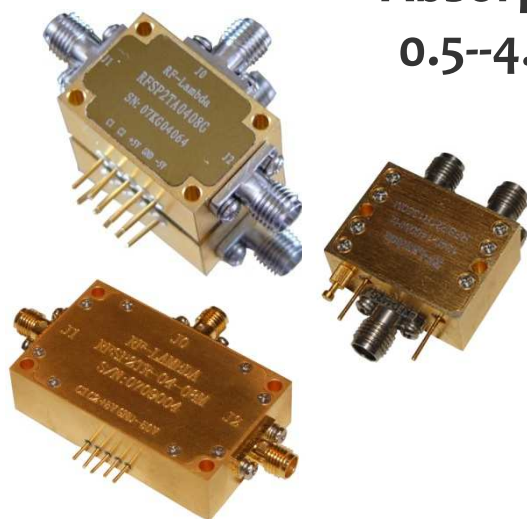

Features

- Wide Band Operation 0.5--4.0GHz
- High Power Handle Capability up to 50W upon request.
- TTL compatible driver include
- Fast Switching Speed
- Low Insertion Loss and High Isolation
- Temperature Range -40°C~+85°C
- Customization available upon request

Absorptive SP2T- Single Pole Double Throw						
Part Number	Frequency (GHz)	Insert. Loss (dB)	VSWR (Max:1)	Isolation min (dB)	Avg. Power (Watts)	Switching Speed (ns)
RFSP2TA0004G	0.5~4.0	1.60	1.50	60	1~5	50~100
Reflective SP2T- Single Pole Double Throw						
Part Number	Frequency (GHz)	Insert. Loss (dB)	VSWR (Max:1)	Isolation min (dB)	Avg. Power (Watts)	Switching Speed (ns)
RFSP2TR0004G	0.5~4.0	1.40	1.50	60	1~50	100~500

Mechanical Specification

Case Style: W201, W202, W203 type.
Finishing: Gold plating for brass material
Other finishing available
Connector: SMA-F Per MIL-C-39012
Control PIN: 0.02" dia x 0.15" solder pins
Weight: 20 grams max.
Mounting: (4) 0.1" dia through holes

Electrical Operation

DC Biasing:
+5.0V (+/-0.5V 30mA max.)
-5.0V (+/-0.5V 30mA max.)
High Voltage Biasing is required for high RF power model.

TTL Logic Control:

C1	C2	
0	0	OFF
0	1	J0->J1
1	0	J0->J2

Power Handle: 0.2W~50W (upon request)

Absorptive / Reflective Coaxial Single Pole Double Throw Switch 0.5--4.0GHz






RF-LAMBDA

The power beyond expectations

0.5~4.0GHz PIN SP2T

Absorptive / Reflective Coaxial Single Pole Double Throw Switch 0.5~4.0GHz

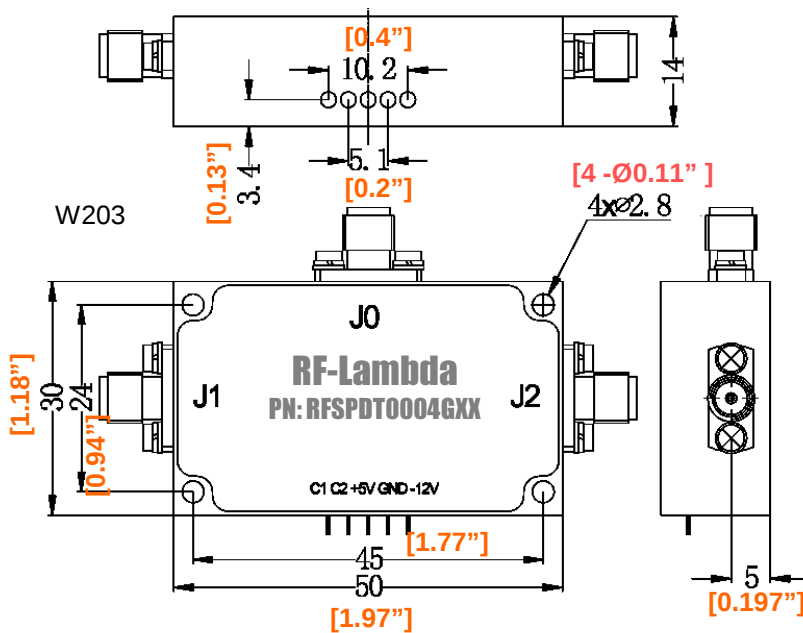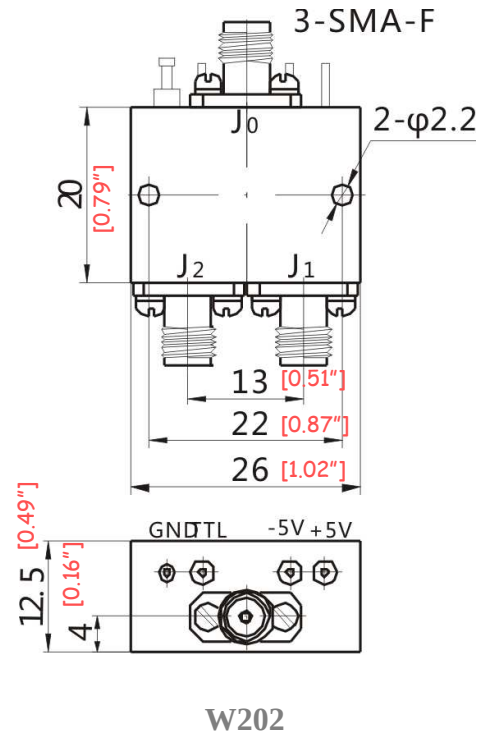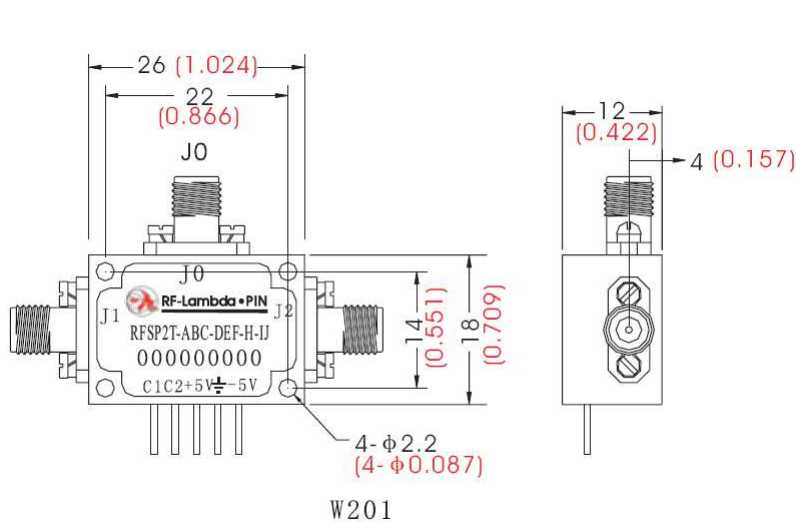

Note: Contact RF-Lambda for faster switching speed, higher power handle, higher isolation

1.Higher power handle capability will give lower isolation , higher biasing current and slower switching speed.

2.Narrower frequency band will improve insertion loss and isolation.



RF-LAMBDA

The power beyond expectations

0.5--4.0GHz PIN SP2T

Absorptive / Reflective Coaxial Single Pole Double Throw Switch 0.5--4.0GHz

