

VFOV405


OCXO - Ultra Miniature, Ultra Low Power

HCMOS



Features

- 5MHz to 100MHz frequency range
- Industry's smallest OCXO
- Fast warm-up
- Eco-friendly 120mW power consumption
- HCMOS output
- Vibration resistant construction



Applications

- PLL Reference for Telecommunication Systems
- Portable (Battery Operated) Devices
- Guidance Systems
- Instrumentation / Test and Measurement

Electrical Specifications

Parameter	Symbol	Condition	Min	Typ	Max	Unit	Note
Frequency Range	F		5		100	MHz	
Frequency Stability	$\Delta F/F$	Vs. Operating temperature E: -30°C to +70°C		± 50		ppb	STD option shown. See "How to Order" Chart below
		Vs. Supply voltage		± 2		ppb	Ref. V _{CC} typ.
		Vs. Aging / Day Vs. Aging / Year			± 0.5 ± 0.05	ppb ppm	After 30 days. Enhanced option shown. See "How to Order" chart
Operating Temperature Range	T		-40°		+85°	°C	STD option shown. See "How to Order" chart
Allan Variance		1s		20E ⁻¹²			
SSB Phase Noise		1Hz 10Hz 100Hz 1kHz 10kHz		-90 -125 -145 -155 -165		dBc/Hz	For 10MHz oscillator
Retrace		After 30 min.			± 20	ppb	
G-Sensitivity		worst direction			± 1	ppb/g	
Supply Voltage	V _{CC}		4.75 3.14	5.0 3.3	5.25 3.46	V	
Power Consumption	P	steady state, 25°C start-up		0.12 0.7	0.22 1.2	W	
Warm Up Time	τ	to 0.1ppm accuracy from +25°C		60	90	sec	Note 1

*Note 1: Warm up time is affected by input voltage, initial accuracy, frequency, aging and other conditions.



VFOV405

OCXO - Ultra Miniature, Ultra Low Power

HCMOS



Electrical Specifications

Parameter	Symbol	Condition	Min	Typ	Max	Unit	Note
HCMOS / TTL Output Levels		HCMOS/TTL	10kOhms // 15pF				Order Code H
	V _H	V _{CC} =5V V _{CC} =3.3V	3.9 2.4			V	
	V _L				0.4	V	
Rise / Fall time	T _R /T _F	At 10MHz			10	ns	
Duty Cycle			45		55	%	
Control Voltage	V _C	V _{CC} =5V V _{CC} =3.3V	0 0		4.3 2.8	V	
Pull Range		from nominal F	±0.5	±1		ppm	
Deviation slope		Monotonic, Positive		0.6 0.45		ppm/V	V _{CC} = 3.3V V _{CC} = 5V
Reference output	V _{REF}	V _{CC} =5V V _{CC} =3.3V	4.05 2.70	4.20 2.80	4.35 2.90	V	

Absolute Maximum Ratings

Parameter	Symbol	Condition	Min	Typ	Max	Unit	Note
Supply Break Down Voltage	V _{CC}		-0.5		V _{CC} +20%	V	
Control Voltage	V _C		-1		9	V	

Environmental and Mechanical Conditions

Parameter	Condition
Storage Temperature	-60°C to +90°C
Humidity	Non-condensing, 95%
Mechanical Shock	Per MIL-STD-202, 30g, half sine, 11ms
Vibration	Per MIL-STD-202, 10g swept Sine to 2000Hz
Soldering Conditions	260°C for 10s. Hand solder only – not reflow compatible
Markings	Epoxy ink or laser engraved




VFOV405

OCXO - Ultra Miniature, Ultra Low Power

HCMOS



How to Order

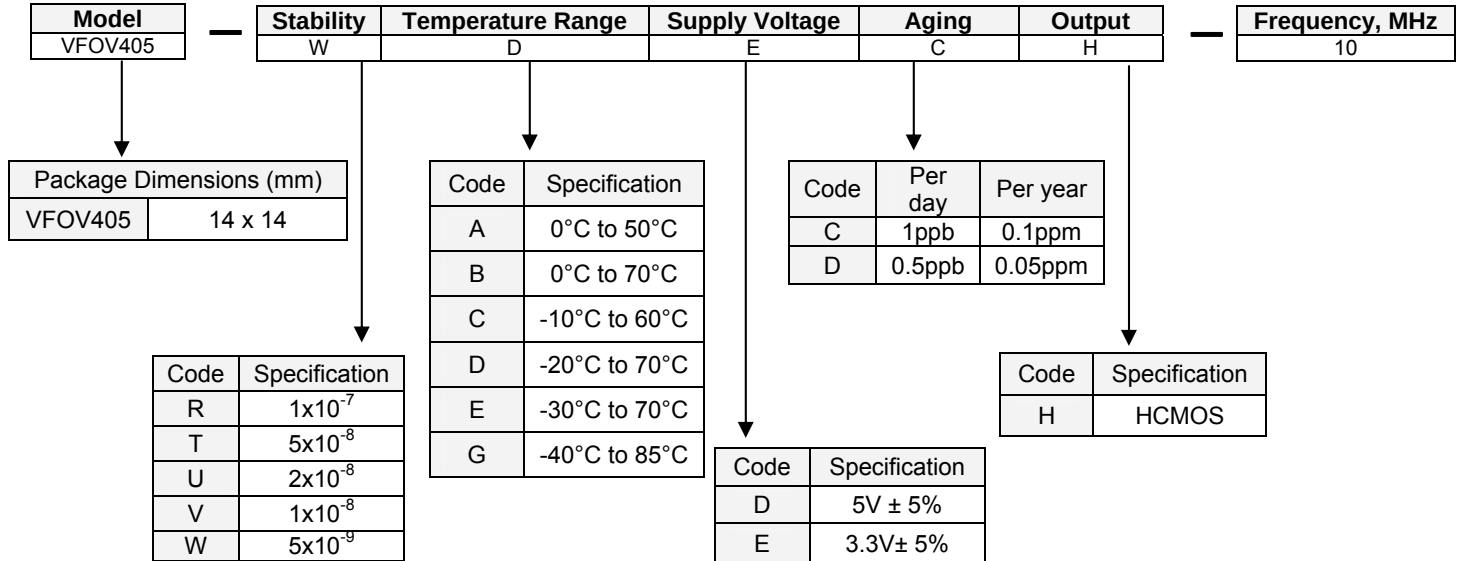

Available Frequency Stabilities over Operating Temperature Ranges

Order Code	Temperature Range	Stability				
		1x10 ⁻⁷	5x10 ⁻⁸	2x10 ⁻⁸	1x10 ⁻⁸	5x10 ⁻⁹
A	0°C to 50°C	*	*	*	*	◇
B	0°C to 70°C	*	*	*	◇	
C	-10°C to 60°C	*	*	*	◇	◇
D	-20°C to 70°C	*	*	*		
E	-30°C to 70°C	*	*	*		
G	-40°C to 85°C	*	◇	◇		

◇ Only available below 30MHz

VFOV405

OCXO - Ultra Miniature, Ultra Low Power

HCMOS

Package

