

Surface Mount RF Transformer

50Ω 0.15 to 350 MHz

TC1-6X+
Upgraded Version*

TC1-6+





Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power	0.25W
DC Current	30mA
Permanent damage may occur if any of these limits are exceeded.	

Pin Connections

PRIMARY DOT	6
PRIMARY	4
SECONDARY DOT	1
SECONDARY	3
NOT USED	2

Outline Drawing AT224-1

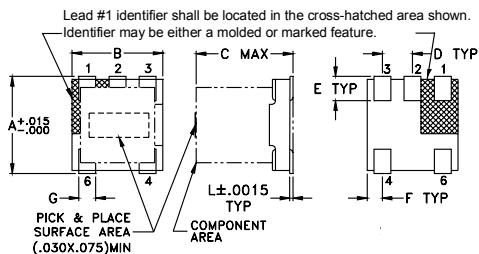


Outline Dimensions (inch mm)

A	B	C	D	E	F
.150	.150	.160	.050	.040	.025
3.81	3.81	4.06	1.27	1.02	0.64

G	H	J	K	L	wt
.028	.065	.190	.030	.007	grams
0.71	1.65	4.83	0.76	0.18	0.15

Demo Board MCL P/N: TB-145 Suggested PCB Layout (PL-244)



Features

- good return loss
- usable over 0.05-400 MHz
- excellent amplitude unbalance, 0.1 dB typ.
- and phase unbalance, 2 deg typ. in 1 dB bandwidth
- plastic base with leads

Applications

- balanced to unbalanced transformation
- push-pull amplifiers

CASE STYLE: AT224-1
PRICE: \$1.99 ea. QTY (20)
\$1.69 ea. QTY (100)

*Addition of Top hat™ feature
Benefits

- Allows faster pick-and-place
- Enables visual identification marking

+RoHS Compliant


The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Electrical Specifications

Ω RATIO	FREQUENCY (MHz)	INSERTION LOSS*		
		3 dB MHz	2 dB MHz	1 dB MHz
1	0.15-350	0.15-350	0.25-250	0.3-125

* Insertion Loss is referenced to mid-band loss, 0.2 dB typ.


Config. C



Available Tape and Reel at no extra cost
Real Size Devices/Reel
7" 20, 50, 100, 200, 500
13" 1000, 2000

Typical Performance Data

FREQUENCY (MHz)	INSERTION LOSS (dB)	INPUT R. LOSS (dB)
0.15	0.73	12.89
0.25	0.61	16.56
0.30	0.57	17.77
0.50	0.44	23.21
2.00	0.31	30.49
10.00	0.26	33.62
50.00	0.35	24.13
125.00	0.61	16.90
250.00	1.31	11.59
350.00	2.16	9.26

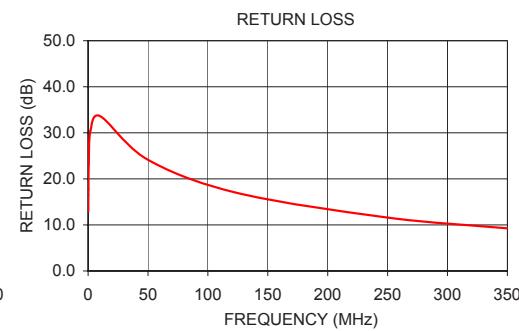

NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS 4350B WITH DIELECTRIC THICKNESS .020" ± .0015"; COPPER: 1/2 OZ. ON EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED. 2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE. 3. THIS PAD IS NOT REQUIRED FOR AT224 CASE STYLE.

■ DENOTES PCB COPPER LAYOUT WITH SWOBC (SOLDER MASK OVER BARE COPPER)
■ DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

Mini-Circuits®

www.minicircuits.com P.O. Box 35166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com