
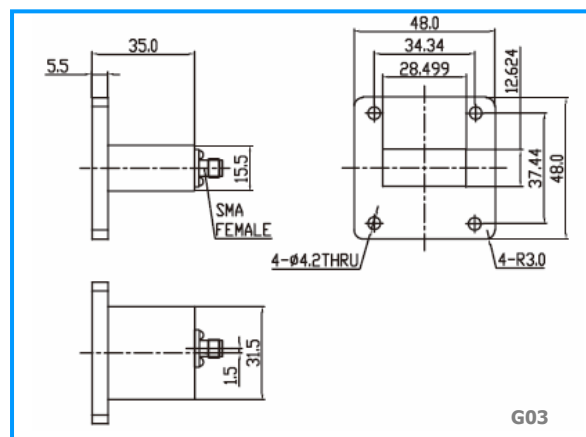
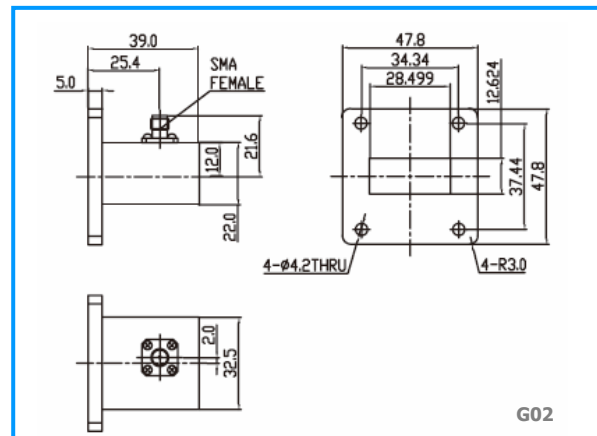


WAVEGUIDE TO COAXIAL ADAPTORS

Available online ex-stock @ www.meslmicrowave.com

Frequency Range (GHz)	MESL Type Number	Insertion Loss (dB Max)	VSWR (Max)	Operation Temperature °C	Waveguide Type	Connector Type	Direction	Package Code
5.7-6.7	14U 10445	0.1	1.2	-40~+85	WR137	SMA Female	Straight	G01
7.05-10.0	15U 10446	0.1	1.2	-40~+85	WR112	SMA Female	Right Angled	G02
9.0-10.0	15U 10447	0.1	1.2	-40~+85	WR112	SMA Female	Straight	G03
10.0-11.0	16U 10448	0.1	1.2	-40~+85	WR90	SMA Female	Straight	G04
8.2-12.4	16U 10449	0.1	1.2	-40~+85	WR90	SMA Female	Right Angled	G05
10.5-11.5	17U 10450	0.1	1.2	-40~+85	WR75	SMA Female	Straight	G06
10.0-15.0	17U 10451	0.1	1.2	-40~+85	WR75	SMA Female	Right Angled	G07
12.0-18.0	18U 10452	0.1	1.2	-40~+85	WR62	SMA Female	Right Angled	G08
18.0-26.0	20U 10453	0.1	1.2	-40~+85	WR42	SMA Female	Right Angled	G09

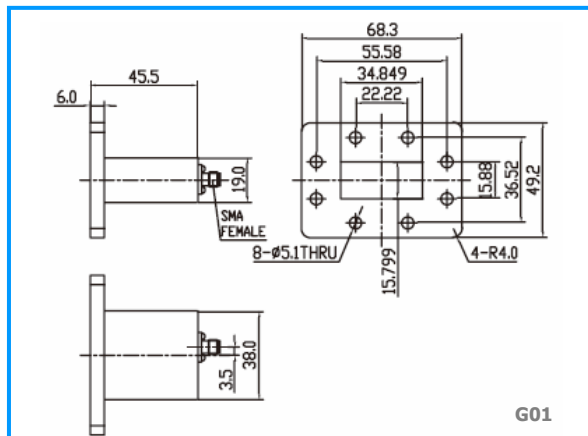

Note: All Dimensions are in mm

This publication is issued for outline information purposes only. MESL Microwave Ltd reserves full rights to amend the specification.







MESL Product Range also includes:

- Ferrite components
- Filters, Diplexers and Couplers
- SAW Pulse Compression Systems
- High Power Waveguide Subsystems
- Active Microwave Subsystems

Tel: +44 (0)131 333 2000
 Fax: +44 (0)131 333 3607
 Email: Sales@meslmicrowave.com
 Web: www.meslmicrowave.com

WAVEGUIDE TO COAXIAL ADAPTORS

Available online ex-stock @ www.meslmicrowave.com

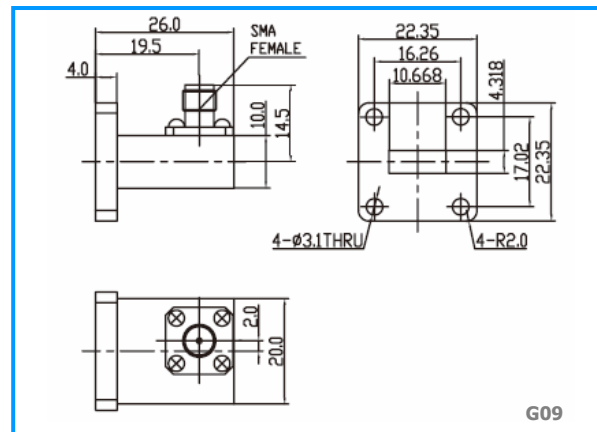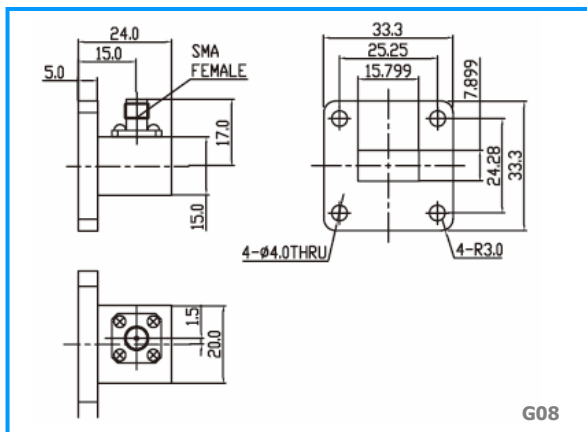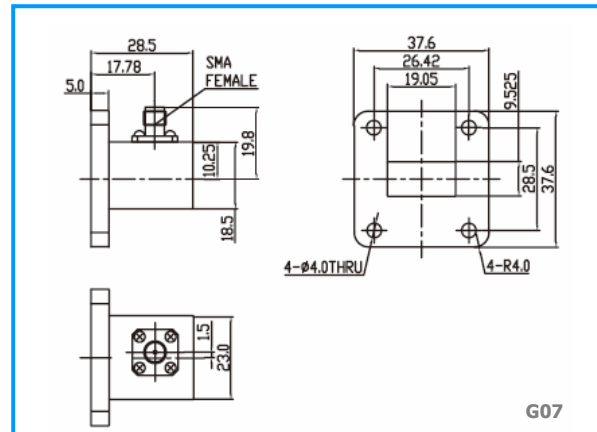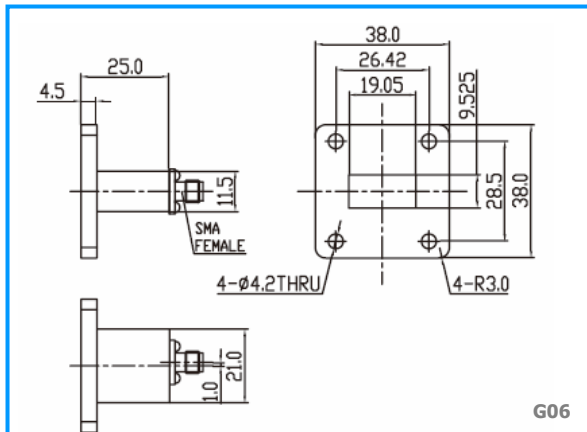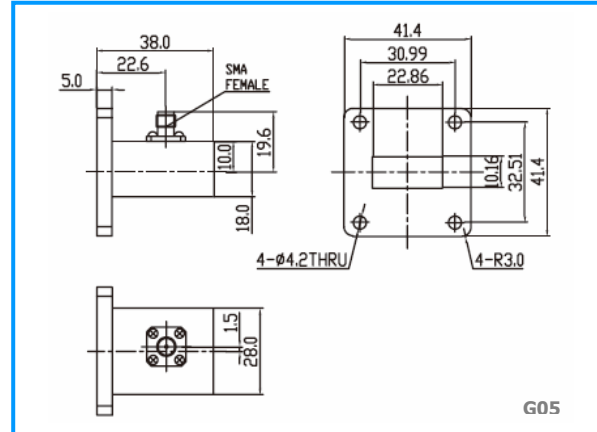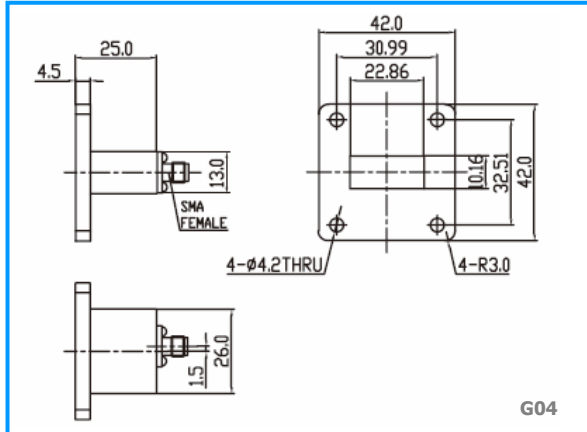

Note: All Dimensions are in mm
This publication is issued for outline information purposes only. MESL Microwave Ltd reserves full rights to amend the specification.

MESL Product Range also includes:

- Ferrite components
- Filters, Diplexers and Couplers
- SAW Pulse Compression Systems
- High Power Waveguide Subsystems
- Active Microwave Subsystems

Tel: +44 (0)131 333 2000
Fax: +44 (0)131 333 3607
Email: Sales@meslmicrowave.com
Web: www.meslmicrowave.com