



5300 Beethoven Street, Los Angeles, CA 90066  
 TEL: (310)306-5556 • FAX: (310)821-7413  
 WEB: www.ophirrf.com • E-MAIL: sales@ophirrf.com

## MODEL 5233

**0.8 - 2.5 GHz**  
**300 WATTS**  
**LINEAR POWER RF AMPLIFIER**

### Solid State Broadband High Power RF Amplifier

The 5155 is a 300 Watt broadband amplifier that covers the 0.8 – 2.5 GHz frequency range. This small and lightweight amplifier utilizes Class A/AB linear power devices that provide an excellent 3<sup>rd</sup> order intercept point, high gain, and a wide dynamic range.


Due to robust engineering and employment of the most advanced devices and components, this amplifier achieves high efficiency operation with proven reliability.

	Parameter	Specification @ 25° C
<b><u>Electrical</u></b>		
1	Frequency Range	0.8 – 2.5 GHz
2	Saturated Output Power	300 Watts min
3	Power Output @ 1dB Comp.	250 Watts min
4	Small Signal Gain	+56 dB min
5	Small Signal Gain Flatness	+/- 3 dB max with no ALC +/- 1 dB max with internal leveling
6	IP <sub>3</sub>	+60 dBm typical
7	Input VSWR	2:1 max
8	Harmonics	-20 dBc typical @ 300 Watts
9	Spurious Signals	< -60 dBc typical @ 300 Watts
10	Input/Output Impedance	50 Ohms nominal
11	AC Input Power	2800 Watts max
12	AC Input	180 – 264 VAC, single phase
13	RF Input	+10 dBm max
14	RF Input Signal Format	CW/AM/FM/PM/Pulse
15	Class of Operation	A/AB
<b><u>Mechanical</u></b>		
16	Dimensions	19" x 14" x 26"
17	Weight	150 lb. max
18	Connectors	Type-N
19	Grounding	Chassis
20	Cooling	Internal Forced Air
<b><u>Environmental</u></b>		
21	Operating Temperature	0° C to +50° C
22	Operating Humidity	95% Non-condensing
23	Operating Altitude	Up to 10,000' Above Sea Level
24	Shock and Vibration	Normal Truck Transport

Specifications subject to change without notice

### ORDERING MODELS

- ◇ RE - Rear Panel model with RS232, IEEE, & with Ethernet Interface
- ◇ FE - Front Panel model with RS232, IEEE, & with Ethernet Interface

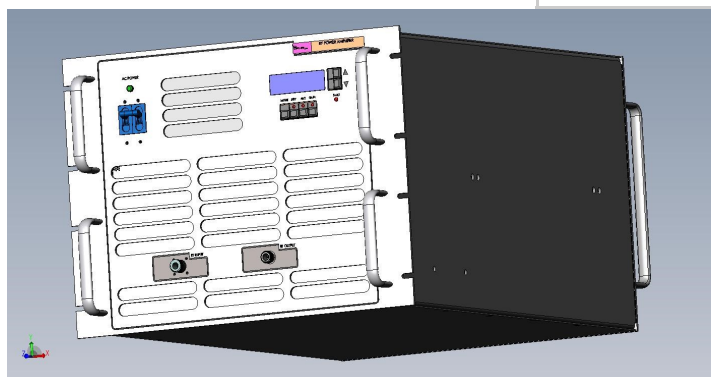



5300 Beethoven Street, Los Angeles, CA 90066  
TEL: (310)306-5556 • FAX: (310)821-7413  
WEB: www.ophirrf.com • E-MAIL: sales@ophirrf.com

## MODEL 5233

0.8 - 2.5 GHz  
300 WATTS  
LINEAR POWER RF AMPLIFIER

### FRONT PANEL CONTROLLER FEATURES

- ◇ Forward Power Monitoring
- ◇ Reflected Power Monitoring
- ◇ Gain Control (Continuously Variable VVA 20dB)
- ◇ Fault Status
- ◇ Full Protection Of any VSWR Condition, Open or Short, into any Phase Angle
- ◇ Remote Control Access via the Ethernet, RS-232, or IEEE-488 Communications ports
- ◇ Integrated Automatic Leveling Control to allow end-user to maintain output even with variances in temperature, phase or input RF level
- ◇ Standby/Enable Control
- ◇ Front Panel Display for easy viewing of System Status Locally
- ◇ Keypad buttons for full local control

### CIRCUIT CONTROL *(WITH FRONT PANEL CONTROLLER)*

- ◇ Standby (amplifier disable)
- ◇ Gain/power setting with 20dB range
- ◇ VSWR protection Reset
- ◇ ALC On/ Off

### CIRCUIT INDICATIONS *(WITH FRONT PANEL CONTROLLER)*

- ◇ Forward Power
- ◇ Reflected power
- ◇ VSWR Fault
- ◇ Temp Fault
- ◇ Gain Setting (VVA) percentage

### CIRCUIT PROTECTIONS

- ◇ Thermal Overload
- ◇ Over Current
- ◇ Over Voltage
- ◇ Open or Short VSWR Conditions *(With Front Panel Controller)*

### RFPA SYSTEM OPTIONS

- ◇ Switched Filter Bank
- ◇ Input Power Requirements
- ◇ Ruggedized Version
- ◇ Cabinet Requirements
- ◇ Outdoor Version
- ◇ Sample Ports
- ◇ Racking Options
- ◇ Many More!
- ◇ **Consult Factory with Specific Requirements**

