

Surface Mount Directional Coupler

50Ω 5 to 400 MHz

JDC-6-1+
JDC-6-1


Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
Permanent damage may occur if any of these limits are exceeded.	

Pin Connections

INPUT	1
OUTPUT	6
COUPLED	3
GROUND	2,5
ISOLATE (DO NOT USE)	4

Outline Drawing

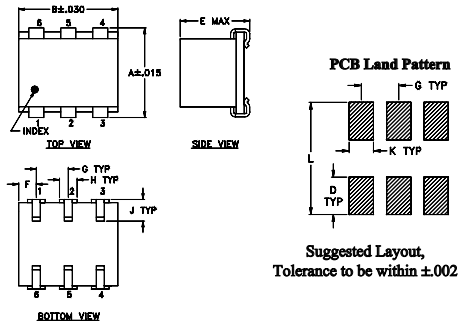


Outline Dimensions (inch mm)

A	B	C	D	E	F	G
.280	.310	—	.100	.225	.055	.100
7.11	7.87	—	2.54	5.72	1.40	2.54

H	J	K	L	wt
.047	.065	.065	.300	grams
1.19	1.65	1.65	7.62	0.45

Demo Board MCL P/N: TB-185 Suggested PCB Layout (PL-046)

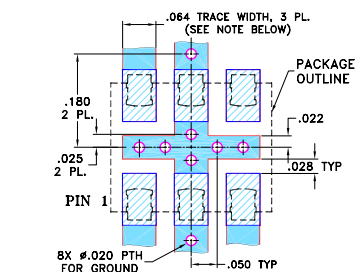

- NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
3. DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
4. DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

Features

- wideband, 5 to 400 MHz
- low mainline loss, 1.7 dB typ.
- high directivity, 25 dB typ.
- good VSWR, 1.25 typ.
- excellent solderability

Applications

- communications
- VHF/UHF



CASE STYLE: BH292
PRICE: \$ 13.60 ea. QTY (25-49)

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Directional Coupler Electrical Specifications




FREQ. (MHz)	COUPLING (dB)		MAINLINE LOSS ¹ (dB)						DIRECTIVITY (dB)						VSWR (:1)	POWER INPUT, W	
			L		M		U		L		M		U			L	MU
	Nom.	Flatness	Typ.	Max.	Typ.	Max.	Typ.	Max.	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.		
5-400	6.5±0.5	±0.5	1.6	2.0	1.7	2.4	2.0	2.4	35	30	25	20	20	15	1.25	0.5	0.5

L = 5-40 MHz M = 40-200 MHz U = 200-400 MHz


1. Mainline loss includes theoretical power loss at coupled port.

Typical Performance Data

Frequency (MHz)	Mainline Loss (dB) In-Out	Coupling (dB) In-Cpl	Directivity (dB)	Return Loss (dB)		
				In	Out	Cpl
5.00	1.58	6.15	38.87	15.68	16.95	17.56
23.00	1.62	6.15	37.15	15.87	16.85	17.48
41.00	1.67	6.14	34.77	15.99	16.83	17.50
62.00	1.66	6.20	32.17	16.15	16.81	17.52
92.00	1.66	6.22	29.29	16.44	16.80	17.58
152.00	1.72	6.27	25.25	17.21	16.85	17.82
210.00	1.84	6.24	22.81	18.27	16.96	18.17
265.00	1.86	6.29	21.09	19.62	17.11	18.64
340.00	1.98	6.42	19.22	22.31	17.25	19.47
400.00	2.09	6.41	18.19	25.59	17.25	20.20

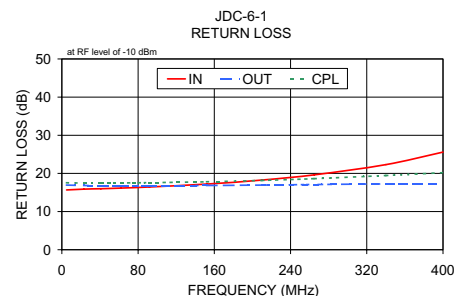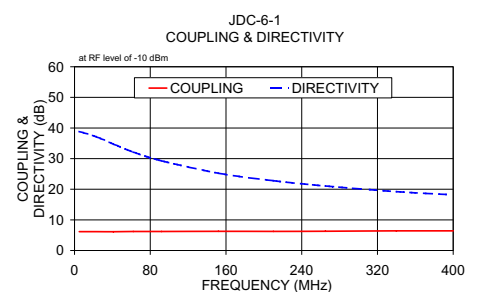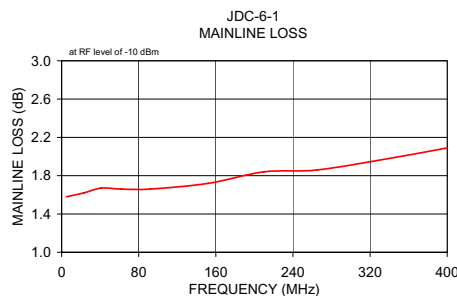

Electrical Schematic

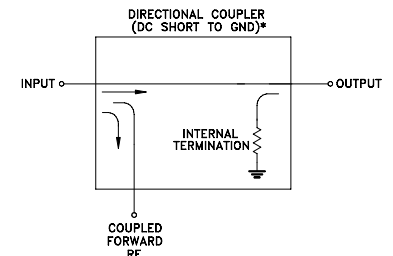

* ELECTRICAL SCHEMATIC IS FOR DIRECTIONAL COUPLER WITH INTERNAL TRANSFORMER(S) THAT ROUTES DC FROM RF PORTS TO GROUND.



www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. D
M119986
ED-4656/2
JDC-6-1
WZ/TD/CP/AM
120914