



**50 Ohm 0.5 Watts Beryllium Copper SMP  
Female RF Load Up To 18 GHz**

**TECHNICAL DATA SHEET**

**PE6183**

**50 Ohm 0.5 Watts Beryllium Copper SMP Female RF Load Up To 18 GHz**

**Configuration**

Connector	SMP Female
Connector Specification	Desc 94007
Connection Method	Push-On
Body Style	Straight

**Electrical Specifications**

Frequency Range, GHz	DC to 18
Impedance, Ohms	50
Maximum VSWR	1.35:1
Maximum Input Power, Watts	0.5

**Mechanical Specifications**

**Temperature**

Operating Range, deg C	-55 to +125
------------------------	-------------

**Size**

Length, in [mm]	0.5 [12.7]
Width/Dia., in [mm]	0.189 [4.8]

**Connector**

Type	SMP Female
Inner Conductor Material and Plating	Beryllium Copper, Gold
Inner Conductor Plating Specification	MIL-G-45204, Type 1, Grade C, Class 1
Outer Conductor Material and Plating	Beryllium Copper, Gold
Outer Conductor Plating Specification	MIL-G-45204, Type 1, Grade C, Class 1
Body Material and Plating	Beryllium Copper, Gold
Body Plating Specification	MIL-G-45204, Type 1, Grade C, Class 1
Dielectric Type	PTFE

**Compliance Certifications** (visit [www.Pasternack.com](http://www.Pasternack.com) for current document)

RoHS Compliant	Yes
----------------	-----

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [50 Ohm 0.5 Watts Beryllium Copper SMP Female RF Load Up To 18 GHz PE6183](#)

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.



50 Ohm 0.5 Watts Beryllium Copper SMP  
Female RF Load Up To 18 GHz

TECHNICAL DATA SHEET

PE6183

**Plotted and Other Data**

Notes:

Values at 25 °C, sea level

50 Ohm 0.5 Watts Beryllium Copper SMP Female RF Load Up To 18 GHz from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [50 Ohm 0.5 Watts Beryllium Copper SMP Female RF Load Up To 18 GHz PE6183](http://www.pasternack.com/0.5-watts-smp-female-rf-load-up-to-18-ghz-pe6183-p.aspx)

URL: <http://www.pasternack.com/0.5-watts-smp-female-rf-load-up-to-18-ghz-pe6183-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.

PE6183 CAD Drawing

50 Ohm 0.5 Watts Beryllium Copper SMP Female RF Load Up To 18 GHz

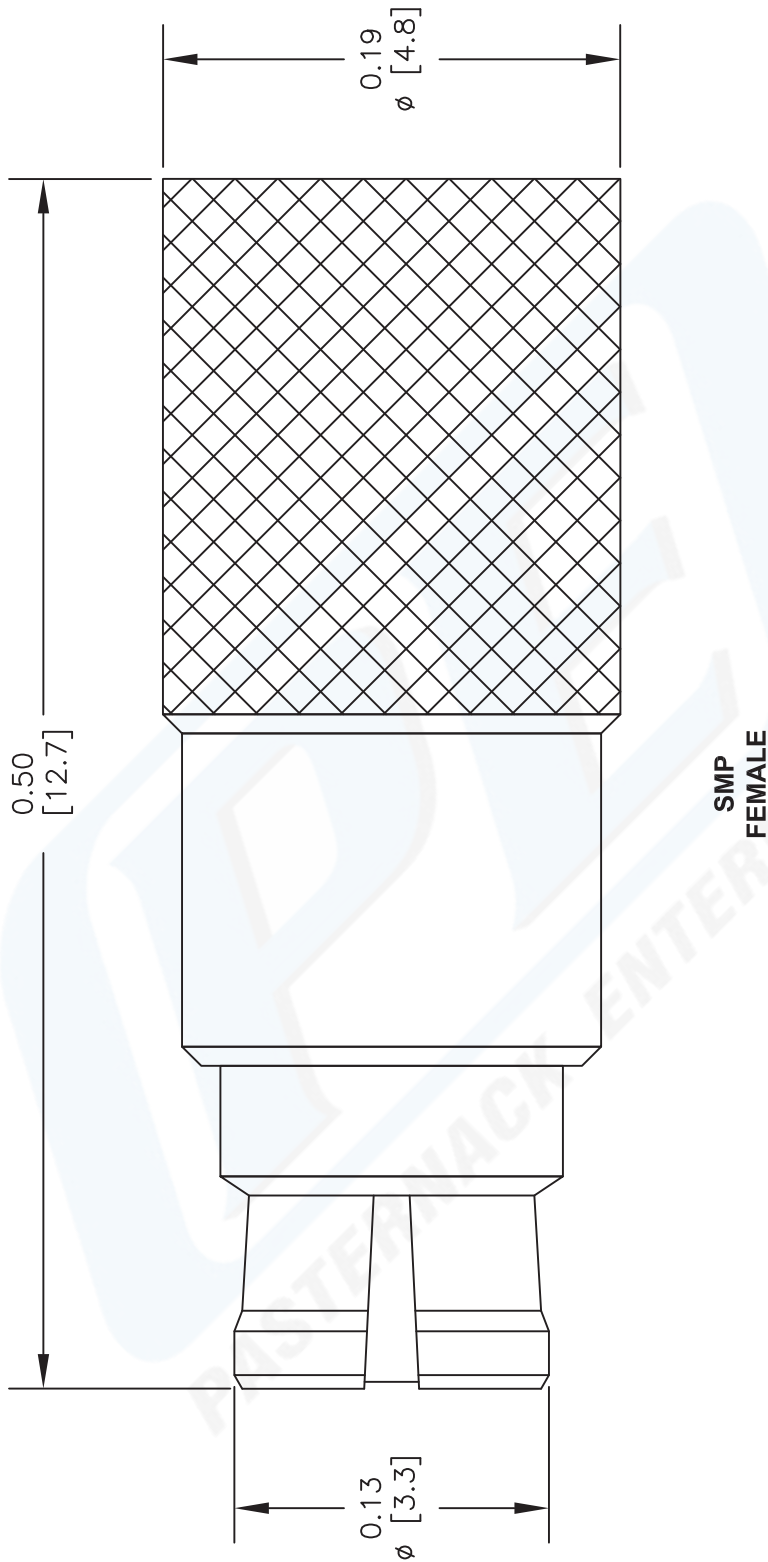

NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].			
CAD FILE	021213	SCALE	N/A
SIZE	A		2233

DWG TITLE <b>PE6183</b>	
FSCM NO.	53919

**PASTERNAK®**  
Pasternack Enterprises, Inc.  
P.O. Box 16759 | Irvine | CA | 92623  
Phone: (949) 261-1920 | Fax: (949) 261-7451  
Website: [www.pasternack.com](http://www.pasternack.com) | E-Mail: [sales@pasternack.com](mailto:sales@pasternack.com)