



## WR-28 With UG-599/U Flange to 2.92mm Male Waveguide to Coax Adapter Operating From 26.5 GHz to 40 GHz Ka Band

### Waveguide to Coax Adapters Technical Data Sheet

PE-W28CA002

#### Features

- Ka Band, 26.5 to 40 GHz Frequency Range
- WR-28 Waveguide Interface with UG-599/U Flange
- 2.92mm Male RF Interface
- Comprehensive waveguide offerings also include E-Bends, H-Bends, Sections, Filters, Terminations, Couplers, and more.

#### Description

PE-W28CA002 is a waveguide to coaxial adapter operating in the Ka Band with a 26.5 GHz to 40 GHz frequency range. This adapter offers a WR-28 waveguide interface size coupled with a UG-599/U flange. PE-W28CA002 is constructed of aluminum and plated in gold to ensure durability and repeatable RF performance. The versatile 2.92mm Male connector offered by this adapter is mechanically compatible with commercially available SMA and 3.5 mm connectors.

#### Configuration

Waveguide Size	WR-28
Flange	UG-599/U
RF Connector	2.92mm Male
Impedance	50 Ohms
Body Geometry	Right Angle

#### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	26.5		40	GHz
VSWR			1.29:1	
Insertion Loss			0.35	dB

#### Mechanical Specifications

<b>Size</b>	
Length	0.75 in [19.05 mm]
Width	0.75 in [19.05 mm]
Height	1.125 in [28.58 mm]

#### RF Connector

Connector Type	2.92mm Male
Body Material and Plating	Stainless Steel

#### Waveguide Interface

Waveguide Type	WR-28
Flange Type	UG-599/U
Body Material and Plating	Aluminum, Gold
Plating Specification	ASTMB488

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [WR-28 With UG-599/U Flange to 2.92mm Male Waveguide to Coax Adapter Operating From 26.5 GHz to 40 GHz Ka Band PE-W28CA002](#)



WR-28 With UG-599/U Flange to 2.92mm Male Waveguide to  
Coax Adapter Operating From 26.5 GHz to 40 GHz Ka Band

Waveguide to Coax Adapters Technical Data Sheet

PE-W28CA002

**Compliance Certifications** (visit [www.Pasternack.com](http://www.Pasternack.com) for current document)

RoHS Compliant  
REACH Compliant


06/14/2014

**Plotted and Other Data**

Notes:

- Values at +25 °C, sea level unless stated otherwise

**Typical Performance Data**

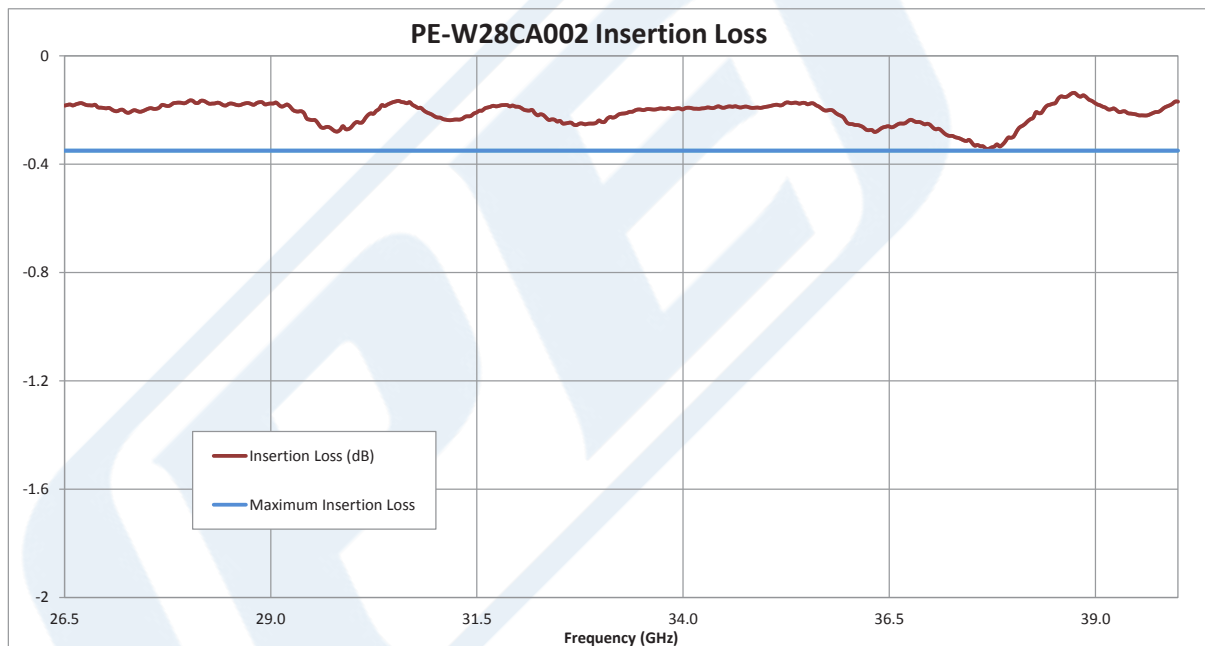


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [WR-28 With UG-599/U Flange to 2.92mm Male Waveguide to Coax Adapter Operating From 26.5 GHz to 40 GHz Ka Band PE-W28CA002](#)



WR-28 With UG-599/U Flange to 2.92mm Male Waveguide to Coax Adapter Operating From 26.5 GHz to 40 GHz Ka Band

Waveguide to Coax Adapters Technical Data Sheet

PE-W28CA002

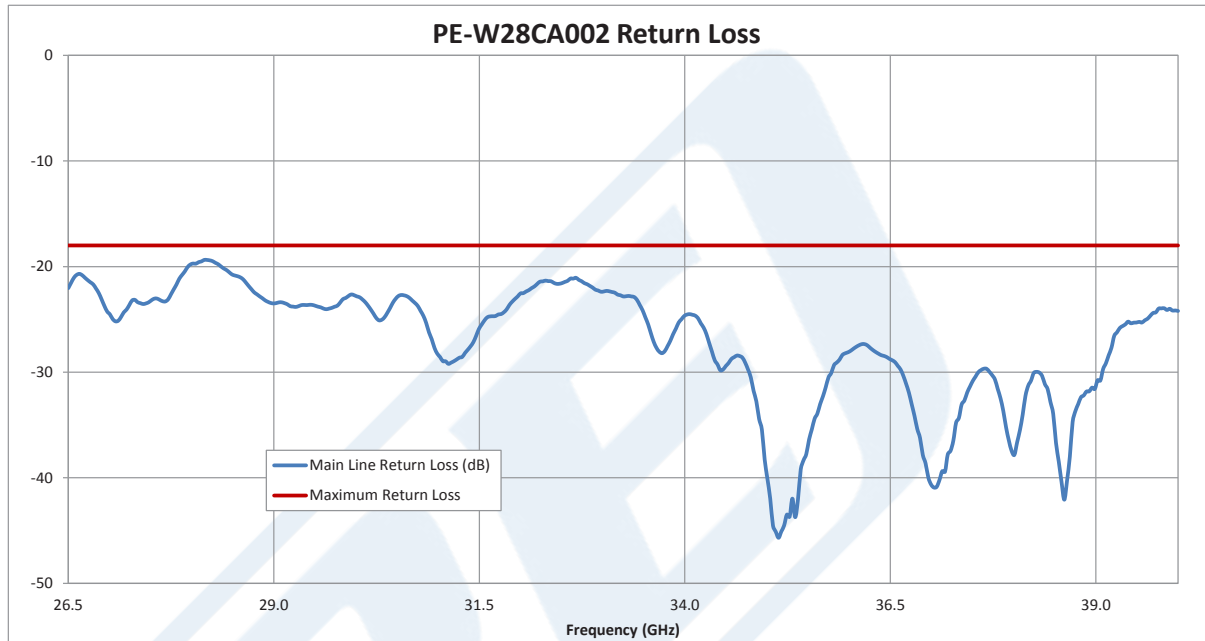

WR-28 With UG-599/U Flange to 2.92mm Male Waveguide to Coax Adapter Operating From 26.5 GHz to 40 GHz Ka Band from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [WR-28 With UG-599/U Flange to 2.92mm Male Waveguide to Coax Adapter Operating From 26.5 GHz to 40 GHz Ka Band PE-W28CA002](http://www.pasternack.com/wr-28-ug-599-2.92mm-waveguide-coax-adapter-40-ghz-pe-w28ca002-p.aspx)

URL: <http://www.pasternack.com/wr-28-ug-599-2.92mm-waveguide-coax-adapter-40-ghz-pe-w28ca002-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE-W28CA002 CAD Drawing

WR-28 With UG-599/U Flange to 2.92mm Male Waveguide to Coax  
Adapter Operating From 26.5 GHz to 40 GHz Ka Band

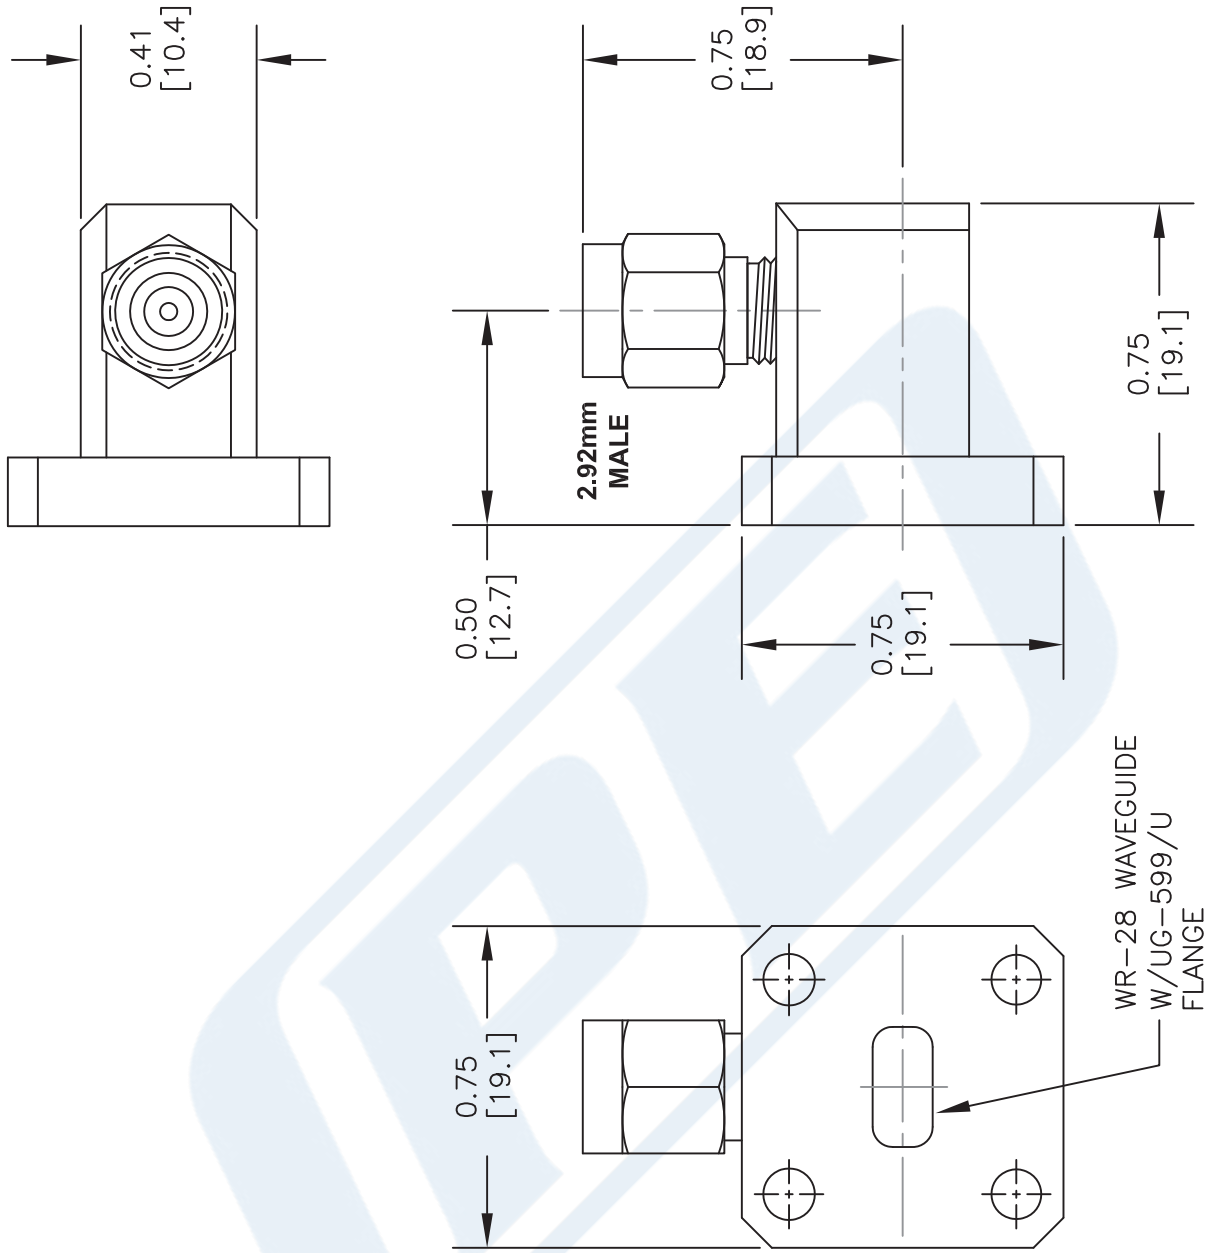

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. TOLERANCES ARE:		
DECIMALS	ANGLES	FRACTIONS
.XX ±.01	± 1/2°	± 1/64
.XXX ±.005		
HOLE DIAMETER	TOLERANCE	
.0135 TO .125	+.004/- .001	
.126 TO .250	+.005/- .001	
.251 TO .500	+.006/- .001	
.501 TO .750	+.008/- .001	
.751 TO 1.000	+.010/- .001	
1.001 TO 2.000	+.012/- .001	

\* THESE DIMENSIONS AND TOLERANCES  
SUPERSEDE NOTE #1 ON TITLE BLOCK.

NOTES:  
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.  
3. DIMENSIONS ARE IN INCHES [mm].

DWG TITLE  
**PE-W28CA002**

**PE PASTERNAK®**  
THE ENGINEER'S RF SOURCE  
Pasternack Enterprises, Inc.  
P.O. Box 16759 | Irvine | CA | 92623  
Phone: (949) 261-1920 | Fax: (949) 261-7451  
Website: www.pasternack.com | E-Mail: sales@pasternack.com

FSCM NO. 53919

CAD FILE 031215

SCALE N/A

SIZE A

2233