

# Surface Mount RF Transformer

# ADT1-1WT-1+ ADT1-1WT-1

75Ω 1 to 400 MHz



CASE STYLE: CD542


## Maximum Ratings

Operating Temperature	-20°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power	250mW
DC Current	30mA
Permanent damage may occur if any of these limits are exceeded.	


## Pin Connections

PRIMARY DOT	3
PRIMARY	1
SECONDARY DOT	4
SECONDARY	6
SECONDARY CT	5
NOT USED	2

## Outline Drawing

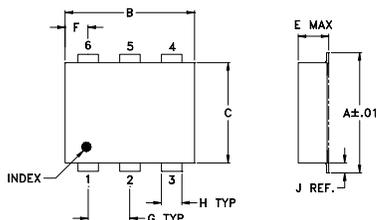

## PCB Land Pattern




Suggested Layout,  
Tolerance to be within ±.002

## Outline Dimensions (inch/mm)

A	B	C	D	E	F	G
.272	.310	.220	.100	.112	.055	.100
6.91	7.87	5.59	2.54	2.84	1.40	2.54
H	J	K	L			wt
.030	.026	.065	.300			grams
0.76	0.66	1.65	7.62			0.20

Demo Board MCL P/N: TB-430

## Config. A

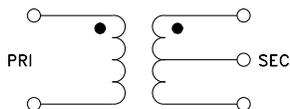

## Features

- 1dB bandwidth covers entire frequency range
- good return loss, 21 dB typ.
- leaded surface mount
- aqueous washable
- protected under US patent 6,133,525

## Applications

- high speed data communications
- baluns

**+RoHS Compliant**  
The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Available Tape and Reel at no extra cost

Reel Size	Devices/Reel
7"	20, 50, 100, 200, 500
13"	500, 1000

## Transformer Electrical Specifications

Ω RATIO	FREQUENCY (MHz)	INSERTION LOSS*	PHASE UNBALANCE (Deg.) Typ.	AMPLITUDE UNBALANCE (dB) Typ.	RETURN LOSS** (dB)	
					1 dB MHz	1 dB bandwidth
1	1-400	1-400	5	0.7	21	16


\* Insertion Loss is referenced to mid-band loss, 0.5 dB typ.

\*\* Return loss specified from 1 to 250 MHz


## Typical Performance Data

FREQUENCY (MHz)	INSERTION LOSS (dB)	INPUT R. LOSS (dB)	AMPLITUDE UNBALANCE (dB)	PHASE UNBALANCE (Deg.)
1.00	0.56	22.65	0.05	0.28
2.00	0.47	25.12	0.03	0.16
4.00	0.40	27.64	0.02	0.08
6.00	0.37	28.83	0.02	0.03
8.00	0.36	29.44	0.01	0.02
10.00	0.37	29.80	0.01	0.01
20.00	0.39	30.47	0.01	0.29
40.00	0.41	30.27	0.00	0.56
60.00	0.44	29.55	0.02	0.83
80.00	0.45	28.73	0.03	1.18
100.00	0.47	27.78	0.07	1.44
125.00	0.50	26.57	0.11	1.84
150.00	0.53	25.39	0.17	2.23
175.00	0.54	24.26	0.22	2.63
200.00	0.56	23.23	0.29	3.04
225.00	0.60	22.30	0.37	3.40
250.00	0.62	21.50	0.45	3.72
275.00	0.66	20.78	0.54	4.20
300.00	0.68	20.11	0.65	4.57
325.00	0.74	19.48	0.76	4.98
350.00	0.77	18.81	0.87	5.34
375.00	0.82	18.16	1.01	5.66
400.00	0.89	17.52	1.16	5.96

ADT1-1WT-1  
INSERTION LOSS

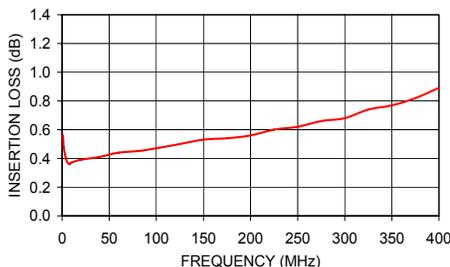

ADT1-1WT-1  
INPUT RETURN LOSS

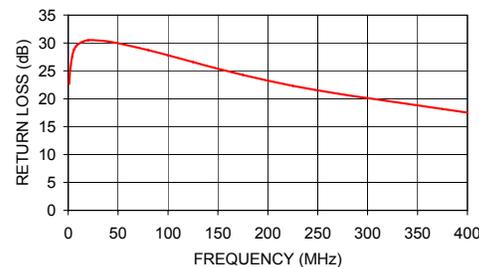

## Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)

