



Absorptive 2-18.0GHz Coaxial SP8T Switch



Features

- Wide Band Operation 2-18.0GHz
- High Power Handle Capability up to 5W upon request.
- TTL compatible driver include
- Fast Switching Speed
- Low Insertion Loss and High Isolation
- Temperature Range -40°C~+85°C
- Customization available upon request


Specification	Absorptive type			
	PN: RFSP8TA0218G			
	Low	Med	High	
Frequency Range(GHz)	2	10	18	
Insertion Loss(dB)	2dB typ. @2GHz	2.5dB typ. @10GHz	4dB typ. @18GHz	
VSWR	2	1.8	2	
Isolation(dB)	85	85	80	
Switching Speed(ns)	50	100	150	
P0.1dB Power (dBm)		30		
Absolutely max. Power (W)			5	
Weight (g)	55			
IIP3 (Input IP3) dBm	50			
Impedance(Ohms)	50Ω			
Power Supply (V)	+/-5 V DC			
Current(mA)	240mA (+5V) 100mA (-5V)			
Input Connector	SMA-Female			
Output Connector	SMA-Female			
Finishing	Gold Plating			
Material	Brass			
Seal	Hermetically Sealed			
Control (TTL Driver Included)	TTL Control			
	C3	C2	C1	Status
	0	0	0	Jo-J1
	0	0	1	Jo-J2
	0	1	0	Jo-J3
	0	1	1	Jo-J4
	1	0	0	Jo-J5
	1	0	1	Jo-J6
	1	1	0	Jo-J7
	1	1	1	Jo-J8



Absolute Maximum Ratings	
Biasing	+/-5 V
TTL Control Voltage	+5V/oV
Input RF power	1W
Storage Temperature (C°)	-50 ~ +125

Environment specifications	
Operational Temperature (C°)	-45 ~ +85
Storage Temperature (C°)	-50 ~ +125
Altitude	30,000 ft (Controlled environment)
Vibration	55g rms (15 degree 2KHz)
Humidity	100% RH at 35c, 95%RH at 40 deg c
Shock	20G for 11msc

Ordering Information		
Part No	ECCN	Description
RFSP8TA0218G	EAR99	SP8T 2-18.0GHz PIN Diode Switch

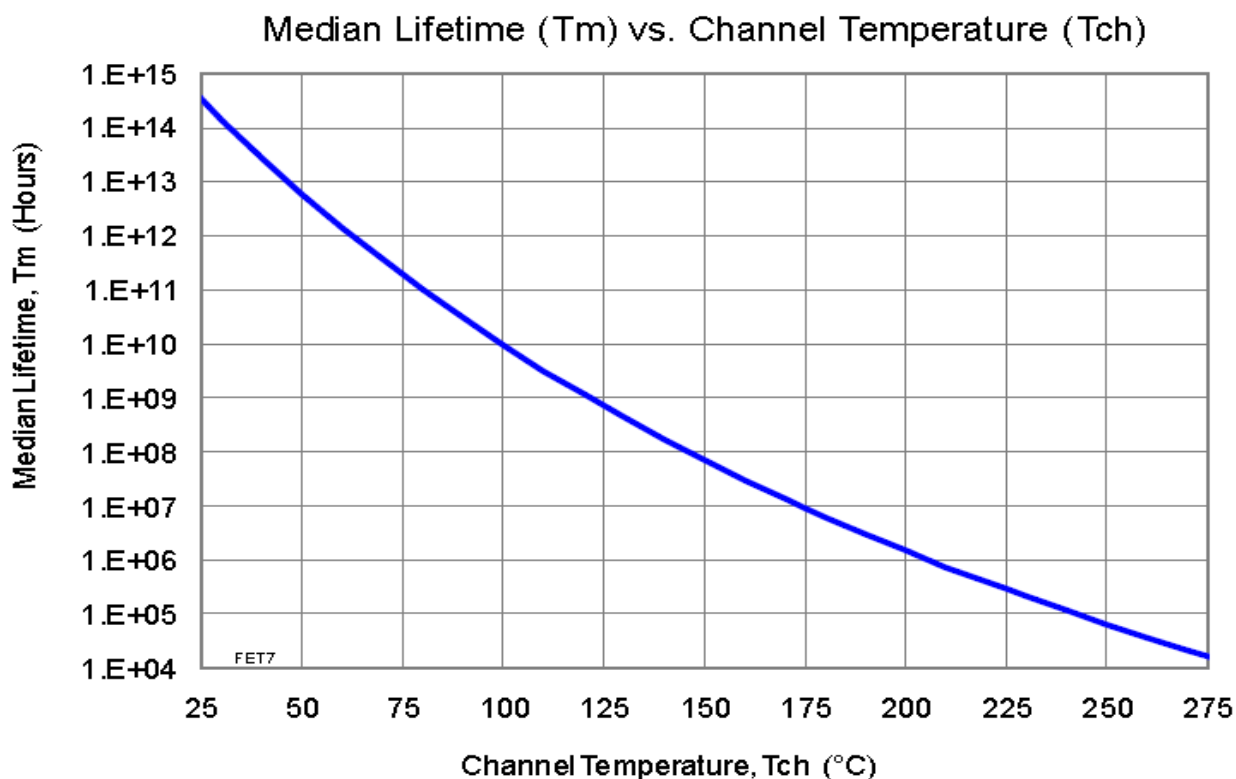









RF-LAMBDA

The power beyond expectations

RFSP8TA0218G

Absorptive Coaxial Single Pole Eight Throw Switch 2-18.0GHz

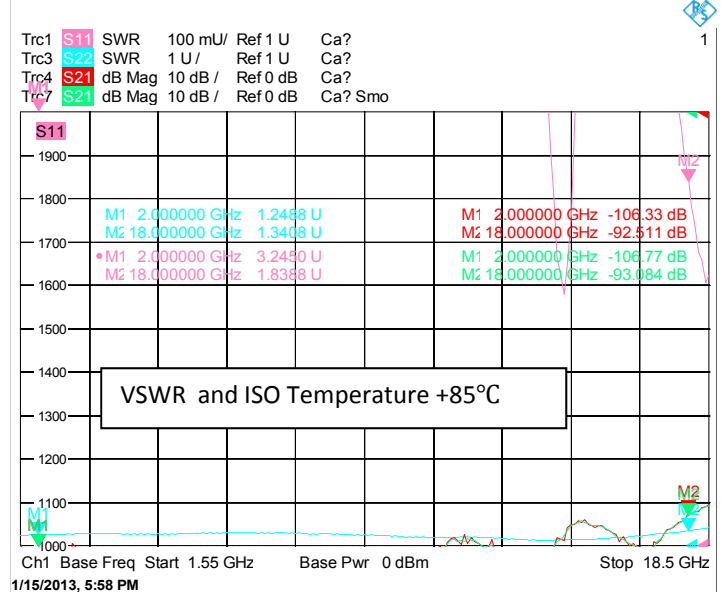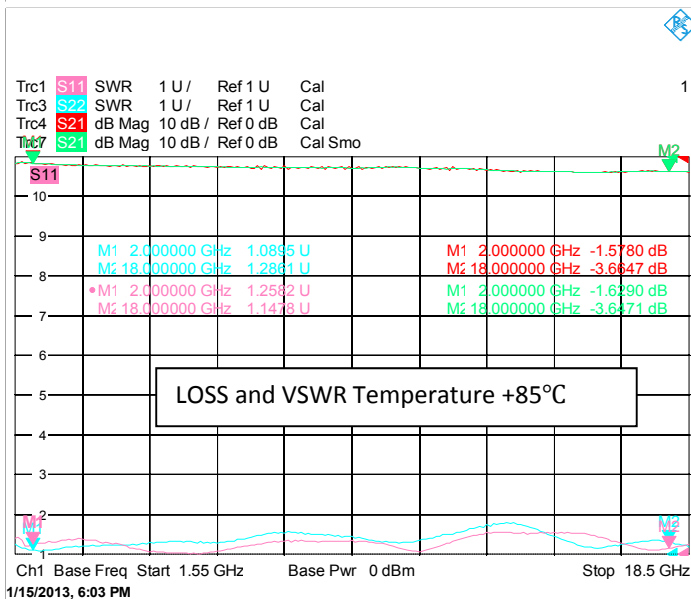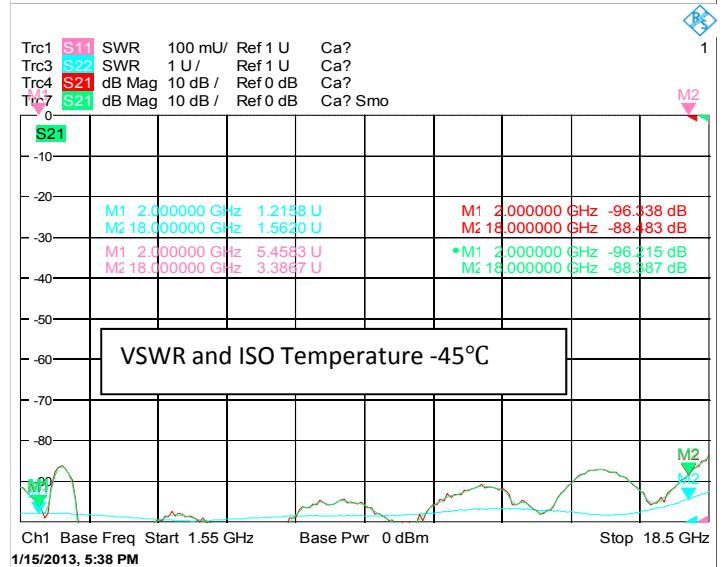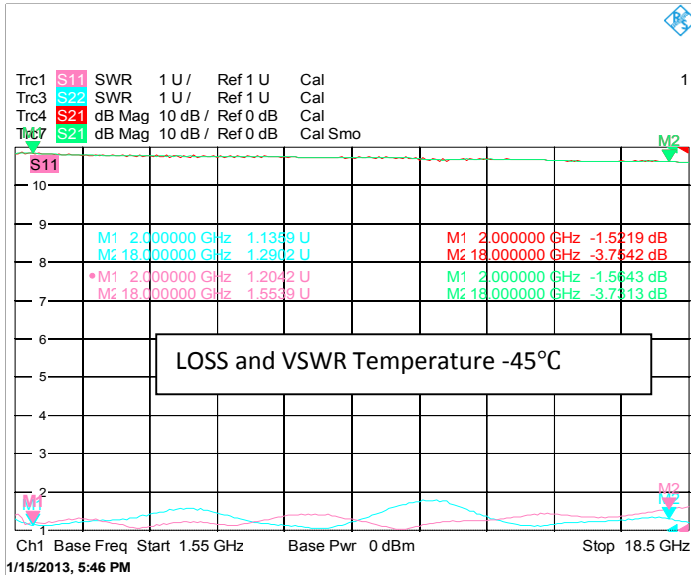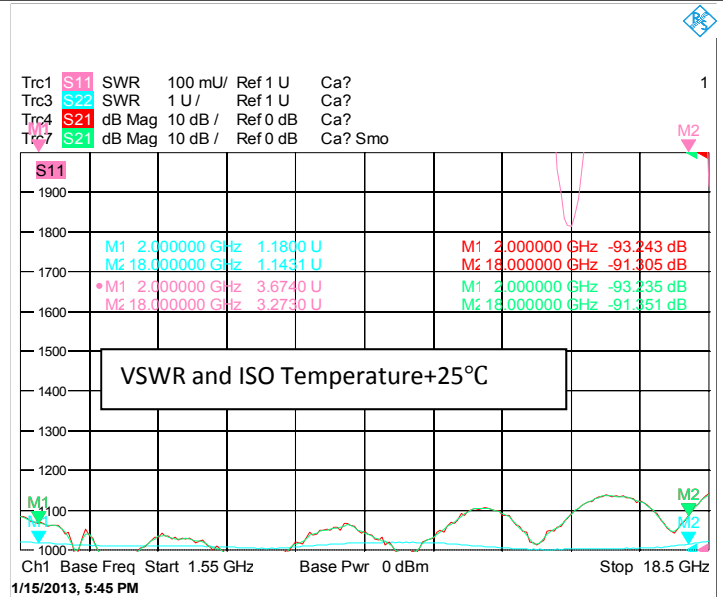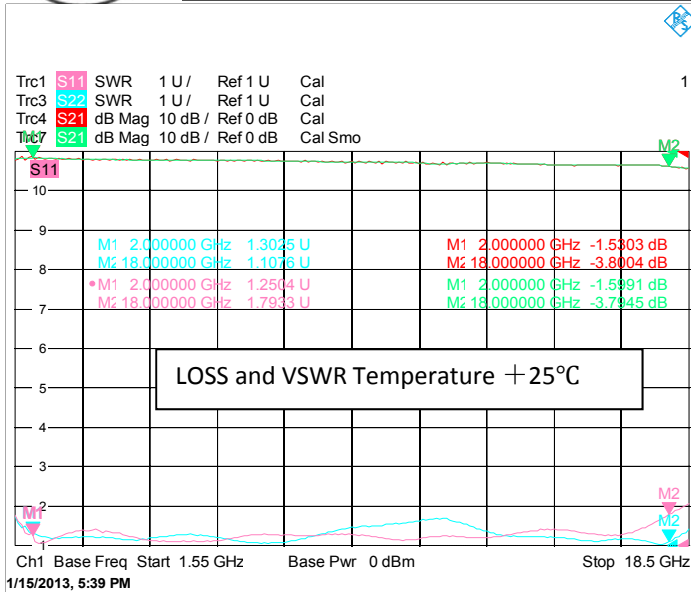





RF-LAMBDA

The power beyond expectations






RFSP8TA0218G

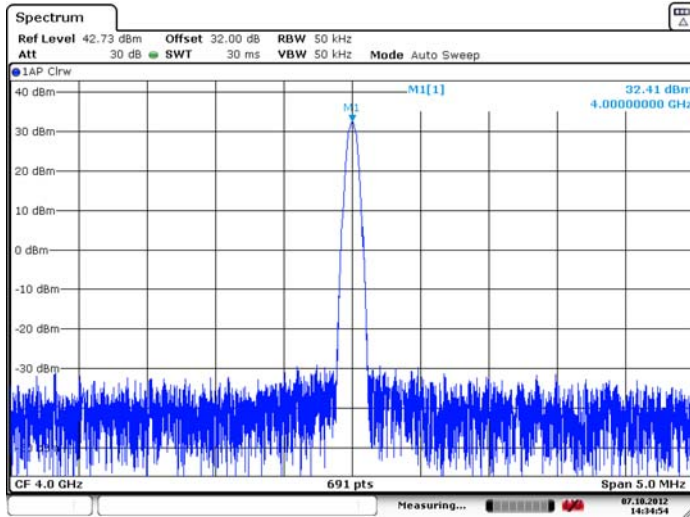

Date: 7.OCT.2012 14:34:54

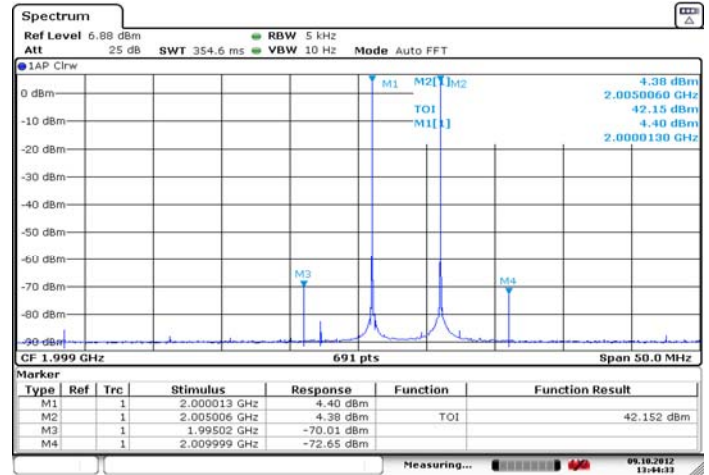

Date: 9.OCT.2012 13:44:33

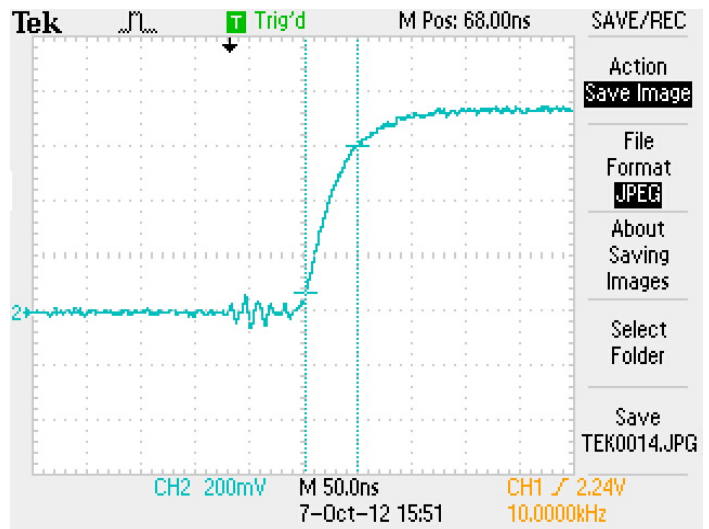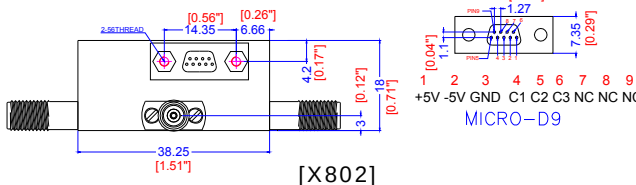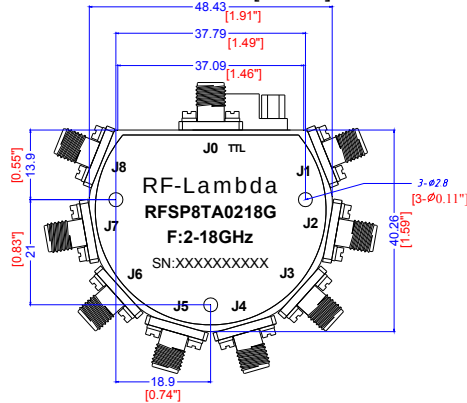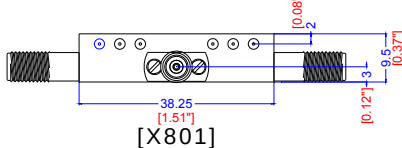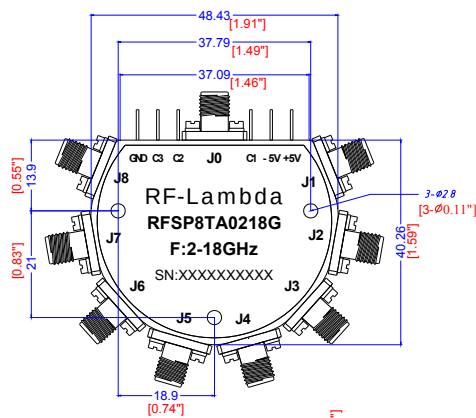

Important Notice

The information contained herein is believed to be reliable. RF-Lambda makes no warranties regarding the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for any of the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for the use of the information contained herein. The information contained herein is provided "AS IS, WHERE IS" and with all faults, and the entire risk associated with such information is entirely with the user. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for RF-Lambda products. The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information.

RF-Lambda products are not warranted or authorized for use as critical components in medical, life-saving, or life sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.