
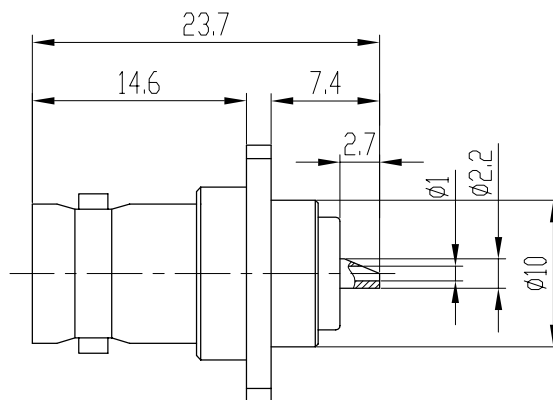


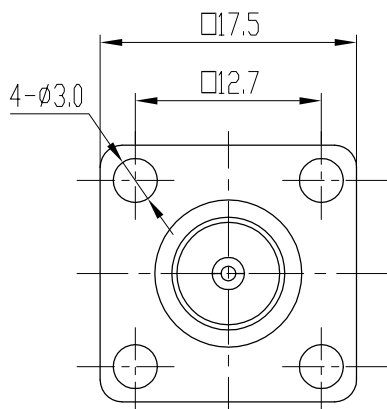

Electrical Characteristics:

1. Characteristic Impedance: 50 Ω
2. Frequency range: DC~4Ghz
3. Contact resistance
Center conductor: $\leq 1.5 \text{ m}\Omega$
Out conductor: $\leq 0.2 \text{ m}\Omega$
4. Insulation resistance: $\geq 5000 \text{ M}\Omega$
5. Insulator withstanding: 1500V
6. Durability: 500cycles

Application: MIL-C-39012/16E

Material&Finishing

1. Center contact :
Female: phosphor bronze, gold plated
2. Bodies and other metal parts:
brass, nickel plated
3. Insulators: PTFE

主要性能指标:

1. 特性阻抗: 50 Ω
2. 频率范围: DC~4Ghz
3. 接触电阻:
中心导体: $\leq 1.5 \text{ m}\Omega$
外导体: $\leq 0.2 \text{ m}\Omega$
4. 绝缘电阻: $\geq 5000 \text{ M}\Omega$
5. 介质耐压: 1500V
6. 插拔次数: 500次

执行标准: MIL-C-39012/16E

材料和镀层

1. 中心接触件:
插孔: 锡磷青铜, 镀金
2. 壳体和其它金属零件: 黄铜, 镀镍
3. 绝缘子: 聚四氟乙烯

		SCALE 2:1	BNC-KF RF COAXIAL CONNECTOR	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE mm, TOLERANCES ARE FRACTIONS DECIMALS ANGLES .X $\pm$.15 $\pm 1^\circ$.XX $\pm$.05 .XXX $\pm$
DRAWN	NAME	DATE		
CHECKED				
APPROVED				

西安富士达科技股份有限公司
XI'AN FORSTAR S&T CO.,LTD.