



**Advantech
Wireless**



SapphireBlu™ Class GaN Technology

800W Ku-Band Rackmount
UltraLinear™ SSPA/ SSPB

SSPA ARMAg-K 5200-SapphireBlu™ series
SSPB (BUC) ARMUg-K 5200-SapphireBlu™ series




THE ULTIMATE SOLUTION FOR DIRECT TO HOME TV

- Exceeds all barriers between Klystrons, TWTs and SSPAs
- Save Millions of dollars in Energy Cost, Satellite Bandwidth, CAPEX
- Can cover multiple transponders, full DVB-S2 enabled
- Indoor Package, MIL-STD-188-164A Compliant
- Redundant Ready, Power Expandable to 3 KW by phase combining

- ⇒ We can now saturate all transponders of an entire satellite and obtain maximum bandwidth/power efficiency! (using modular RF concept)
- ⇒ 3 years warranty, due to increased GaN Technology reliability
- ⇒ Backed by over 25 years of Indoor SSPA design and manufacturing.

- High power density in a compact, indoor package
- UltraLinear™, designed for Multi Carrier Operations
- High Performance GaN Technology SSPA Indoor design concept
- High Reliability, High Linearity, Low Energy Consumption

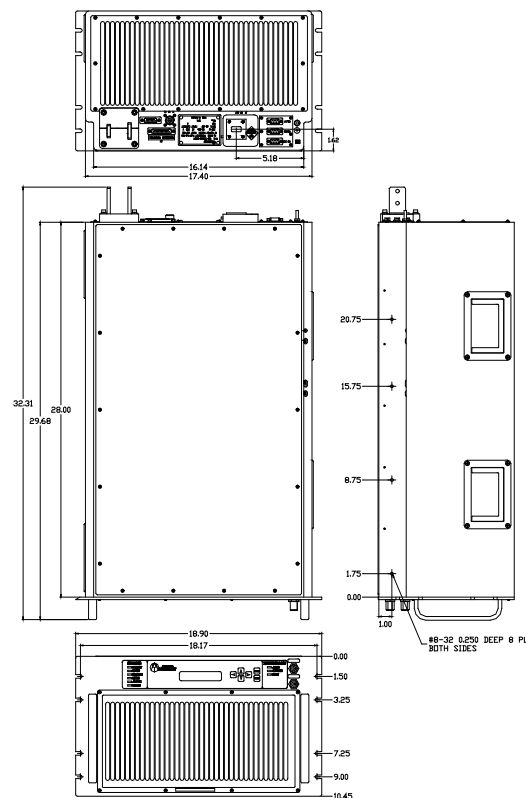

Please call or visit our site for more information >>>

www.AdvantechWireless.com

Specifications	KS / KX		
Operating Frequency	14.0 – 14.5 GHz / 13.75 – 14.5 GHz		
L-Band input (BUC)	950 – 1450 MHz / 950 – 1700 MHz		
Output Power	800W		
PSAT, PA Module	+60.0 dBm nominal		
P _{SAT} , at Flange	+59 dBm nominal		
PLINEAR	+55.0 dBm minimum		
	P _{LINEAR} is the power at which the IMD specs are met and the spectral regrowth is <-30 dBc @ 1.0 x symbol rate for QPSK/OQPSK/8PSK modulation QPSK/OQPSK/8PSK modulation		
Gain SSPA	68 ± 3 dB		
SSPB (BUC)	78 ± 3 dB		
Gain adjustment range	20 dB in 1.0 dB steps		
Gain flatness over full band	SSPA 2dB p-p max SSPB (BUC) 4 dB p-p max (KS); 4dB p-p (KX)		
Gain slope over 40 MHz	± 0.3 dB max SSPB (BUC) ± 0.5 dB max		
Gain variation over temperature	± 1.5 dB max		
Input Impedance and VSWR	50 Ω SSPA 1.3:1 SSPB (BUC) 1.4:1		
Output VSWR	1.3:1		
Noise power density	-70 dBm/Hz in Transmit Band, -145 dBm/Hz in Receive Band (10.95 GHz – 12.75 GHz)		
Spurious at P _{LINEAR}	SSPA: -65 dBc max SSPB (BUC): -55 dBc max		
Harmonics	-50 dBc @ P _{LINEAR}		
AM/PM conversion	<1.0º/dB P _{LINEAR}		
Third order intermod (two tones)	-25 dBc two signals 5 MHz apart at total +56 dBm Plinear		
Group delay	Ripple 1 nsec p-p max over any 40 MHz band		
Residual AM Noise	0 – 10 kHz -45 dBc		
	10 kHz – 500 kHz -20 (1.25 + log F) dBc F = Frequency in kHz		
	500 kHz – 1 MHz -80 dBc		
SSPB (BUC)			
Local Oscillator freq.	13.05 GHz		12.8 GHz
Internal Reference frequency (optional)	10 MHz		
	Aging/day	±2 ⁻¹⁰	
	Aging/year	±5 ⁻⁸	
	Stability	±2 ⁻⁸ over temp range	
Phase Noise	-53 dBc/Hz at 10Hz		-83 dBc/Hz at 10 kHz
	-63 dBc/Hz at 100Hz		-93 dBc/Hz at 100 kHz
	-73 dBc/Hz at 1000Hz		
External Reference Frequency phase noise (max)	10 MHz		
	-120 dBc/Hz at 10Hz		-155 dBc/Hz at 10 kHz
	-135 dBc/Hz at 100Hz		-160 dBc/Hz at 100 kHz
	-150 dBc/Hz at 1000Hz		
Weight & Dimensions			
Dimensions	19” Rackmount 6 RU + 2 RU Power supply 28” deep		
Weight	198 lbs (90 kg)		
AC input voltage	190 – 265 VAC (47-63 Hz)		
Power consumption	3.5kW at 53 dBm	4.8 kW at P _{LINEAR}	6.0kW at P _{SAT}
Interfaces	Input (RF or L-Band) - N type female		AC line - IEC 320 Inlet
	Output Sample Port - N type female		RF output - WR75 Cover
	RS485/Ethernet	DB9 / RJ45	
Environmental	Temperature	Operating 0°C to +50°C	
		Storage -55°C to +85°C	
	Humidity	5% to 95% non condensing	
	Altitude	10,000’ AMSL, derated by 2°C/1000’ from AMSL	

NORTH AMERICA
USA
Tel: +1 703 659 9796
Fax: +1 703 635 2212
info.usa@advantechwireless.com

CANADA
Tel: +1 514 420 0045
Fax: +1 514 420 0073
info.canada@advantechwireless.com

EUROPE
UNITED KINGDOM
Tel: +44 1480 357 600
Fax: +44 1480 357 601
info.uk@advantechwireless.com

RUSSIA & CIS
Tel: +7 495 971 59 18
info.russia@advantechwireless.com
INDIA
Tel: +91 33 2415 5922
info.india@advantechwireless.com

SOUTH AMERICA
Tel: +1 514 420 0045
Fax: +1 514 420 0073
info.latam@advantechwireless.com

BRAZIL
Tel: +55 11 3054 5701
Fax: +55 11 3054 5701
info.brazil@advantechwireless.com

An ISO 9001: 2008 Company



Ref.: PB-SAPPH-Rack-Ku-800-15118

www.advantechwireless.com

Specifications are subject to change without notice