OPHIR RF
5300 Beethoven Street, Los Angeles, CA 90066
TEL: (310)306-5556 • FAX: (310)821-7413
WEB: www.ophirrf.com • E-MAIL: sales@ophirrf.com

MODEL 5056

0.8 - 4.2 GHz
1.2 WATTS
LINEAR POWER RF AMPLIFIER

Solid State Broadband High Power RF Amplifier

The 5056 is a 1.2 Watt broadband amplifier that covers the 0.8 – 4.2 GHz frequency range. This small and lightweight amplifier utilizes Class A/AB linear power devices that provide an excellent 3rd order intercept point, high gain, and a wide dynamic range.

Due to robust engineering and employment of the most advanced devices and components, this amplifier achieves high efficiency operation with proven reliability. Like all OPHIR$_{RF}$ amplifiers, the 5056 comes with an extended multiyear

	Parameter	Specification @ 25° C
Electrical		
1	Frequency Range	0.8 – 4.2 GHz
2	Saturated Output Power	1.2 Watts typical
3	Power Output @ 1dB Comp.	1.0 Watts min
4	Small Signal Gain	+30 dB min
5	Small Signal Gain Flatness	± 2.0 dB max
6	IP_3	+41 dBm typical
7	Input VSWR	2:1 max
8	Harmonics	-20 dBc typical @ 1 Watt
9	Spurious Signals	< -60 dBc typical @ 1 Watt
10	Input/Output Impedance	50 Ohms nominal
11	AC Input Power	50 Watts max
12	AC Input	100 – 240 VAC, single phase
13	RF Input	+10 dBm max
14	RF Input Signal Format	CW/AM/FM/PM/Pulse
15	Class of Operation	A/AB
Mechanical		
16	Dimensions	19" x 3.5" x 18"
17	Weight	22 lb. max
18	Connectors	Type-N
19	Grounding	Chassis
20	Cooling	Internal Forced Air
Environmental		
21	Operating Temperature	0º C to +50º C
22	Operating Humidity	95% Non-condensing
23	Operating Altitude	Up to 10,000' Above Sea Level
24	Shock and Vibration	Normal Truck Transport

Specifications subject to change without notice.

CIRCUIT PROTECTIONS

◊ Thermal Overload
◊ Over Current
◊ Over Voltage

ORDERING MODELS

◊ R - Rear Panel Connectors
◊ F - Front Panel Connectors
◊ RE - R model w/Control Option
◊ FE - F model w/Control Option
◊ RT - RE model w/Ethernet Interface
◊ FT - FE model w/Ethernet Interface

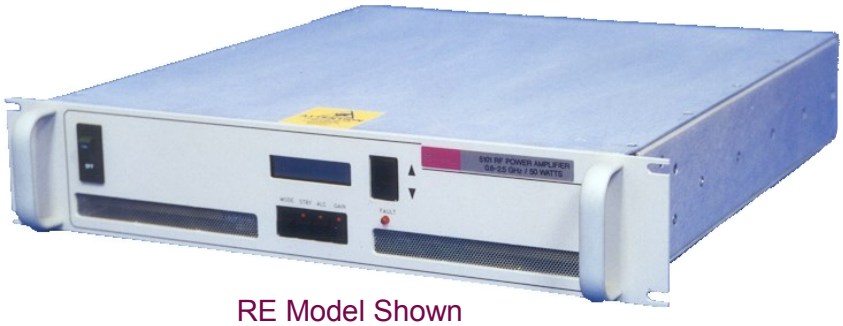

RE Model Shown

Approved By: _____ Date: _____