

# 1557 to 1615MHz – Band Stop Filter

## Design Features


- ◆ High RF performance, ultra-competitive price.
- ◆ Military, space and commercial applications.
- ◆ Custom design available upon request.
- ◆ Guaranteed for one year standard.

## RF Characteristics

Model Number	Band Reject Frequency (MHz)	Pass Band Frequency	Band Reject Rejection Min(dB)	VSWR Max	Insertion Loss Max(dB)	Power (W)	Connector Type	Temp.(°C)
UIYBSF14768A1557T1615SF	1557 ~ 1615	DC~1450MHz 1730~3000MHz	45	2.0	1.5	50	SMA-F	-55 ~ +85

- <sup>2</sup> Listed are specific frequency ranges and other ranges are available.
- <sup>2</sup> Please provide the below informations when inquiring and mark \* is required.
- \* 1. The specific pass band frequency range
  - \* 2. The specific rejection and frequency
  - 3. Other special requests (such as Insertion Loss, VSWR, Connector Type, Dimension, etc.)

## Mechanical Drawing

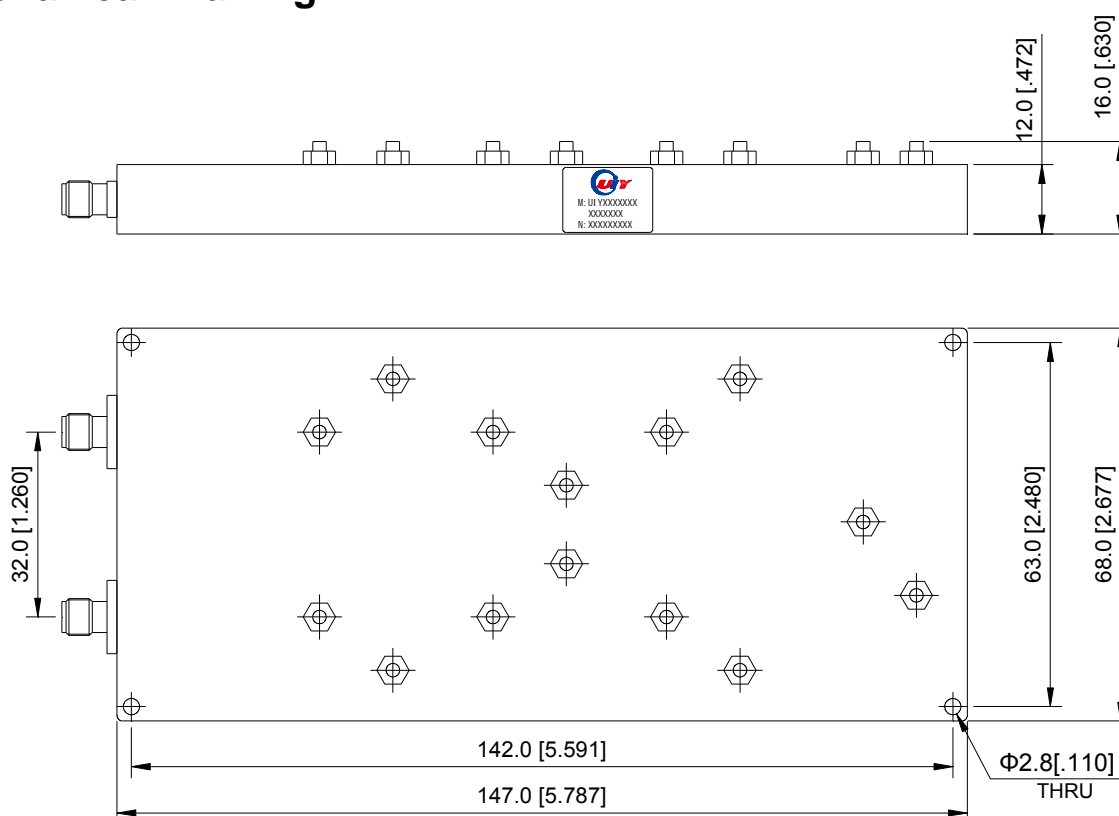

Unit: mm/ inch, General part tolerance is  $\pm 0.2$ mm unless otherwise stated.

Ver. 5

A2-5G, Zhujiang Plaza, Longxiang Blvd, Longgang District, Shenzhen 518172, China.

Tel: +86-755-25999990 25999909 Fax: +86-755-25999959 E-mail: sales@uiy.com Web: www.uiy.com