
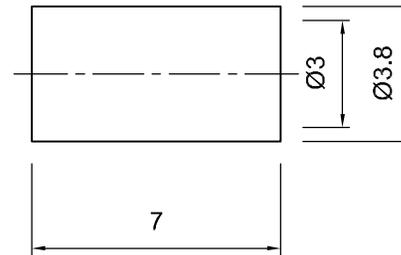


| | | | |
|--|---------------------------|----------|------|
| Tolerances 1-20=+/-0.2 20-30=+/-0.3 30-40=+/-0.4 40-50=+/-0.5 50-100=+/-0.75 100-300=+/-1.5 Angles=+/-1 Dimensions are in Millimeters | Revisions | Approved | Date |
| | Description/Approved/Date | M.H. | |
| | | Checked | Date |
| | | M.H. | |
| | Drawn | Date | |
| | T.J.A. | 07/19/06 | |
| NOTES (plating thickness in micro-inches): 1. Per QQ-B-626 2. Per QQ-S-764 3. Per QQ-C-530 4. Per QQ-B-750 5. Per MIL-P-19468 6. Per ZZ-R-765 7. Per WW-T-799 8. Gold pl. 5 min. over nickel pl. 50 min. over copper strike 9. Nickel pl. 100 min. over copper strike 10. Per QQ-P-35 11. Gold pl. 30 min. over nickel pl. 50 min. over copper strike | | | |

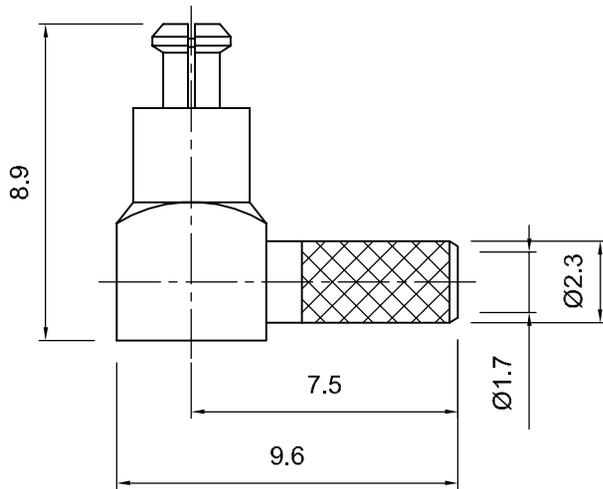

| ITEM | MATERIAL | FINISH | Lighthouse Technologies, Inc. | | |
|----------------------|-------------------------|---------------|---|---|------------|
| Connector Body | Brass, Note 1 | Gold, Note 8 |  | 5640 Kearny Mesa Road, Suite N San Diego, CA 92111 | |
| Center Contact: Male | BeCu, Note 3 | Gold, Note 11 | | Part Number: LTI-MDLM11GT-316 | |
| Insulation | Teflon, Note 5 | None | Description | | |
| Ferrule | Annealed Copper, Note 7 | Same as body | MC-Card right angle crimp plug for RG-316 cable. | | |
| Gasket | -- | -- | Gold plated brass body, Teflon dielectric. | | |
| Hex Nut | -- | -- | Scale | Drawing No. | File Name |
| Lock Washer | | -- | 4:1 | | MDLM11-316 |