



Standards
NF C 96-315
MIL-DTL-39030

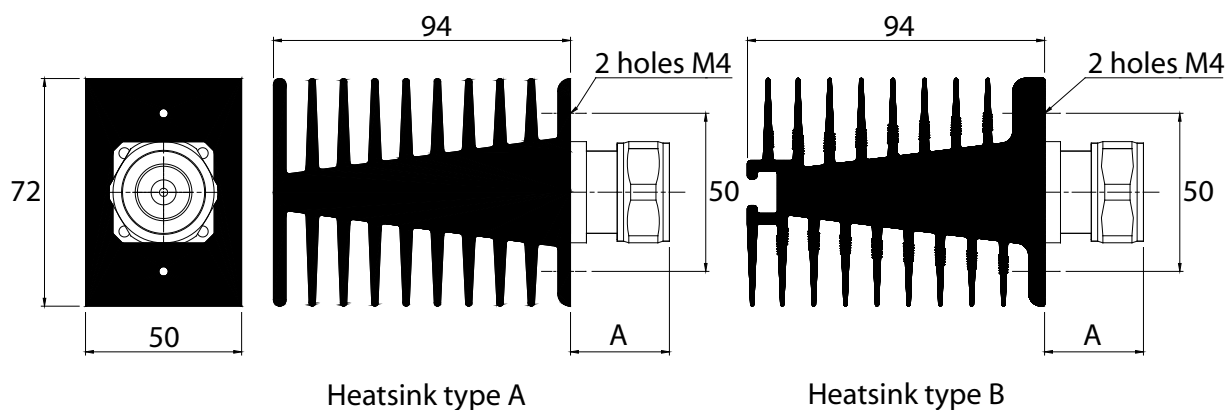

Impedance	$50 \Omega \pm 2\%$
Frequency	DC – 4 GHz
Max VSWR	≤ 1.10 at 2 GHz, ≤ 1.20 at 4 GHz
Temperature range	-55 to +125°C
Average power @ 25°C	50 W
Peak power	5 kW
Weight	540 g



Dimensions in mm

Loads can be delivered indifferently either with heatsink type A or heatsink type B

P/N	Connector	A
17-3359	N m	21
17-3255	N f	19
17-0167	7-16 m	31
17-0133	7-16 f	22
17-0234	BNC m	22
17-0257	BNC f	18
17-0579	EIA 7/8 "	45

Option	IP 68
--------	-------