



CONTACT: BREAK BEFORE MAKE
ACTUATOR: LATCHING
SWITCHING SPEED: 20 mSEC MAX

ACTUATOR VOLTAGE: 28.0±3.0 Vdc
ACTUATOR CURRENT: 0.125 A MAX @ 28.0 Vdc
POWER HANDLING: 200W CW @ 1.0 GHz

OPERATING TEMP: -54°C TO +90°C
SINE VIBRATION: 30 G'S rms
LIFE: 1,000,000 CYCLES
RANDOM VIBRATION: 20 G'S rms

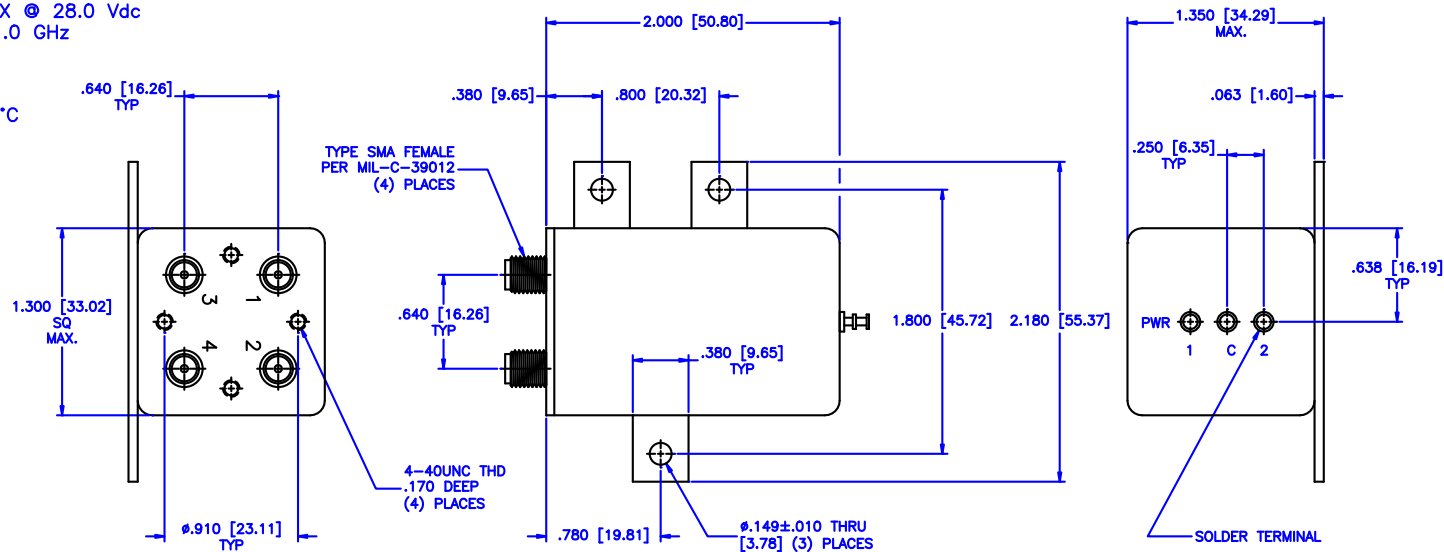

IMPEDANCE (Ohms): 50 50 50 50

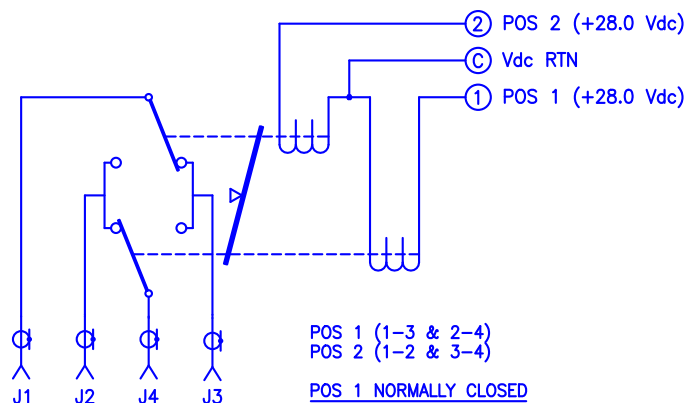**MCLI**

MICROWAVE COMMUNICATIONS LABORATORIES INC.
7255 30TH AVE. N. SAINT PETERSBURG, FL 33710
TEL: (727) 344-6254 FAX: (727) 381-6116
<http://WWW.MCLI.COM>

SCALE:	N/A
SHEET:	N/A

UNLESS OTHERWISE SPECIFIED:
TOLERANCES
IN (INCHES) OR [mm] (MILLIMETERS)
FRACTIONS: $\pm 1/64$
DECIMALS: $\pm 0.01 \pm 0.005$
ANGLE: $\pm 1/2^\circ$

DRAWING TITLE:	
-----------------------	--

ELECTROMECHANICAL SWITCHES

PART NO.

C1-6-L

DRAWN: Paiboon Luekhamhan

DATE:	03-31-2001
-------	------------

APPROVED: T. Nguyen

DATE:	03-31-2001
-------	------------

PROPRIETARY NOTICE:
THE INFORMATION IN THIS DRAWING IS PROPRIETARY
AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN
PERMISSION FROM MICROWAVE COMMUNICATIONS
LABORATORIES INC. (MCL)

CAGE CODE:

SIZE:	
-------	--

REV:

	DWG NO.
--	---------

OD2L5

DO NOT SCALE THE DRAWING

84712