

TERMINATION FLANGED

DC-200 MHz, 800 WATTS

SPECIFICATIONS:


Electrical:

Frequency Range _____ DC - 200 MHz
Ohm Value** _____ 50 \pm 5% Ohms Standard
Power Handling* _____ 800 Watts Average
Derated Linearly to 0 Watts @ +150°C
VSWR _____ 1.25:1 Max.
Operating Temp. Range _____ -55°C to +150°C


Mechanical:

Substrate _____ Beryllium Oxide
Resistor Material _____ Proprietary Thick Film
Cover _____ Alumina Ceramic
Flange _____ Nickel Plated Copper
Tab _____ Gold Plated Beryllium Copper

*Mounting Surface Shall not Exceed 100°C Max.

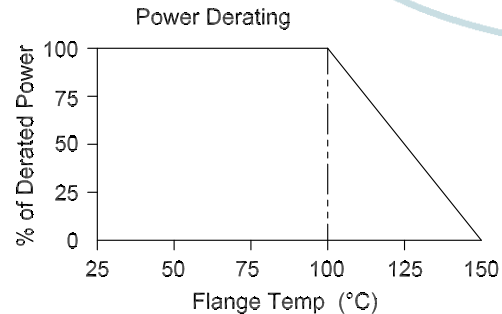

Model Number: TPT1250-800-50R0J Shown

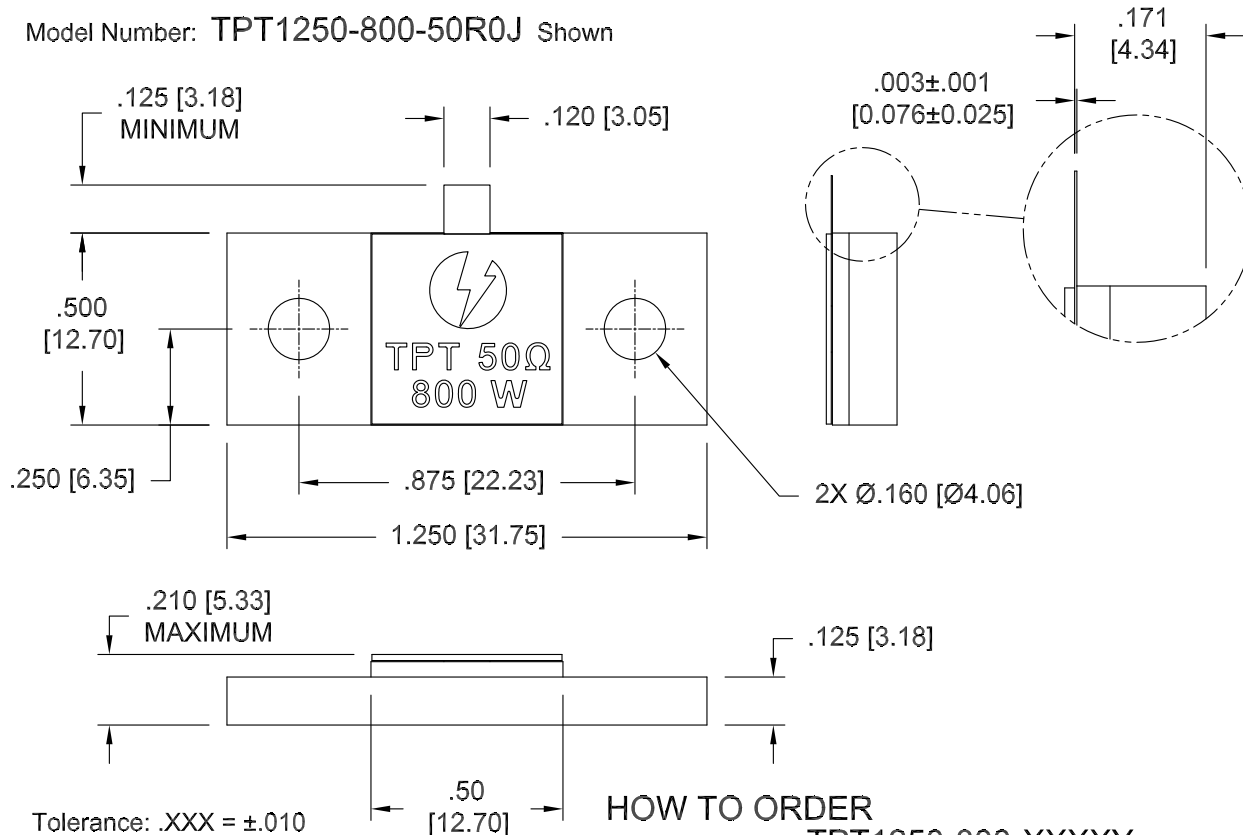

Tolerance: .XXX = \pm .010

HOW TO ORDER

Model Number: TPT1250-800-XXXXY

Ohm Value** _____ Tolerance
50R0 = 50 Ohms G = \pm 2%
1000 = 100 Ohms J = \pm 5%
(Other Values Available)

Note: Dimensions in Brackets are Expressed in Millimeters and are for Reference Only.

Design Specifications are subject to change without notice.

OL-TPT1250-800; REV 00



Aeroflex / Inmet, Inc. • 300 Dino Drive, Ann Arbor, MI 48103 • U.S.A.
888-244-6638 or 734-426-5553 • FAX: 734-426-5557
www.aeroflex-inmetcorp.com • sales@aeroflex-inmetcorp.com