

HCMOS 5x3.2mm 5.0V SMD Oscillator



Model: F550H SERIES

RoHS Compliant / Pb Free

Rev. 5/7/2009

Page 1 of 2

http://www.foxonline.com/need_a_sample.htm

Need a
Sample®

FEATURES

- 5.0V Operation
- HCMOS Output
- Tape and Reel (1,000 pcs. STD)

• PART NUMBER SELECTION [Learn More](#) - Internet Required

Part Number	Model Number	Frequency Stability ¹	Operating Temperature (°C)	Frequency Range (MHz)
480-Frequency-xxxxx	F550H	±100PPM	-10 ~ +70	1.800 ~ 50.000
481-Frequency-xxxxx	F550HR	±100PPM	-40 ~ +85	1.800 ~ 50.000
482-Frequency-xxxxx	F555H	±50PPM	-10 ~ +70	1.800 ~ 50.000
723-Frequency-xxxxx	F555HR	±50PPM	-40 ~ +85	1.800 ~ 50.000
493-Frequency-xxxxx	F556H	±25PPM	-10 ~ +70	1.800 ~ 50.000

• ELECTRICAL CHARACTERISTICS


PARAMETERS	MAX (unless otherwise noted)
Frequency Range (Fo)	1.800 ~ 50.000 MHz
Storage Temperature Range (T _{STG})	-55°C ~ +125°C
Supply Voltage (V _{DD})	5.0V ± 5%
Input Current (I _{DD})	45mA
1.800 ~ 50.000 MHz	
Output Symmetry (50% V _{DD})	40% ~ 60%
Rise Time (10% ~ 90% V _{DD}) (T _R)	7nS
Fall Time (90% ~ 10% V _{DD}) (T _F)	7nS
Output Voltage (V _{OL})	10% V _{DD}
(V _{OH})	90% V _{DD} Min
Output Current (I _{OL})	4mA Min
(I _{OH})	4mA Min
Output Load (HCMOS)	50pF
Start-up Time (T _S)	10mS
Output Disable Time ²	100nS
Output Enable Time ²	100nS

¹ Inclusive of 25°C tolerance, operating temperature range, input voltage change, load change, aging, shock, and vibration. *Excludes Shock/Vibration

² An internal pullup resistor from pin 1 to pin 4 allows active output if pin 1 is left open.

Note: A 0.01µF capacitor should be placed between V_{DD} (Pin 4) and GND (Pin2) to minimize power supply noise.

*Dimensional drawing is for reference to critical specifications defined by size measurements. Certain non-critical visual attributes, such as side castellations, reference pin shape, etc. may vary. All specifications subject to change without notice.

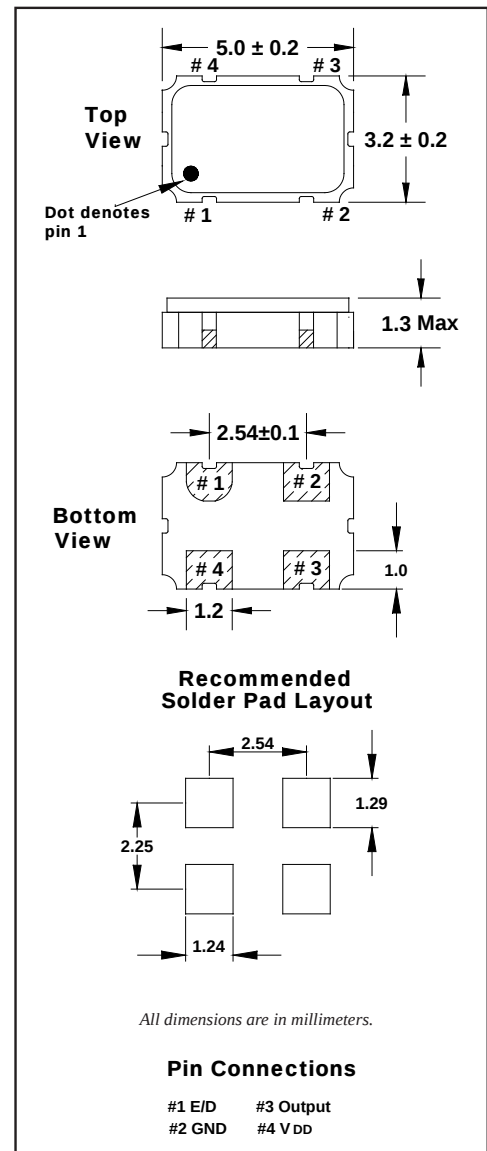

• ENABLE / DISABLE FUNCTION

INH (Pin 1)	OUTPUT (Pin 3)
OPEN ²	ACTIVE
'1' Level V _{IH} ≥ 70% V _{DD}	ACTIVE
'0' Level V _{IL} ≤ 30% V _{DD}	High Z

HCMOS 5x3.2mm 2.5V SMD Oscillator



Model: F550H SERIES

RoHS Compliant / Pb Free

Rev. 5/7/2009

Page 2 of 2

http://www.foxonline.com/need_a_sample.htm



• TAPE SPECIFICATIONS (millimeters)							
MODEL	A	B	C	D	E	F	STD Reel QTY
F550H Series	Ø1.5	4.0	8.0	5.5	12.0	1.5	1,000

• REEL SPECIFICATIONS (millimeters)							
MODEL	G	H	I	J	K	L	M
F550H Series	2.0	Ø13	Ø21	Ø62	Ø180	13.5	2.0

