



TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,
Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: tstsales@mail.taisaw.com Web: www.taisaw.com

Approval Sheet For Product Specification

Issued Date:

Product Name: SAW Filter 1228MHz SMD 3.0×3.0mm

TST Parts No.:TA0509A

Customer Parts No.:_____

Company:_____

Division:_____

Approved by :_____

Date:_____

Checked by:_____Elvis Chiu

Approval by:_____Francis Chen

Date:_____2005/08/05



TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,
Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: tstsales@mail.taisaw.com Web: www.taisaw.com

SAW Filter 1228 MHz

MODEL NO.: TA0509A

REV. NO.:1

A. MAXIMUM RATING:

1. Input Power Level: 5 dB_m
2. DC voltage: 3 V
3. Operating Temperature: -30°C to 85°C
4. Storage Temperature: -40°C to +85°C

RoHS Compliant
Lead free
Lead-free soldering



B. CHARACTERISTICS:

Terminating source impedance: $Z_S=50\Omega$


Terminating load impedance: $Z_L=50\Omega$ (balanced)

Item		Unit	Min.	Typ.	Max.
Center Frequency		MHz	-	1228	-
Insertion Loss	1218 ~ 1238 MHz	dB	-	3.4	4.4
Ripple	1218 ~ 1238 MHz	dB	-	0.9	1.7
Absolute Attenuation					
1 ~ 1088	MHz	dB	40	52	-
1088 ~ 1178	MHz	dB	32	50	-
1178 ~ 1190	MHz	dB	15	50	-
1268 ~ 1288	MHz	dB	13	29	-
1288 ~ 1378	MHz	dB	30	41	-
1378 ~ 1480	MHz	dB	36	54	-
1480 ~ 2500	MHz	dB	28	47	-
2500 ~ 4000	MHz	dB	13	20	-


C. TRANSFER FUNCTION :

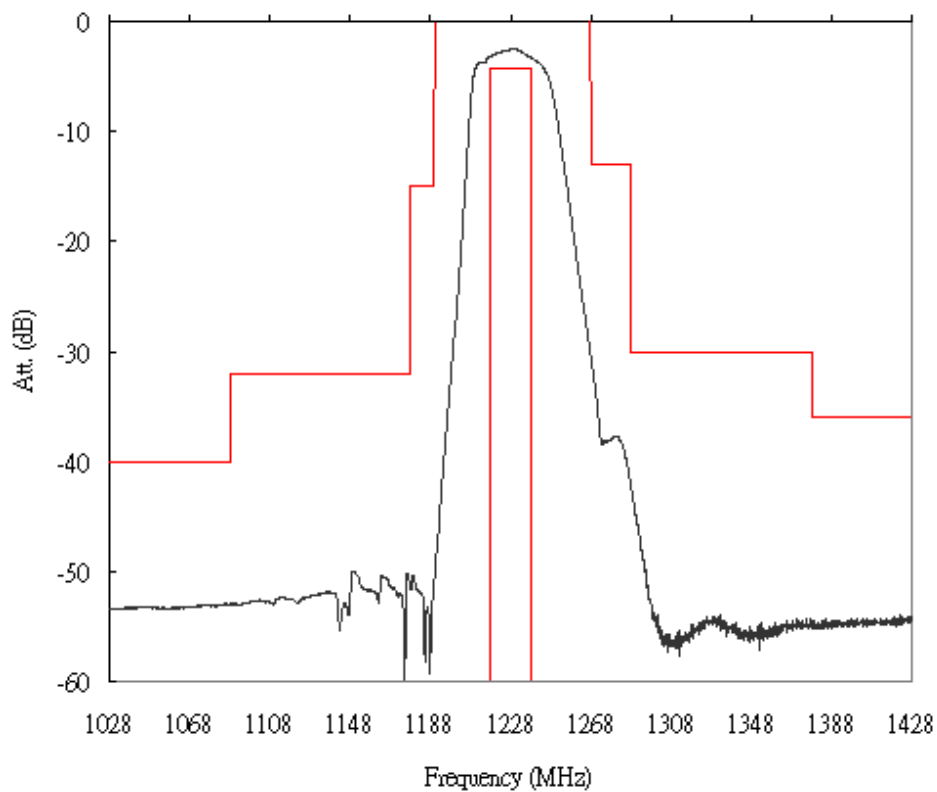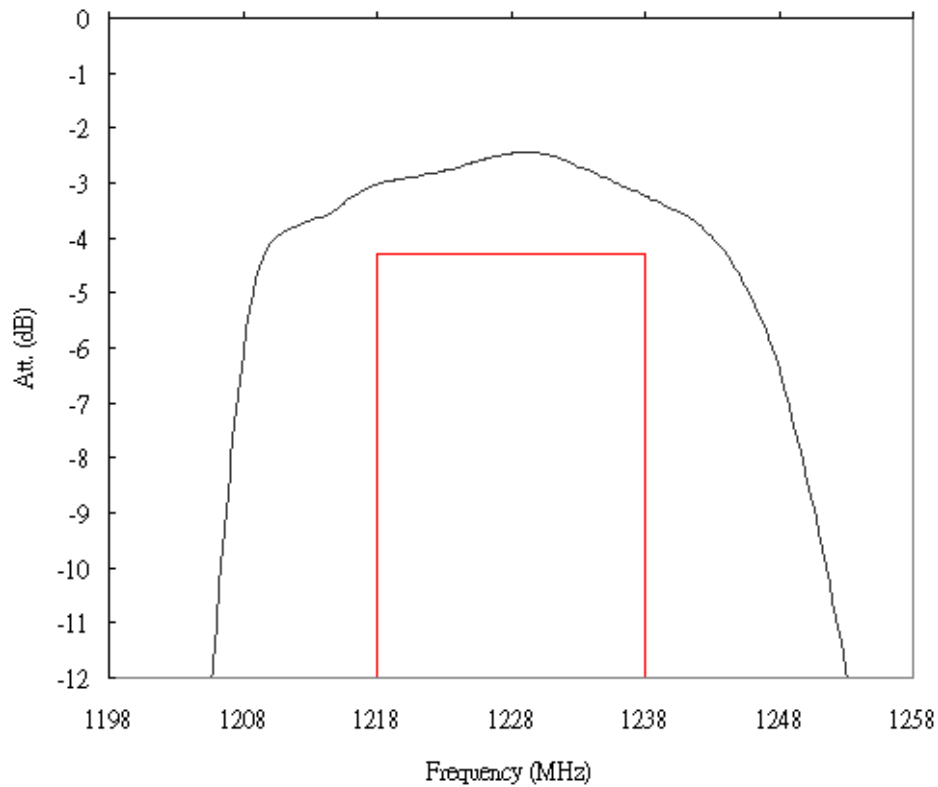


wideband

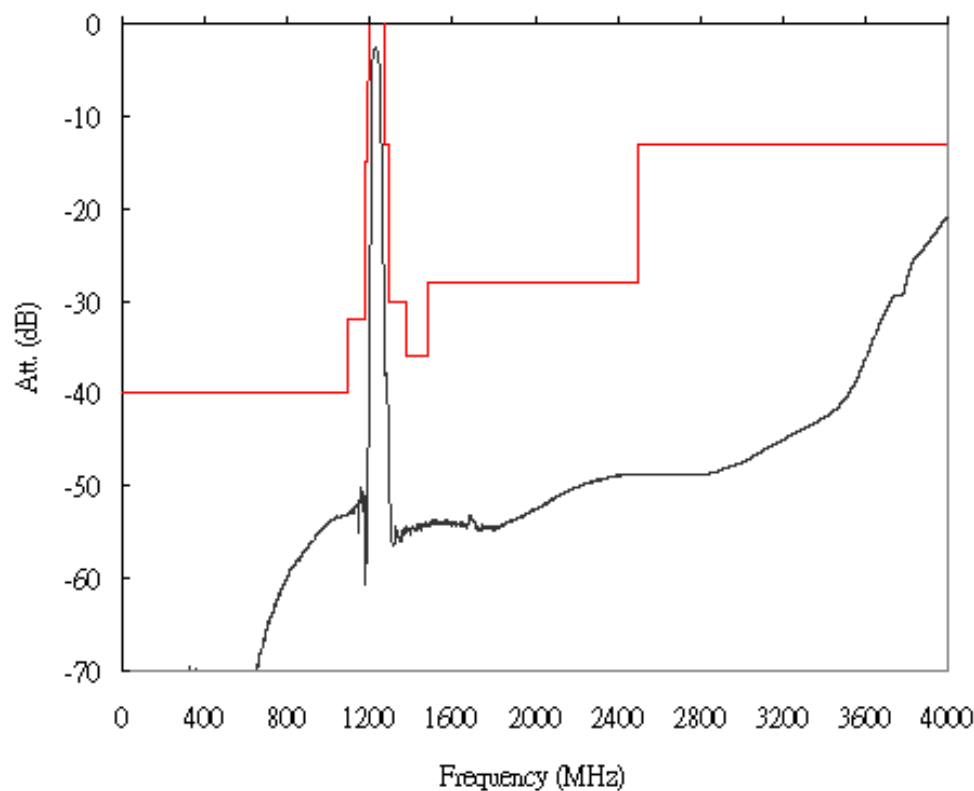


D.MEASUREMENT CIRCUIT::

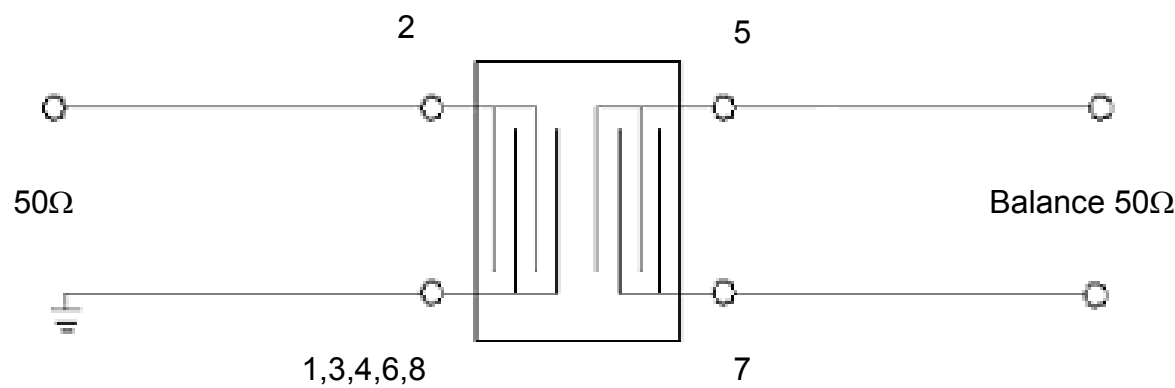

E.OUTLINE DRAWING:

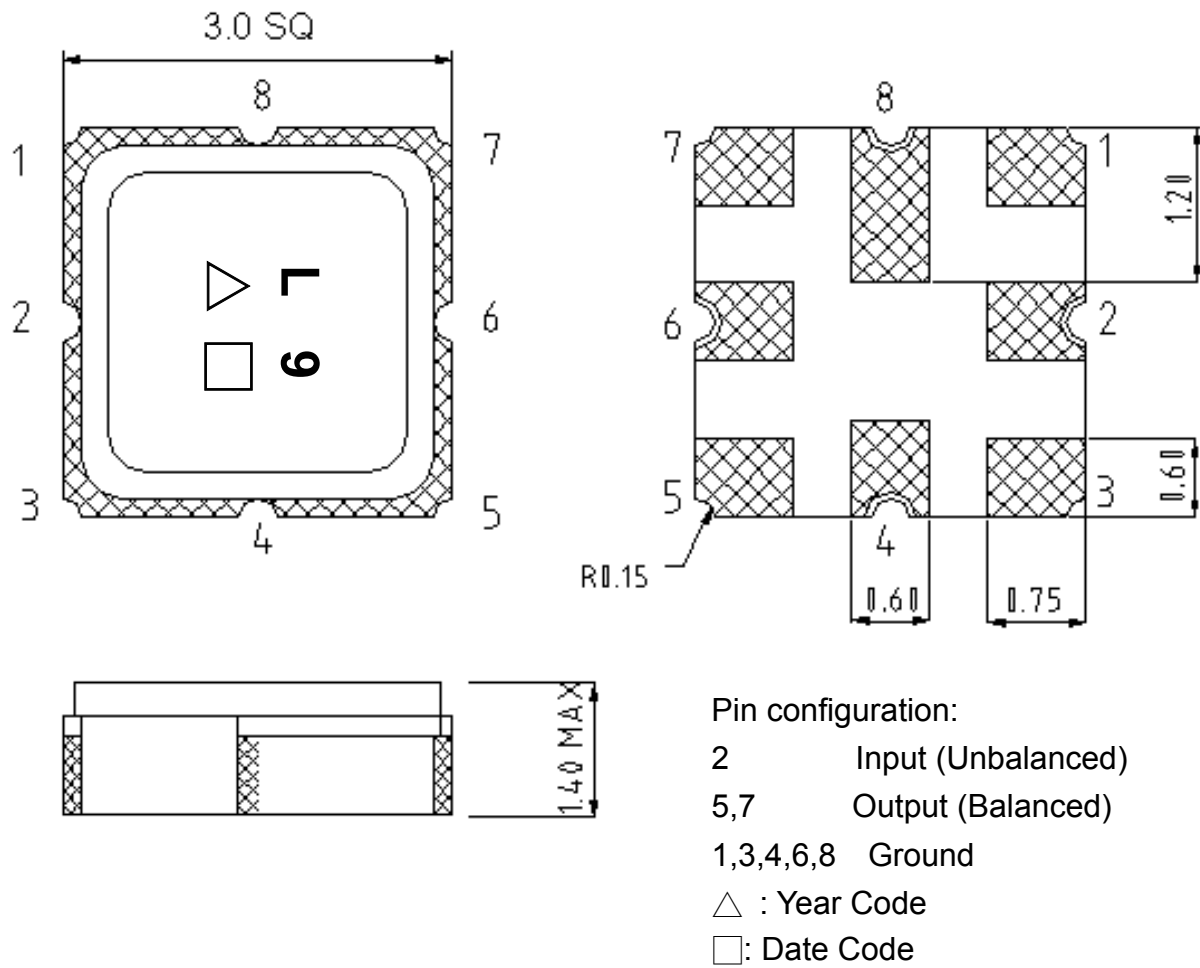


F.PCB FOOTPRINT:

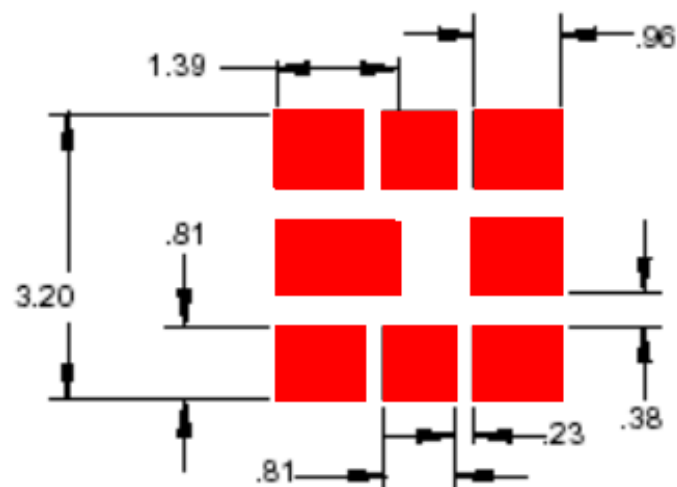

G. PACKING:

1. REEL DIMENSION

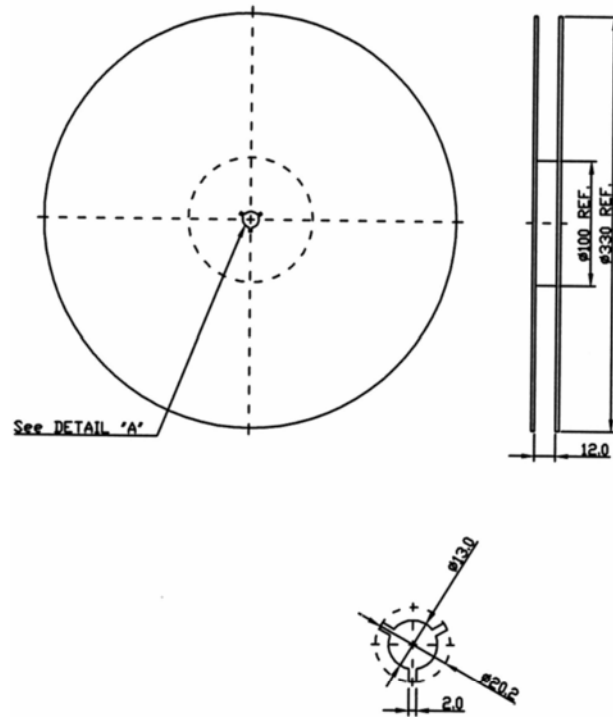

2. TAPE DIMENSION

